



10130G/W/C



Complies with standard EN60598-1 and any other specific standards.



Dimensions

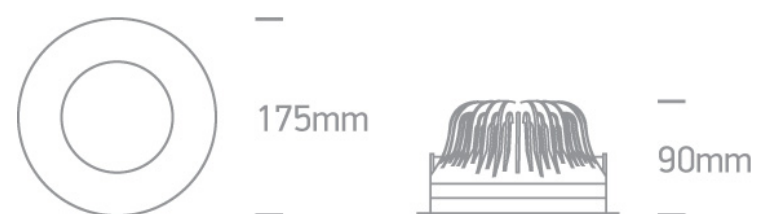

06 Downlights Fixed LED

The Outdoor/Bathroom IP65 Range Die cast

10130G/W/C

White



Die Cast


Circular

90mm


Diameter	175mm
Cutout Hole Diameter	160mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	


Fitting	
Input Type	Constant Current
Input Current	750mA
Voltage	37V
Safety Class	
Power(Watts)	27,75W
IP Rating	IP65
Light Source	LED built in

LED Type
LED Brand
F Mark

COB
Cree


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
750mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
220-240V
Yes
Yes
20-31,5W
0,9
Yes
27-42V
IP20

No
Plastic
Cable
Kegu

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
2600lm
86,67lm/W
80
60°


Packing Info

Box Length

19cm

Box Width	19cm
Box Height	11,5cm
Box Weight	1,04kg
Pcs/Carton	8
Barcode	5291889051916
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	3 Years
Weee Directive	Yes