

06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

10140F/W/W



40W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 1000mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

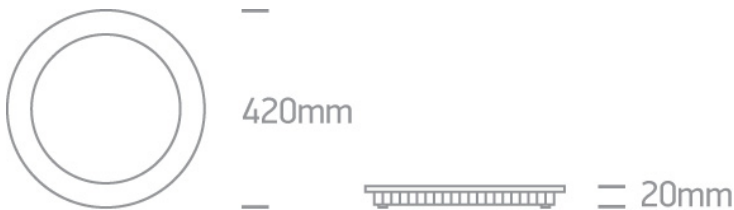

Gallery



Physical Specification

|                   |                                           |
|-------------------|-------------------------------------------|
| Item Group        | 06 Downlights Fixed LED                   |
| Family            | The 40-48W Round Recessed Panels Die Cast |
| Order Code        | 10140F/W/W                                |
| Colour            | White                                     |
| Material          | Die Cast                                  |
| Diffuser Material | Acrylic                                   |
| Shape             | Circular                                  |

|                      |       |
|----------------------|-------|
| Height               | 20mm  |
| Diameter             | 420mm |
| Cutout Hole Diameter | 408mm |
| Recessed Ceiling     | Yes   |
| Depth Required       | 40mm  |
| Indoor               | Yes   |
| Adjustable           | No    |

Electrical Characteristics

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Gear             | External-Included                                                                     |
| Fitting + Driver |                                                                                       |
| Input Voltage    | 220-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Safety Class     |  |
| Power(Watts)     | 40W                                                                                   |
| IP Rating        | IP40                                                                                  |
| Light Source     | LED built in                                                                          |
| Dimmable         | No                                                                                    |
| F Mark           |  |

|               |                                                                                       |
|---------------|---------------------------------------------------------------------------------------|
| Fitting       |                                                                                       |
| Input Type    | Constant Current                                                                      |
| Input Current | 1000mA                                                                                |
| Voltage       | 38V                                                                                   |
| Safety Class  |  |
| Power(Watts)  | 38W                                                                                   |
| IP Rating     | IP40                                                                                  |
| Light Source  | LED built in                                                                          |
| LED Type      | SMD 2016                                                                              |

|            |
|------------|
| LED Brand  |
| LED Number |
|            |

|         |
|---------|
| Epistar |
| 300     |
|         |

Gear

|                  |
|------------------|
| Gear Type        |
| Input Voltage    |
| 50 Hz            |
| 60 Hz            |
| Power(Watts)     |
| Power Factor     |
| Constant Current |
| 1000mA           |
| IP Rating        |
| Safety Class     |
| Dimmable         |
| Ambient Temp     |
| Operating Temp   |
| Housing Material |
| Brand            |
| Protection       |

|                                                                                       |
|---------------------------------------------------------------------------------------|
| Led Driver                                                                            |
| 220-240V                                                                              |
| Yes                                                                                   |
| Yes                                                                                   |
| 34-38W                                                                                |
| 0,9                                                                                   |
| Yes                                                                                   |
| 34-38V                                                                                |
| IP20                                                                                  |
|  |
| No                                                                                    |
| 40°C                                                                                  |
| 85°C                                                                                  |
| Plastic                                                                               |
| Eaglerise                                                                             |
| Open Circuit/Short Circuit                                                            |

Illumination Data

|                      |
|----------------------|
| Colour Temperature   |
| Lumen Output         |
| Light Efficiency     |
| CRI                  |
| Beam Angle           |
| Illumination Diagram |

|                                                                                       |
|---------------------------------------------------------------------------------------|
| 3000K                                                                                 |
| 3400lm                                                                                |
| 85lm/W                                                                                |
| 80                                                                                    |
| 120°                                                                                  |
|  |

Packing Info

|            |               |
|------------|---------------|
| Box Length | 46cm          |
| Box Width  | 46cm          |
| Box Height | 7cm           |
| Box Weight | 2,45Kg        |
| Pcs/Carton | 5             |
| Barcode    | 5291889040651 |
| HS Code    | 9405409900    |

Certification & Warranty

|                  |             |
|------------------|-------------|
| Warranty         | 2 Years     |
| Average Lifetime | 30000 hours |
| Weee Directive   | Yes         |