

08 Downlights Adjustable LED>The COB Extractable Range

11112F/W/C



12W LED adjustable COB Extractable Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

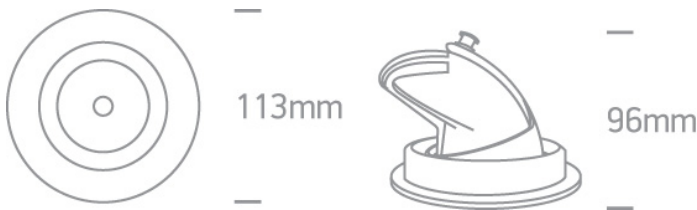

Gallery



Must be ordered separately



89015A

Related items



89015AT

Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Extractable Range
Order Code	11112F/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	96mm
Diameter	113mm
Cutout Hole Diameter	102mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand
Cable Length
F Mark

Epistar
40cm


Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


4000K
1100lm
91,67lm/W
80
50°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

12cm
12cm
10cm
0,425Kg
36
5291889048589
9405409900

Energy Label

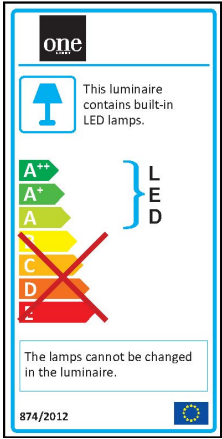

Warranty

3 Years

Weee Directive

Yes