

04 Recessed Spots Adjustable LED>The Interchangeable Rings Range

11112H/B/W

Aluminium



12W COB LED adjustable recessed spot with interchangeable rings.

Ring must be ordered separately.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

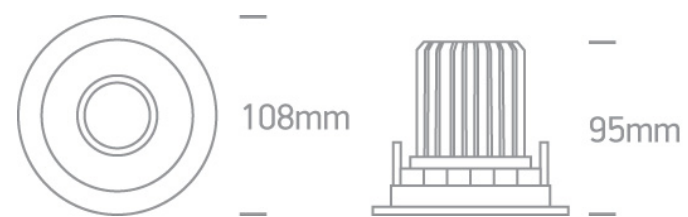

Must be ordered separately



050086/B



050086/BS



050086/G



050086/W





050086A/W


Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The Interchangeable Rings Range Aluminium
Order Code	11112H/B/W
Colour	Black
Material	Aluminium
Shape	Circular


Height	95mm
Diameter	108mm
Cutout Hole Diameter	90mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	36V
Safety Class	
Power(Watts)	10,8W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand
LED Number
F Mark

Cree
1


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
300mA
IP Rating
Safety Class
Dimmable
Brand

Led Driver
100-240V
Yes
Yes
9-12W
0,9
Yes
30-40V
IP20

No
Eaglerise

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
940lm
80lm/W
80
60°


Packing Info

Box Length
Box Width
Box Height

12cm
12cm
12cm

Box Weight	0,401Kg
Pcs/Carton	30
Barcode	5291889054078
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes