

04 Recessed Spots Adjustable LED>The 12W COB Range

11112/W/W



12W COB LED Recessed Adjustable Spot.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards



Downloads



Dimensions

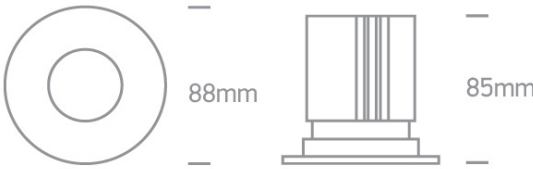

Must be ordered separately



89015A

Related items



89015AT

Physical Specification

Item Group

04 Recessed Spots Adjustable LED



Family
Order Code
Colour
Material
Shape
Height
Diameter
Cutout Hole Diameter
Recessed Ceiling
Depth Required
Indoor
Adjustable

The 12W COB Range
11112/W/W
White
Die Cast
Circular
88mm
85mm
76mm
Yes
90mm
Yes
1 Direction


Electrical Characteristics

Fitting

Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number
Cable Length
F Mark

Constant Current
700mA
14-16V

12W
IP20
LED built in
COB
Epistar
1
40cm


Illumination Data

Colour Temperature	3000K
Lumen Output	1100lm
Light Efficiency	91,67lm/W
CRI	90
Beam Angle	38°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	11cm
Box Width	9cm
Box Height	9cm
Box Weight	0,304Kg
Pcs/Carton	50
Barcode	5291889034940
HS Code	9405409900

Certification & Warranty

Warranty	5 Years
----------	---------