

08 Downlights Adjustable LED>The COB Retro Downlights Aluminium

11120C/W/W



20W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions

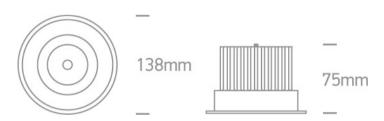

Gallery





Physical Specification


Item Group	08 Downlights Adjustable LED
Family	The COB Retro Downlights Aluminium
Order Code	11120C/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	75mm

Diameter	138mm
Cutout Hole Diameter	125mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes
Adjustable	1 Direction
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	39V
Safety Class	
Power(Watts)	19,5W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Sanan
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	13,5-21W
Power Factor	0,9
Constant Current	Yes
500mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud
Illumination Data	
Colour Temperature	3000K
Colour Temperature	3000K 1500lm
Lumen Output	1500lm
Lumen Output Light Efficiency	1500lm 75lm/W
Lumen Output Light Efficiency CRI	1500lm 75lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	1500lm 75lm/W
Lumen Output Light Efficiency CRI	1500lm 75lm/VV 80 38°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1500lm 75lm/VV 80 38°
Lumen Output Light Efficiency CRI Beam Angle	1500lm 75lm/VV 80 38°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1500lm 75lm/VV 80 38°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1500lm 75lm/W 80 38°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	1500lm 75lm/W 80 38° 14,5cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	1500lm 75lm/W 80 38° 14,5cm

Pcs/Carton	30
Barcode	5291889042259
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes