



08 Downlights Adjustable LED>The COB Recessed Range Die cast

11125RA/W/C



25W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery






Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Recessed Range Die cast
Order Code	11125RA/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	125mm

Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	40V
Safety Class	
Power(Watts)	28W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

18-30W

Power Factor

0,9

Constant Current

Yes

700mA

25.5-43V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

80°C

Housing Material

Plastic

Brand

Eaglerise

Protection

Short circuit Protection

Illumination Data

Colour Temperature

4000K

Lumen Output

1900lm

Light Efficiency

76lm/W

CRI

80

Beam Angle

36°

Illumination Diagram




Dark Light

Yes

Packing Info

Box Length	20,5cm
Box Width	15cm
Box Height	15cm
Box Weight	1Kg
Pcs/Carton	12
Barcode	5291889047766
HS Code	9405409900

Energy Label

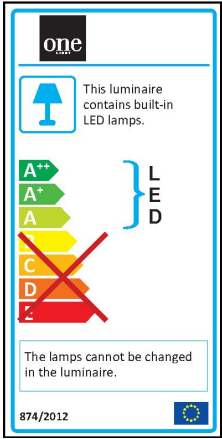

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes