

08 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11125R/W/W



25W LED adjustable COB Pop Out Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

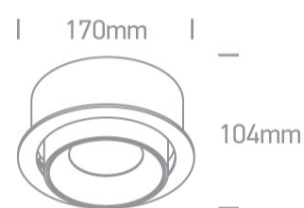

Gallery




Must be ordered separately



89030A

## Related items

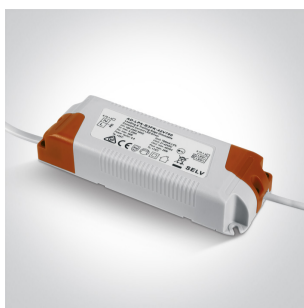

89030AT

## Physical Specification


Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11125R/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	104mm
Diameter	170mm
Cutout Hole Diameter	160mm
Recessed Ceiling	Yes
Depth Required	85mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

### Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand
Cable Length
F Mark

Bridgelux
40cm


### Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
2070lm
82,8lm/W
80
40°


### Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

22cm
22cm
16cm
1,75Kg
8
5291889046981
9405409900

### Energy Label

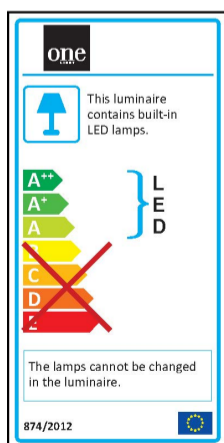

Warranty

---

3 Years

---

Weee Directive

---

Yes

---