

08 Downlights Adjustable LED>The COB Round Downlights Die cast

11150B/W/C



50W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

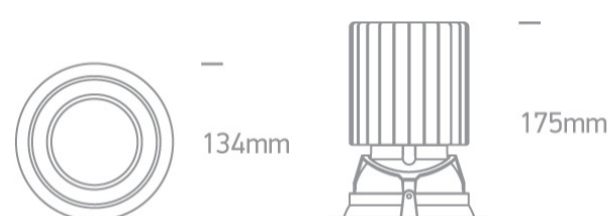

Gallery






Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Round Downlights Die cast
Order Code	11150B/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	175mm

Diameter	134mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	250mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	38V
Safety Class	
Power(Watts)	45,6W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

30-50,4W

Power Factor

0,9

Constant Current

Yes

1200mA

25-42V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

40°C

Operating Temp

75°C

Housing Material

Plastic

Brand

Eaglerise

Protection

Short circuit protection

## Illumination Data

Colour Temperature

4000K

Lumen Output

3850lm

Light Efficiency

77lm/W

CRI

80

Beam Angle

40°

Illumination Diagram



## Packing Info

Box Weight

1,25kg

Pcs/Carton

12


Barcode

5291889046721

HS Code

9405409900

## Energy Label

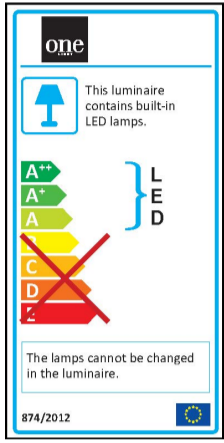

## Certification & Warranty

Warranty

3 Years

Weee Directive

Yes