

04 Recessed Spots Adjustable LED>The COB Pop Up

11207M/W/W



2x7W COB Pop Up range recessed adjustable LED spot, for general lighting applications.

Requires 700mA constant current LED drivers.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

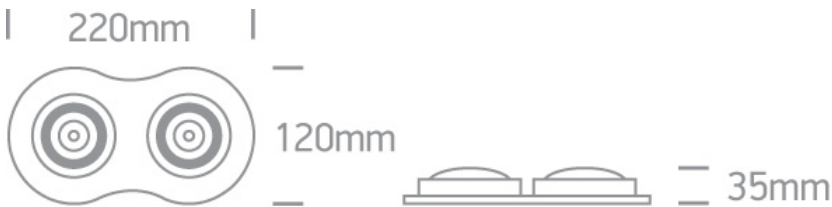

Must be ordered separately



89015A

Related items



89015AT

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
------------	----------------------------------



Family
Order Code
Colour
Material
Shape
Length
Width
Height
Cutout Hole Diameter
Recessed Ceiling
Depth Required
Indoor
Adjustable

The COB Pop Up
11207M/W/W
White
Aluminium
Rectangular
220mm
120mm
35mm
2x100mm
Yes
50mm
Yes
2 Directions


Electrical Characteristics

Fitting

Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number
Cable Length
F Mark

Constant Current
700mA
2X10V

2X7W
IP20
LED built in
COB
Cree
2
40cm


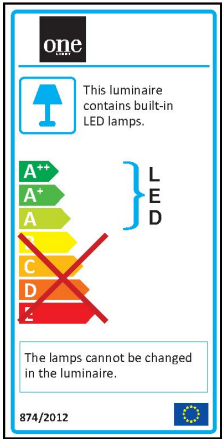
Illumination Data

Colour Temperature	3000K
Lumen Output	2X468lm
Light Efficiency	66,85lm/W
CRI	80
Beam Angle	35°
Illumination Diagram	

Packing Info

Box Length	18,5cm
Box Width	20cm
Box Height	4,5cm
Box Weight	0,59Kg
Pcs/Carton	20
Barcode	5291889034100
HS Code	9405409900

Energy Label



Warranty	3 Years
Weee Directive	Yes