




- IP65 slim LED connectable fitting .
- Stainless steel clips and suspension included.
- Polycarbonate body and diffuser.
- Supplied with non-dimmable LED driver.
- Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

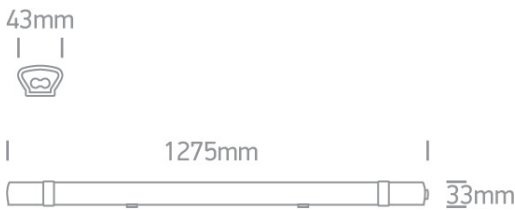

Gallery



Must be ordered separately



050084

Physical Specification

|                   |                                       |
|-------------------|---------------------------------------|
| Item Group        | 21 Industrial & Floodlights           |
| Family            | The IP65 LED Connectable Range Single |
| Order Code        | 38136LC/C                             |
| Colour            | White                                 |
| Material          | PC                                    |
| Diffuser Material | PC                                    |
| Shape             | Rectangular                           |
| Length            | 1275mm                                |
| Width             | 43mm                                  |
| Height            | 33mm                                  |
| Surface Ceiling   | Yes                                   |
| Surface Wall      | Yes                                   |
| Indoor            | Yes                                   |
| Outdoor           | Yes                                   |
| Adjustable        | No                                    |
| IK Rating         | 8                                     |

Electrical Characteristics

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Gear             | Built In                                                                              |
| Fitting + Driver |                                                                                       |
| Input Voltage    | 100-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Safety Class     |  |
| Power(Watts)     | 36W                                                                                   |
| IP Rating        | IP65                                                                                  |
| Light Source     | LED built in                                                                          |
| Dimmable         | No                                                                                    |

|              |                                                                                     |
|--------------|-------------------------------------------------------------------------------------|
| Cable Length | 50cm                                                                                |
| F Mark       |  |

Fitting

|              |                  |
|--------------|------------------|
| Input Type   | Constant Current |
| Power(Watts) | 36W              |
| IP Rating    | IP65             |
| Light Source | LED built in     |
| LED Type     | SMD 2835         |
| LED Brand    | Sanan            |

Gear

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Gear Type        | Led Driver                                                                            |
| Input Voltage    | 100-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Power(Watts)     | 36W                                                                                   |
| Power Factor     | 0,9                                                                                   |
| Constant Current | Yes                                                                                   |
| IP Rating        | IP20                                                                                  |
| Safety Class     |  |
| Dimmable         | No                                                                                    |
| Housing Material | Plastic                                                                               |
| Output Terminal  | Connector                                                                             |
| Brand            | Eaglerise                                                                             |

Illumination Data

|                    |          |
|--------------------|----------|
| Colour Temperature | 4000K    |
| Lumen Output       | 3100lm   |
| Light Efficiency   | 86,1lm/W |
| CRI                | 80       |

|                      |
|----------------------|
| Beam Angle           |
| Illumination Diagram |


|                                                                                     |
|-------------------------------------------------------------------------------------|
| 120°                                                                                |
|  |

Packing Info

|            |
|------------|
| Pcs/Carton |
| Barcode    |
| HS Code    |

|               |
|---------------|
| 20            |
| 5291889055464 |
| 9405104090    |

Energy Label

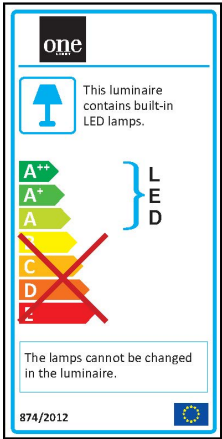

Certification & Warranty

|                |
|----------------|
| Warranty       |
| Weee Directive |

|         |
|---------|
| 2 Years |
| Yes     |