




21 Industrial & Floodlights>The Supermarket LED Linear Range Aluminium + PC

38136R/C

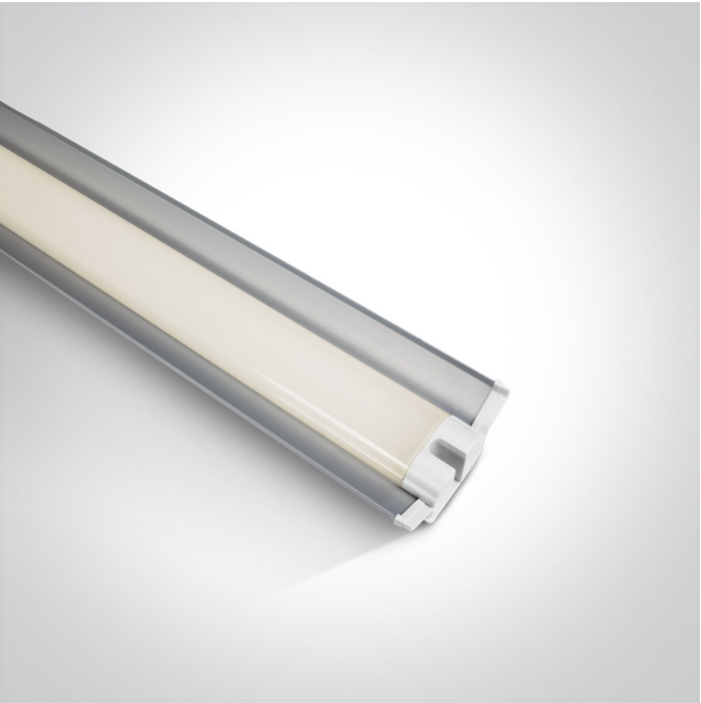

LED linear, ideal for supermarket applications. It can replace fluorescent fittings mounted on cable channels.

Supplied with 100-240V LED driver as standard.

Complies with standard EN60598-1 and any other specific standards.



Downloads





Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Supermarket LED Linear Range Aluminium + PC
Order Code	38136R/C
Colour	Grey
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	1200mm
Width	90mm
Height	40mm
Surface Ceiling	Yes
Indoor	Yes

Adjustable	No
Electrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	22W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Cable Length	100cm
F Mark	
Fitting	
Input Type	Constant Current
Input Current	560mA
Voltage	38V
Power(Watts)	21W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes

60 Hz
Power(Watts)
Power Factor
Constant Current
Output
Voltage Range
IP Rating

Yes
17-23W
0,9
Yes
560mA
30-41V
IP20

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


4000K
1880lm
85,45lm/W
80
120°


Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

1,3Kg
10
5291889037149
9405409900

Energy Label

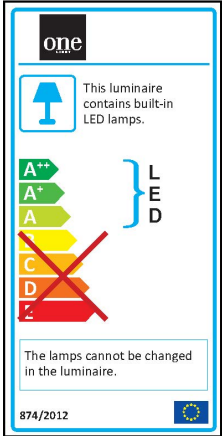

Warranty

2 Years

Weee Directive

Yes