



Special Offers>Industrial & Floodlights

38258L/C



IP65 LED fitting to replace T8 traditional waterproof fluorescent. Stainless steel clips and suspension included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

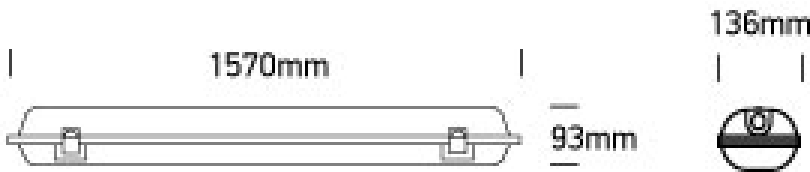

Physical Specification



Item Group	Special Offers
Family	Industrial & Floodlights
Order Code	38258L/C
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	1570mm
Width	136mm
Height	93mm
Surface Ceiling	Yes
Surface Wall	Yes

Indoor
Outdoor
Adjustable
IK Rating

Yes
Yes
No
6

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

Built In
220-240V
Yes
Yes

58W
IP65
LED built in
No



Fitting
Input Type
IP Rating
Light Source
LED Type
LED Brand
LED Number

Constant Current
IP65
LED built in
SMD 2835
Epistar
308

Gear
Gear Type
Input Voltage
50 Hz

Led Driver
220-240V
Yes

60 Hz
Power(Watts)
Power Factor
Constant Current
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Yes
58W
0,9
Yes
IP20

No
Plastic
Connector
Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram


4000K
5000lm
86,2lm/W
80


Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

3,02Kg
6
5291889046028
9405104090

Energy Label

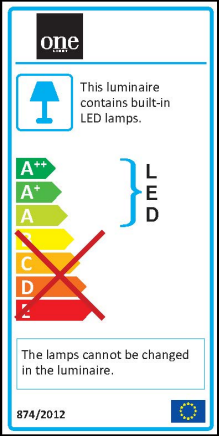

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes