



50105K/W/W



Dimensions

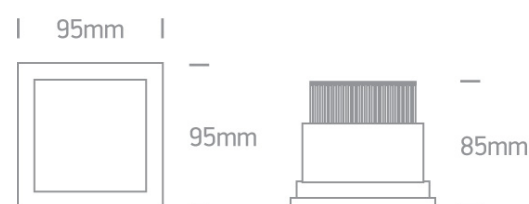

The figure consists of three separate images showing different perspectives of the LED module. The left image is a front view showing a square white frame with a central square lens. The middle image is a top view showing the black cylindrical component with a central pin and four mounting legs. The right image is a side view showing the square white frame and the black cylindrical component.



95mm

Width
Height
Cutout Hole Width
Cutout Hole Length
Recessed Ceiling
Depth Required
Indoor
Adjustable


95mm
85mm
85mm
85mm
Yes
115mm
Yes
No

Electrical Characteristics


Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

External-Included
220-240V
Yes
Yes

5W
IP53
LED built in
No


Fitting
Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source

Constant Current
400mA
10,5V

4,2W
IP53
LED built in

LED Brand
F Mark

GH


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
400mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal

Led Driver
220-240V
Yes
Yes
3-7W
0,8
Yes
6-14V
IP20

No
40°C
80°C
Plastic
Cable

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
240lm
48lm/W
80
100°


Packing Info

Box Length

13,5cm

Box Width	13cm
Box Height	11,5cm
Box Weight	0,450kg
Pcs/Carton	24
Barcode	5291889031116
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes