



50120K/G/C



Dimensions



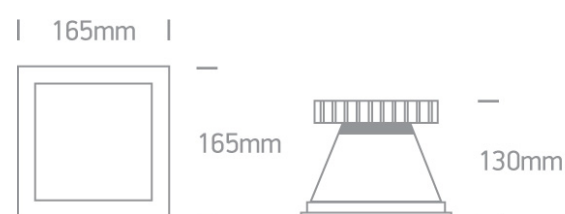

165mm

Width
Height
Cutout Hole Width
Cutout Hole Length
Recessed Ceiling
Depth Required
Indoor
Adjustable


165mm
130mm
147mm
147mm
Yes
160mm
Yes
No

Electrical Characteristics


Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

External-Included
220-240V
Yes
Yes

20W
IP53
LED built in
No


Fitting
Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source

Constant Current
700mA
28V

19,6W
IP53
LED built in

LED Brand
F Mark

GH


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal

Led Driver
220-240V
Yes
Yes
12,6-21,7W
0,9
Yes
18-31V
IP20

No
40°C
80°C
Plastic
Cable

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

Yellow
1060lm
53lm/W
80
100°


Packing Info

Box Weight

1,4kg

Pcs/Carton	12
Barcode	5291889028291
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes