

06 Downlights Fixed LED>Square UGR17 & UGR19 Office Panels Aluminium

50140U/W/C



60x60 UGR 17 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

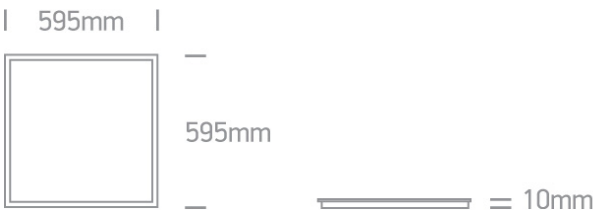

Accessories



050017

Related items



89050L



89050TLD

Physical Specification



Item Group	06 Downlights Fixed LED
------------	-------------------------

Family
Order Code
Colour
Material
Shape
Length
Width
Height
Recessed T-Ceiling
Depth Required
Indoor
Adjustable

Square UGR17 & UGR19 Office Panels Aluminium
50140U/W/C
White
Aluminium
Rectangular
595mm
595mm
10mm
Yes
55mm
Yes
No


Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark


External-Included
220-240V
Yes
Yes

40W
IP20
LED built in
No


Fitting
Input Type
Input Current
Voltage

Constant Current
1000mA
36V

Safety Class	
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Sanan

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25-42W
Power Factor	0,9
Constant Current	Yes
1000mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	No-Load, Short Circuit

Illumination Data

Colour Temperature	4000K
Lumen Output	3400lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	120°

Illumination Diagram



UGR

17

Packing Info

Box Weight

2,4Kg

Pcs/Carton

6


Barcode

5291889054894

HS Code

9405109890

Energy Label

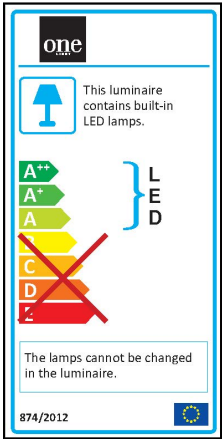

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes