

06 Downlights Fixed LED>The 48W Square Panels Aluminium

50148U/W/D



UGR19 60x60 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

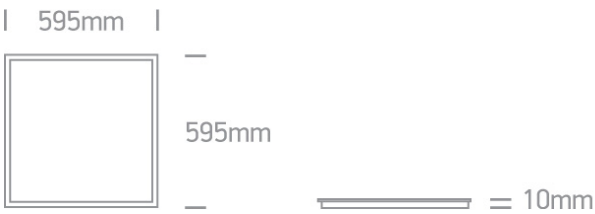

Must be ordered separately



89048

Accessories



050017



050108

Related items

		
89048T	89050L	89050TLD

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The 48W Square Panels Aluminium
Order Code	50148U/W/D
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular
Length	595mm
Width	595mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	1200mA
Safety Class	III
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

Illumination Data

Colour Temperature	6000K
Lumen Output	4100lm
Light Efficiency	85,41lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	
UGR	19

Packing Info

Box Length	72cm
Box Width	65cm
Box Height	4,5cm
Box Weight	3,2Kg
Pcs/Carton	6
Barcode	5291889044581
HS Code	9405109890

Certification & Warranty

Warranty
Average Lifetime
Weee Directive

2 Years
30000 hours
Yes