



COB LED recessed spot. Very elegant design with unique design of the reflector. Ideal for replacing halogen spots.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification



Item Group	04 Recessed Spots Adjustable LED
Family	The COB Square Spots Aluminium
Order Code	51110A/AL/W
Colour	Aluminium
Material	Aluminium
Shape	Rectangular
Length	120mm
Width	120mm
Height	70mm
Cutout Hole Diameter	100mm
Recessed Ceiling	Yes
Depth Required	100mm

Indoor
Adjustable



Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

External-Included
100-240V
Yes
Yes

10W
IP20
LED built in
No



Fitting
Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source
LED Brand
LED Number
F Mark

Constant Current
250mA
38V

9,5W
IP20
LED built in
Citizen
1


Gear
Gear Type

Led Driver

Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
250mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal

100-240V
Yes
Yes
7,5-10W
0,9
Yes
30-40V
IP20

No
45°C
85°C
Plastic
Cable

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
825lm
82,5lm/W
80
36°


Packing Info

Box Length
Box Width
Box Height
Pcs/Carton
Barcode
HS Code

15cm
14cm
9,5cm
20
5291889033370
9405409900

Energy Label

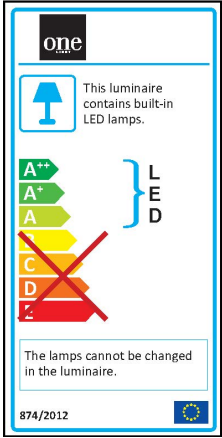

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes