


08 Downlights Adjustable LED>The COB Shop Range Die cast

51125/G/C

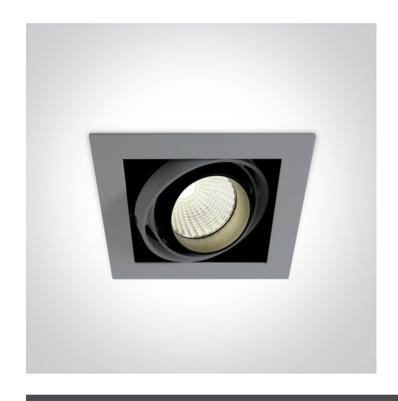

25W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions



Gallery



Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Shop Range Die cast
Order Code	51125/G/C
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	148mm

Width	148mm
Height	120mm
Cutout Hole Width	130mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes
Depth Required	160mm
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
Gear	External-Included
Etation - Daline	
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	600mA
Voltage	40V
Safety Class	
Power(Watts)	24W
IP Rating	IP20


LED built in

Light Source

LED Type	СОВ
LED Brand	Cree
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	16,2-25,2W
Power Factor	0,9
Constant Current	Yes
600mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	70°C
Operating Temp	40°C
Housing Material	Plastic
Brand	Lifud
Illumination Data	
Colour Temperature	4000K
Lumen Output	1750lm
Light Efficiency	64,47lm/W
CRI	80
Beam Angle	38°
Illumination Diagram	
Packing Info	
Box Length	18cm

Box Width	18cm
Box Height	15cm
Box Weight	1,08kg
Pcs/Carton	12
Barcode	5291889035541
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes