


# 08 Downlights Adjustable LED>The COB Shop Range Die cast

# 51138/G/C

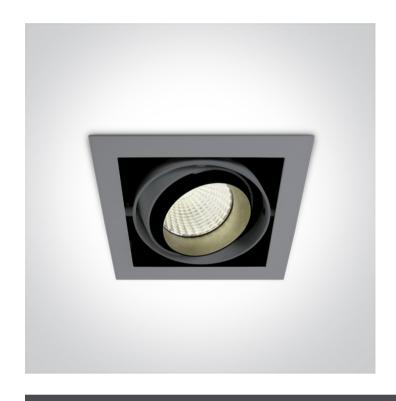

38W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




#### Downloads





## Dimensions



## Gallery



### **Physical Specification**

Item Group	08 Downlights Adjustable LED
Family	The COB Shop Range Die cast
Order Code	51138/G/C
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	196mm

Width	196mm
Height	165mm
Cutout Hole Width	170mm
Cutout Hole Length	170mm
Recessed Ceiling	Yes
Depth Required	200mm
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
Gear	External-Included
Entre - Britain	
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	900mA
Voltage	42V
Safety Class	
Power(Watts)	37,8W

IP20

LED built in


IP Rating

Light Source

LED Type	СОВ
LED Brand	Cree
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	24,3-37,8W
Power Factor	0,9
Constant Current	Yes
900mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	70°C
Operating Temp	40°C
Housing Material	Plastic
Brand	Lifud
Ilumination Data	
Colour Tomorovatura	40001/
Colour Temperature	4000K 2450lm
Light Efficiency	64,47lm/W
CRI	80
	38°
Beam Angle  Illumination Diagram	30 ————————————————————————————————————
Packing Info	
Box Length	23cm

Box Width	20,5cm
Box Height	18cm
Box Weight	1,9kg
Pcs/Carton	8
Barcode	5291889035480
HS Code	9405409900

# Energy Label



## Certification & Warranty

Warranty	2 Years
Weee Directive	Yes