

15 Plafo>LED Aluminium Panel Range

62140AE/W/C



40W 60x60cm LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.

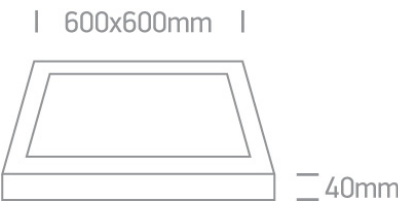
Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	15 Plafo
Family	LED Aluminium Panel Range
Order Code	62140AE/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	600mm
Width	600mm
Height	40mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	
Fitting	
Input Type	Constant Current
Input Current	950mA
Voltage	40V
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
F Mark	
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)
Power Factor
Constant Current
950mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Fast Connector
Fast Connector Type
Brand

28,5-38W
0,9
Yes
30-40V
IP20

No
40°C
80°C
Plastic
Cable
Yes
Other
Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram

4000K
3600lm
90lm/W
80

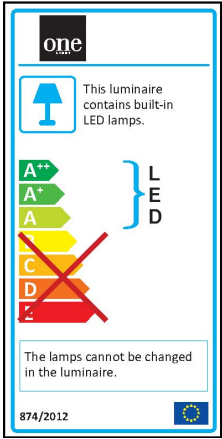

Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Carton Length
Carton Width

65cm
65cm
8,5cm
3,85kg
4
66cm
36cm

Carton Height	66cm
Carton Weight	15,8Kg
Barcode	5291889052159
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes