

20 Garden & Underwater>The LED Bollards Range Cone reflector

67410/AN/W



12W LED Bollard, IP65 for Garden illumination.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	20 Garden & Underwater
Family	The LED Bollards Range Cone reflector
Order Code	67410/AN/W
Colour	Anthracite
Material	Die Cast
Diffuser Material	PC
Shape	Circular
Height	800mm
Diameter	120mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

IK Rating

8

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

250mA

Voltage

44V

Power(Watts)

11W

IP Rating

IP65

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Edison

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)
Power Factor
Constant Current
250mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand
Protection

9-12W
0,9
Yes
36-48V
IP20

No
55°C
85°C
Plastic
Connector
Eaglerise
Short Circuit

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram


3000K
1000lm
83,33lm/W
80


Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

3,45Kg
2
5291889052319
9405409900

Energy Label

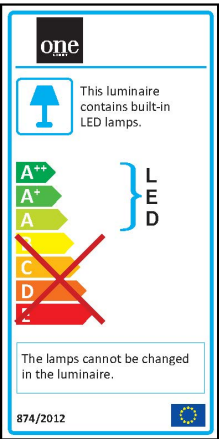

Certification & Warranty

Warranty	3 Years
Average Lifetime	50000hours
Weee Directive	Yes