


### 21 Industrial & Floodlights>The LED Park Lantern Die cast

# 70105/AN/C

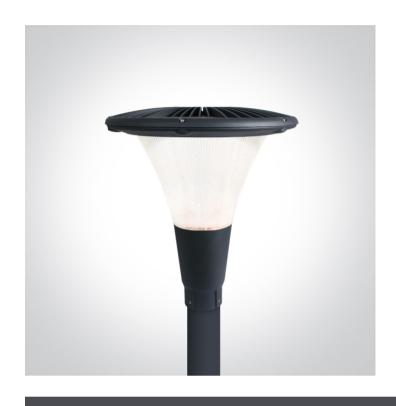

LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



#### Downloads









#### Dimensions



#### **Physical Specification**

Item Group	21 Industrial & Floodlights
Family	The LED Park Lantern Die cast
Order Code	70105/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Circular
Height	511mm
Diameter	460mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	1700mA
Input Current Voltage	1700mA 29V
Voltage	29V
Voltage Power(Watts)	29V 49W
Voltage Power(Watts)  IP Rating	29V 49W IP65
Voltage Power(Watts)  IP Rating  Light Source	29V 49W IP65 LED built in
Voltage Power(Watts)  IP Rating  Light Source  LED Type  LED Brand	29V 49W IP65 LED built in COB
Voltage Power(Watts)  IP Rating  Light Source  LED Type	29V 49W IP65 LED built in COB
Voltage Power(Watts)  IP Rating  Light Source  LED Type  LED Brand	29V 49W IP65 LED built in COB
Voltage  Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  Gear	29V 49W IP65 LED built in COB Epistar
Voltage Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  Gear  Gear Type	29V  49W  IP65  LED built in  COB  Epistar
Voltage Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  Gear  Gear Type  Input Voltage	29V  49W  IP65  LED built in  COB  Epistar  Led Driver  100-240V
Voltage Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  Gear  Gear  John Source  Joh	29V 49W IP65 LED built in COB Epistar  Led Driver 100-240V Yes

Constant Current	Yes
1700mA	27-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell

Illumination Data	
Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	80lm/W
CRI	70
Beam Angle	60°
Illumination Diagram	

Packing Info	
Box Weight	10,4Kg
Pcs/Carton	1
Barcode	5291889047469
HS Code	9405409900

## Energy Label



Warranty	5 Years
Weee Directive	Yes

Certification & Warranty