


## 21 Industrial & Floodlights>The LED Floodlights

7022/G/D

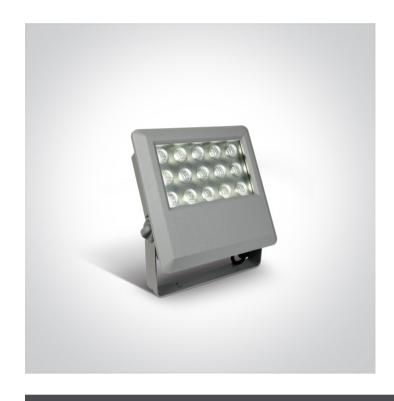

15x1W floodlight, IP65.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




### Downloads





### Dimensions



## Gallery



### Physical Specification

Item Group	21 Industrial & Floodlights
Family	The LED Floodlights
Order Code	7022/G/D
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	230mm

Width	220mm
Height	79mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	1 Direction
Electrical Characteristics	
Gear	Built In
Fitting . Driver	
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15x1W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	F
Fitting	
Input Type	Constant Current
Power(Watts)	15W
IP Rating	IP65
Gear	
Gear Type	Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	15W
Power Factor	0,5
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Protection	Short Circuit
Ilumination Data	
Ilumination Data  Colour Temperature	6000K
	6000K 1125lm
Colour Temperature	
Colour Temperature  Lumen Output	1125lm
Colour Temperature  Lumen Output  Light Efficiency	1125lm 75lm/W
Colour Temperature  Lumen Output  Light Efficiency  Beam Angle	1125lm 75lm/W
Colour Temperature  Lumen Output  Light Efficiency  Beam Angle  Illumination Diagram	1125lm 75lm/W
Colour Temperature  Lumen Output  Light Efficiency  Beam Angle  Illumination Diagram	1125lm 75lm/W
Colour Temperature  Lumen Output  Light Efficiency  Beam Angle	1125lm 75lm/W
Colour Temperature  Lumen Output  Light Efficiency  Beam Angle  Illumination Diagram	1125lm 75lm/W 40°
Colour Temperature  Lumen Output  Light Efficiency  Beam Angle  Illumination Diagram  Packing Info  Pcs/Carton	1125lm 75lm/W 40°

# Energy Label



Weee Directive

Certification & Warranty	
Warranty	2 Years

Yes