

21 Industrial & Floodlights>The COB LED Slim Floodlights

7028A/AN/W



10W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

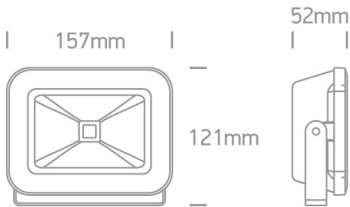

Physical Specification



Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Floodlights
Order Code	7028A/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	157mm
Width	121mm
Height	52mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor
Adjustable

Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
Cable Length
F Mark

Built In
100-240V
Yes
Yes

10W
IP65
LED built in
No
100cm



Fitting
Input Type
Input Current
Voltage
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand

Constant Current
300mA
32V
9,6W
IP65
LED built in
COB
Epistar

Gear
Gear Type
Input Voltage

Led Driver
100-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
300mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal

Yes
Yes
7,2-12W
0,9
Yes
24-40V
IP20

No
Plastic
Connector

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
700lm
70lm/W
70
120°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

14,5cm
5,5cm
16cm
0,8Kg
20
5291889027072
9405409900

Energy Label



Certification & Warranty

Warranty

3 Years

Weee Directive

Yes