



21 Industrial & Floodlights>The Glass Face AC LED Floodlights

7028AG/W/C



10W AC LED flood light with adjustable mounting bracket.

IP65 rated for outdoor use.

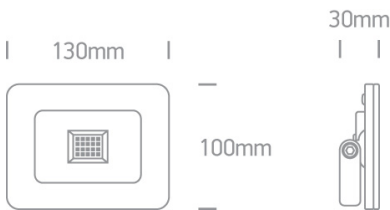
Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification



Item Group	21 Industrial & Floodlights
Family	The Glass Face AC LED Floodlights
Order Code	7028AG/W/C
Colour	White
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	130mm
Width	100mm
Height	30mm
Surface Ceiling	Yes
Surface Wall	Yes

Surface Floor/Ground
Outdoor
Adjustable

Yes
Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
Cable Length
F Mark

No
220-240V
Yes
Yes

10W
IP65
LED built in
No
50cm


Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
800lm
80lm/W
80
100°

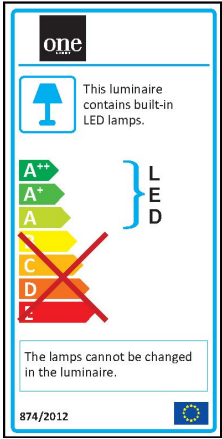

Packing Info

Box Length
Box Width

12cm
5.4cm

Box Height	13.7cm
Pcs/Carton	20
Barcode	5291889050070
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes