


7028AR/G/C



Complies with standard EN60598-1 and any other specific standards.



Dimensions



21 Industrial & Floodlights

Item Group	21 Industrial & Floodlights
Family	The Rechargeable LED Floodlights Die cast
Order Code	7028AR/G/C
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	240mm
Width	150mm
Height	165mm
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes

Adjustable

1 Direction

Electrical Characteristics

Gear

Built In

Fitting + Driver

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Voltage

8,4V

Safety Class



Power(Watts)

10W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

Gear

Gear Type

Led Driver

Power(Watts)

10W

Power Factor

0,9

Constant Current

Yes

IP Rating

IP20

Safety Class
Dimmable
Housing Material
Output Terminal



No

Plastic

Connector

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K

700lm

70lm/W

75

120°



Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

15,5cm

12cm

21,5cm


1,2Kg

12

5291889038450

9405409900

Energy Label

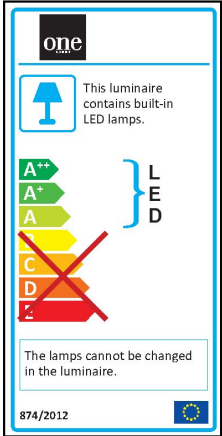

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes