

7030/AN/C



Supplied with non-dimmable LED driver.


standards.



IP54



Dimensions



195mm

A black and white photograph of a small, square, black electronic device. The device has a screen displaying a grid of small, circular icons. It is mounted on a stand with a single leg. The device is positioned on a light-colored surface, casting a shadow to the left.

21 Industrial & Floodlights

The LED Floodlights

7030/AN/C

Anthracite



Die Cast

Rectangular

158mm


Height	195mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	2 Directions

Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8x1W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	20V
Power(Watts)	7W
IP Rating	IP54

Gear	
Gear Type	Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	6,3-11,5W
Power Factor	0,95
Constant Current	Yes
350mA	18-33V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-20 ~ 50°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Connector


Illumination Data

Colour Temperature	4000K
Lumen Output	600lm
Light Efficiency	75lm/W
Beam Angle	20°
Illumination Diagram	

Packing Info

Pcs/Carton	12
Barcode	5291889030393
HS Code	9405409900

Energy Label

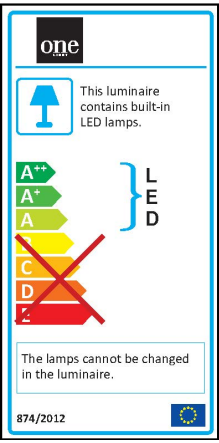

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes