

21 Industrial & Floodlights>The Classic LED Floodlights Die cast

7032/AN/C



150W Classic LED floodlight, IP65.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification



Item Group	21 Industrial & Floodlights
Family	The Classic LED Floodlights Die cast
Order Code	7032/AN/C
Colour	Anthracite
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	450mm
Width	260mm
Height	185mm
Surface Ceiling	Yes
Surface Wall	Yes

Surface Floor/Ground
Outdoor
Adjustable

Yes
Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

Built In
100-240V
Yes
Yes

150W
IP65
LED built in
No



Fitting
Input Type
Input Current
Voltage
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand

Constant Current
4500mA
33V
148,5W
IP65
LED built in
COB
Epistar

Gear
Gear Type
Input Voltage

Led Driver
100-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
Output
Voltage Range
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Yes
Yes
121,5-162W
0,95
Yes
4500mA
27-36V
IP20

No
Plastic
Connector
Meanwell

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


4000K
12000lm
80lm/W
70
120°


Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

8,6Kg
1
5291889032731
9405409900

Energy Label

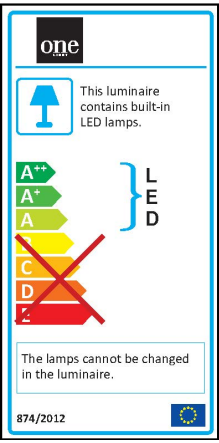

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes