

Flex Lightline, with SMD2216 LEDs, 192LEDs/meter, 10W/meter.Supplied in 5 meters roll .

Can be cut every 3cm.

Requires 24V DC constant voltage LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads




Dimensions



Gallery



Accessories



7811E



7811F

Related items



20030

Physical Specification


Item Group	09 LED Strips & Profiles
Family	IP67 Flex Lightline
Order Code	7811/W
Material	Silicone
Shape	Rectangular
Length	5000mm
Width	10mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics

Fitting	
Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	III
Power(Watts)	10W/m
IP Rating	IP67
Light Source	LED built in
LED Type	SMD 2216
LED Brand	Epistar

LED Number	192LEDs/m
F Mark	


Illumination Data

Colour Temperature	3000K
Lumen Output	550lm/m
Light Efficiency	55lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Length	32cm
Box Width	32cm
Box Height	2,5cm
Box Weight	0,69kg
Pcs/Carton	40
Barcode	5291889055815
HS Code	9405403990

Energy Label

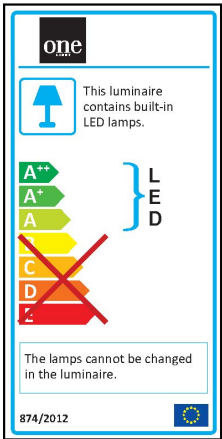

Warranty

3 Years

Weee Directive

Yes