

PRODUCT CATALOG

7 Line Cylindrical Lever Locks



Experience a safer and more open world

Table of Contents



| Overview | | 3 |
|-----------------------------------|----|---|
| Certifications | | 4 |
| Technical Details | | |
| Lever & Rose Designs | | |
| Functions | | |
| Cylinders | | |
| Latches | | |
| Strikes | | |
| Mechanical & Cylinder Options | | |
| Finishes, Packaging | | |
| How to Order, Miscellaneous Parts | 14 | 4 |
| Architectural Specifications | 1! | ō |

MICROSHIELD®

ASSA ABLOY Group companies offer MicroShield®, an anti-microbial coating for door hardware. MicroShield uses proven silver ion-based technology from Agion®, a leading provider of antimicrobial solutions, to stem the spread of bacteria and other microbes.

MicroShield® is a trademark of ASSA ABLOY Access and Egress Hardware Group, Inc.

MICROSHIELD® COATING

- Revolutionary finish coating available on all SARGENT product lines, utilizes a silverbased antimicrobial compound from Agion Technologies
- As an integral part of the finish coating, MicroShield lasts for the life of the hardware
- MicroShield coating permanently suppresses the growth of bacteria, algae, fungus, mold and mildew. It is effective against a broad spectrum of bacteria.
- Non-toxic and completely safe. The Agion antimicrobial compound is EPA and NSF approved and FDA listed for use in medical and food preparation equipment.
- Applications: Anywhere there is need for a clean environment (hospitals, laboratories, schools, medical centers, daycare, food processing etc.)

agion The Agion antimicrobial is not intended as a substitute for good hygiene. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY makes no representations or warranties, express or implied, as to the efficacy of the Agion antimicrobial. A copy of the Agion warranty is available upon request. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA, USA.



This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.


On The Cover

Overview



A key-in-lever lock designed for standard duty commercial exterior and interior doors in offices, commercial interiors, medical clinics, government facilities and public buildings. Exceeds ANSI/BHMA A156.2 Standards for cycling and durability.

"Best Overall Lock in the Grade 2 Class"

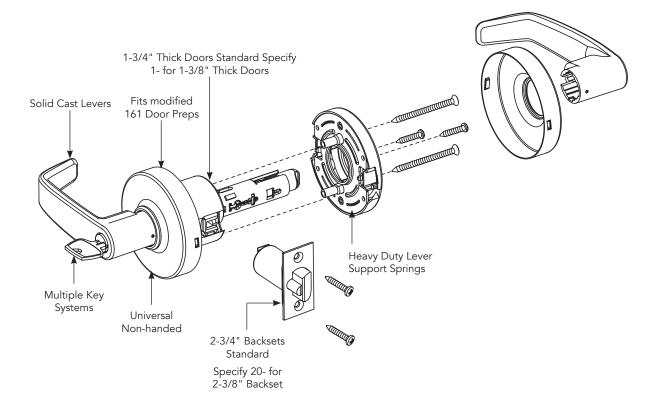

Applications

- Standard duty commercial interior & exterior doors
- Offices
- Commercial interiors
- Medical clinics
- Government facilities
- Public buildings

08/25

Certifications



CERTIFICATION/COMPLIANCE

| ANSI/BHMA | Certified ANSI/BHMA A156.2 (2017) Series 4000 — Grade 2 Certified ANSI/BHMA A156.41 |
|--|---|
| UL/cUL | UL/cUL listed to US and Canadian safety standards for 3 hour doors up to 4' x 10' (double doors require 41- option) |
| NFPA 80 | Conforms for life safety and property protection, Standard for Fire Doors and Other Opening Protectives |
| Positive Pressure | Meets ANSI/UL 10C, Positive Pressure Fire Test of Door Assemblies |
| ADA | All levers conform to ADA clear opening width requirements of ANSI A117.1 |
| California State Reference Code (Formerly Title 19, California State Fire Marshal Standard) | All levers with returns comply; levers return to within 1/2" (13mm) of door face |
| Windstorm/Hurricane | All individual components of a total door opening are required to comply with each code. |

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

WINDSTORM CERTIFICATIONS: FLORIDA BUILDING CODES & UL LISTINGS

SARGENT Manufacturing's products meet building codes that require hurricane and windstorm certifications, including some of the most stringent building codes as specified in the Florida Building Code, Miami Dade Code and the International Building Code. Listed below are certifications and standards met by the 7 Line lock.

FLORIDA BUILDING CODE: FL2998

UL CERTIFICATION DIRECTORY: ZHEM.R21744 - LATCHING HARDWARE

| ANSI/SDI A250.13 (2014) | "Testing and Rating of Severe Windstorm Resistant Components for Swinging Door Assemblies" |
|-------------------------|--|
| ASTM E330 (2002) | "Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference"* |
| ASTM E1886 (2005) | "Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials"* |
| ASTM E1996 (2009) | "Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors and Impact Protective Systems Impacted by Windborne Debris in Hurricanes"* |
| (TAS) 201 (1994) | "Impact Test Procedures"* |
| (TAS) 202 (1994) | "Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference"* |
| (TAS) 203 (1994) | "Criteria for Testing Products Subject to Cyclic Wind Pressure Loading"* |

^{*} Published in the 7th Edition (2020), "Florida Building Code" (FBC), State Product Approval Number FL2998



| Door Prep | ANSI/SDI A250.14 |
|---------------------|--|
| Door Thickness | 1-3/4" (44mm) Thick Door standard Specify 1- for 1-3/8" (35mm) Thick Door |
| Backset | 2-3/4" (70mm) Backset standard. Specify 20- for 2-3/8" (60mm) Backset |
| Cylindrical Housing | Steel, zinc dichromate finish |
| Front | Wrought brass or stainless steel; Standard — 2-1/4" (57mm) x 1-1/8" (29mm), with 2-3/4" (70mm) backset Specify 20- for 2-1/4" (57mm) x 1" (25mm), with 2-3/8" (60mm) backset |
| Strike | Wrought brass or stainless steel 800 curved lip strike - (specify 29- Option) 808 curved lip ANSI strike (standard) 505 full lip strike (specify 14- Option) |
| Hand | Non-handed — B, L, P, MD, ND lever designs Handed — G and Y Coastal Series lever designs |
| Latch | Brass 1/2" (13mm) throw |
| Keys | Two nickel silver change keys per lock standard |
| Cylinder | Brass, 6-pin LA keyway, 1-bitted standard, specify KD for keyed different/random |
| Finishes | See page 13 |
| Warranty | Five-year limited |

STRENGTH AND DURABILITY

- Cycle Test: Exceeds ANSI/BHMA A156.2 Grade 2 cycle requirements
- 5 Year limited warranty. No service required

CONVENIENCE

- Installs in 1 minute or less
- Non-handed design for ease of installation and efficient warehousing — with standard lever designs (Except G&Y)
- User friendly packaging
- User friendly instruction
- Convenient installation diagram on box

DESIGN

- Solid feel and precise lever action
- Multiple decorative designs available including Coastal Series and Studio Collection options
- Levers are solid, one-piece cast construction

FLEXIBILITY

- Fits modified 161 door preps. Internal through-bolts supply strength and stability without requiring additional door preparation
- 14 architectural grade finishes
- 10 standard functions
- SARGENT uses engineered solutions and flexible manufacturing processes to accommodate special applications

SECURITY


- Torx® and spanner screws optional
- Security key systems available (Degree®, Signature, XC, Keso, and Keso F1)
- Vandal resistant trim optional (FW- option)

08/25

Lever & Rose Designs



STANDARD LEVERS - SOLID CAST ZINC







MD



STUDIO COLLECTION - SOLID CAST ZINC




















COASTAL SERIES™ LEVERS - SOLID CAST ZINC


G Handed






HANDED





ROSE - WROUGHT BRASS OR BRONZE





All lever height measurements represent total distance from door face.

*Lever with return to within 1/2" of door face.

Functions



SINGLE CYLINDER FUNCTIONS

| Inside/Outside | Series/ Function | Туре | ANSI No. | Function Description |
|----------------|---------------------|------------------------|----------|--|
| | 7G04* | Storeroom or Closet | F86 | DEADLOCKING LATCH LATCH BY LEVER INSIDE OR KEY OUTSIDE Outside lever rigid at all times |
| | 7G05* | ENTRANCE OR OFFICE | F109 | Deadlocking latch Latch by either lever unless outside lever is locked by push/turn button in inside lever Push button released by key outside or lever inside Turn button must be released manually Key retracts latch when outside lever is locked |
| | 7G37* | CLASSROOM | F84 | Deadlocking latch Latch by either lever unless outside lever is locked by key Key in outside lever locks or unlocks outside lever and retracts latch Inside lever always operative |

NON-CYLINDER FUNCTIONS

| Inside/Outside | Series/ Function | Туре | ANSI No. | Function Description |
|----------------|---------------------|--------------------------|----------|--|
| | 7U15 | Passage | F75 | Latch by either lever |
| | 7G15-3 | Exit or Communicating | _ | DEADLOCKING LATCH BLANK ROSE OUTSIDE LATCH BY LEVER INSIDE MINIMUM CLEARANCE OF 2" REQUIRED BETWEEN DOORS |
| | 7U65* | PRIVACY/ BATHROOM | F76 | Latch by either lever unless outside lever is locked by push button in inside lever Turning inside lever or closing door releases button Emergency button in outside lever unlocks, with use of a blade screw driver in outside lever and releases inside button |
| | 7U68* | Hospital Privacy | _ | LATCH BY EITHER LEVER UNLESS OUTSIDE LEVER IS LOCKED BY PUSH BUTTON IN INSIDE LEVER Turning inside lever or closing door releases button Rotating thumbturn in outside lever unlocks the outside lever and releases the inside button |
| | 7U93 | SINGLE LEVER PULL | _ | For wood or custom hollow metal doors Lever and rose attached by two through-bolts and two surface applied screws Requires special door preparation — see template |
| | 7U94 | DOUBLE LEVER PULL | _ | For wood or custom hollow metal doors Lever and rose both sides by two through-bolts and four surface applied screws Requires special door preparation — see template |
| | 7U94-2 | DOUBLE LEVER PULL | _ | Lever and rose attached by two through-bolts and four surface applied screws Dummy latch plate Requires special door preparation — see template |

*FREEWHEELING LOCKED LEVER OPTION (FW)

- \bullet Available the following functions 04, 05, 37, 65 & 68
- Provides protection from vandalism and added security
- Stops in rose prevent the lever from traveling beyond 60° in either direction

Note: Shaded lever indicates it is rigid at all times

08/25

Cylinders



CYLINDERS

Cylinders are supplied 1-bitted unless specified keyed random or master keyed. For master keyed orders provide keying details as requested on SARGENT Keyed Order Lead Sheets, located in the price book or contact customer service.

| | | | | Interchang | eable Core^ |
|-------------------------|------|----------------------|----------------|--------------|--------------|
| Туре | Pins | Standard Cylinder | Hotel Cylinder | Large Format | Small Format |
| Campatianal | 6 | C10-1 | C10-2 | 6300 | 7300B |
| Conventional | 7 | N/A | N/A | N/A | 7P-7300B |
| Signature | 6 | 10-C10-1 | N/A | 10-6300 | N/A |
| VC | 6 | 11-C10-1 | N/A | 11-6300 | N/A |
| XC | 7 | N/A | N/A | N/A | 11-7P-7300B |
| Keso | 12 | F1-81-C10-1 | N/A | N/A | N/A |
| Degree [®] DG1 | 6 | DG1-C10-1 | DG1-C10-2 | DG1-6300 | N/A |
| Degree [®] DG2 | 6 | DG2-C10-1 | N/A | DG2-6300 | N/A |
| Degree [®] DG3 | 6 | DG3-C10-1 | N/A | DG3-6300 | N/A |



- Finishes: 04, 15 or BSP.
- To order cylinder separately, specify Model No. x Keyway x Finish (e.g., C10-1 x LA x 15)

^Locks will be provided with the applicable tailpiece per the type interchangeable and/or removable core being used. For example standard cores and Degree® cores require different tailpieces. When ordering complete locks, the appropriate option code must be specified in accordance to the permanent core being used. See pages 11-12 for cylinder options.





6300



7P-7300B

Cylinders with Competitive Keyways

| Competitive Keyway | Part Number |
|--------------------|-------------|
| Schlage® C | SC-C10-1 |
| Schlage® E | SE-C10-1 |

- Cylinders are brass and come with 2 nickel silver key blanks
- Finishes: 04 or 15
- Tailpiece included

Refer to Cylinders and Components catalog for more information.

Interchangeable Core Tailpieces (replacement parts)

| Used with: | Туре | P/N |
|---------------------|-------------------------------------|---------|
| 6300 10-6300 | LFIC Conventional LFIC Signature | 10-0239 |
| 11-6300 DGX-6300 | LFIC XC LFIC Degree® | 10-3429 |
| 7300B | SFIC 6Pin | 10-0239 |
| 7P-7300B | SFIC 7 Pin | 10-0240 |
| 11-7P-7300B | SFIC XC | 10-3138 |

Note: Tailpieces included with lock.

Levers That Accept Cylinders/Cores from Other Manufacturers*

| Cylinder Type | Option Code Ordered with Lock | Available Levers | Tailpiece P/N (provided with lock) | Competitor Cylinder Compatibility | |
|---------------------|----------------------------------|---------------------|--|---|--|
| Fixed Core | | | | | |
| Schlage® 6-pin | 30- | All | N/A | Schlage® Conventional or Primus® | |
| Interchangeable Cor | re | | | | |
| CEIC / 7 | 70 70 70 | A 11 | 10-0239 (6-pin) | All Z : III | |
| SFIC 6- or 7-pin | /U-, /Z-, /3- | 70-, 72-, 73- All | 10-0240 (7-pin) | All 6- or 7-pin small format interchangeable cores | |
| Schlage® LFIC 6-pin | SF- | L | 10-3428 | All Schlage® 6-pin large format interchangeable cores | |

^{*}Cylinder/core not included.




LATCHES

• Finishes: 03, 04, 09, 10, 10B, 10BE, 10BL, 20D, 32D, BSP, WSP

Plain/Unguarded Latch - 7U15, 7U65, 7U68:


| Part No. | Front | Front Width | Backset | Throw |
|----------|---------------|---------------|---------------|-------------|
| 07-2433 | Square Corner | 1" (25mm) | 2-3/8" (60mm) | 1/2" (13mm) |
| 07-2432 | Square Corner | 1-1/8" (29mm) | 2-3/4" (70mm) | 1/2" (13mm) |



Plain/Unguarded

Deadlocking/Guarded Latch - All Other Functions:

| Part No. | Front | Front Width | Backset | Throw |
|----------|---------------|---------------|---------------|-------------|
| 07-2431 | Square Corner | 1" (25mm) | 2-3/8" (60mm) | 1/2" (13mm) |
| 07-2430 | Square Corner | 1-1/8" (29mm) | 2-3/4" (70mm) | 1/2" (13mm) |



Deadlocking/Guarded

When ordering latches separately, specify Part No. x Finish (e.g., 07-2340 x 26D)

08/25


Strikes



STRIKES

• Finishes: 03, 04, 09, 10, 10B, 10BE, 10BL, 20D, 32, 32D, BSP, WSP


4-7/8" CURVED LIP STRIKE: STANDARD*

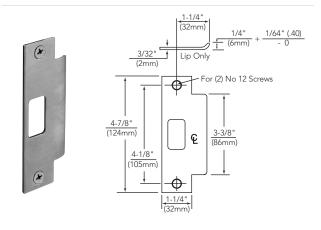

- Brass, bronze or stainless steel
- Conforms to ANSI standard
- Furnished standard with curved lip 1-1/4" (32mm) from center of strike screw holes to end of lip
- Lip lengths: 7/8" (22mm), 1-1/8" (29mm), 1-1/4" (32mm), 1-3/8" (35mm), 1-5/8" (42mm), 1-7/8" (48mm), 2-1/8" (54mm), 2-3/8" (60mm), 2-5/8" (66mm), 2-7/8" (73mm) and 3" (76mm)
- 77-1141 Wrought strike box available separately
- To order strike separately, specify 808 strike x finish x lip length


*This strike provided standard with all locks effective May 15, 2025. Option 28- no longer required. If 2-3/4" curved lip strike needed, specify 29- option.

2-3/4" CURVED LIP STRIKE (29- OPTION)

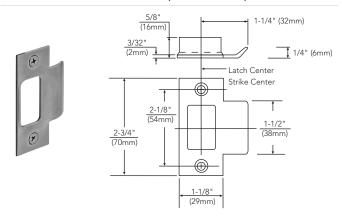


- Brass, bronze or stainless steel
- Furnished standard with 1-1/4" (32mm) curved lip from center of strike screw holes to end of lip
- Lip lengths 1" (25mm), 1-1/4" (32mm) standard, 1-1/2" (38mm), 1-3/4" (44mm) and 2" (51mm)
- Plastic strike box AM-0044 included
- To order strike separately, specify 800 strike x finish x lip length

2-1/4" FULL LIP STRIKE (14- OPTION)



- Furnished standard with curved lip 1-1/4" (32mm) from center of strike screw holes to end of lip
- No other lip lengths available
- To order strike separately, specify: 505 strike x finish

ANSI WROUGHT STRIKE BOX



- Used with ANSI 4-7/8" strike (#808)
- To order with lock, specify option WBS
- To order separately, specify 77-1141

Mechanical & Cylinder Options



MECHANICAL OPTIONS:

| Thin Doors | 1- | Mounting kit for 1-3/8" thick doors (2-3/4" backset latch with 1-1/8" front provided unless 20- option for 2-3/8" backset also specified) | | | | | |
|--------------------|---|---|--|--|--|--|--|
| Backset Options | 20- | 2-3/8" Backset Latch with 1" Front, includes shim kits to fit 1-3/8" door | | | | | |
| Strike | 14- | 505 Full Lip Strike | | | | | |
| | 29- | Strike #800. Lip length 1-1/4". Lip lengths 1" to 2" in 1/4" increments only. | | | | | |
| Security Fasteners | 36- | Six lobe security head screws | | | | | |
| | 37- | Spanner head screws | | | | | |
| Lead lined | 74- Lead lined (specify components for inside, outside and/or latch tube) | | | | | | |
| | 75- | Tactile Warning — Handicap warning milled on backside of inside lever (L, B, P levers only) | | | | | |
| | 76- | Tactile Warning — Handicap warning milled on backside of outside lever (L, B, P levers only) | | | | | |
| Tactile Warning | 77- | Tactile Warning — Handicap warning milled on backside of both levers (L, B, P levers only) | | | | | |
| Options | 85- | Tactile Warning — Abrasive coating on inside lever | | | | | |
| | 86- | Tactile Warning — Abrasive coating on outside lever | | | | | |
| | 87- | Tactile Warning — Abrasive coating on both levers | | | | | |
| Freewheeling Trim | wheeling Trim FW- Freewheeling locking levers (See page 6 for details) | | | | | | |
| Finish Protection | SG- | MicroShield® antimicrobial clear powder coat (only available with 26D finish) | | | | | |
| | CPC- | Clear Powder Coat over 26D – 7G05 x LL x 26D x CPC. | | | | | |
| Box Strike | WBS- | Wrought Box Strike | | | | | |

CYLINDER OPTIONS:

| Conventional Cylinder | - | SARGENT Conventional Cylinders supplied Standard (nomenclature not required) | | | | |
|--|---|---|--|--|--|--|
| | DG1- | SARGENT Degree Key System Level 1 (bump resistant with patented keys) | | | | |
| | DG1-21- | Degree Level 1 Construction Master Keying | | | | |
| | DG1-60- | Degree Level 1 Removable Disposable Construction Core | | | | |
| | DG1-63- | Degree Level 1 Removable Core | | | | |
| | DG1-64- | Degree Level 1 Removable Construction Keyed LFIC | | | | |
| | DG1-65- | Degree Level 1 Unassembled/Uncombined Fixed Core Component Cylinder (packed loose for field keying | | | | |
| | DG1-63-65 | Degree Level 1 Unassembled/Uncombinated Removable Core LFIC (packed loose for field keying) | | | | |
| | DG2- | SARGENT Degree Key System Level 2 (geographically exclusive; bump and pick resistant) | | | | |
| | DG2-21- | Degree Level 2 Construction Master Keying | | | | |
| Degree Key System | DG2-60- | Degree Level 2 Removable Disposable Construction Core | | | | |
| | DG2-63- | Degree Level 2 Removable Core | | | | |
| | DG2-64- | Degree Level 2 Removable Construction Keyed LFIC | | | | |
| | DG2-65- | Degree Level 2 Unassembled/Uncombined Fixed Core Component Cylinder (packed loose for field keying) | | | | |
| | DG2-63-65 | Degree Level 2 Unassembled/Uncombinated Removable Core LFIC (packed loose for field keying) | | | | |
| | DG3- | SARGENT Degree Key System Level 3 (geographically exclusive; UL437 certified; bump and pick resistant) | | | | |
| | DG3-21- | Degree Level 3 Construction Master Keying | | | | |
| | DG3-60- | Degree Level 3 Removable Disposable Construction Core | | | | |
| | DG3-63- | Degree Level 3 Removable Core | | | | |
| | DG3-64- | Degree Level 3 Removable Construction Keyed LFIC | | | | |
| Ciamatuma Kau Cuatama | 10- | SARGENT Signature Key System | | | | |
| Signature Key System | 10-21- | SARGENT Signature Construction Key System (Lost Ball) | | | | |
| Signature: Large Format Interchangeable Core (Removable Core) | 10-63- SARGENT Signature LFIC (Removable Core) Cylinder | | | | | |
| VC Var Creaters | 11- | XC- Key System (not available with other Key Systems, unless specified) | | | | |
| XC- Key System | 11-21- | XC- Construction Key System (Lost Ball) | | | | |
| XC- Large Format Interchangeable Core (Removable Core) | 11-60- | Hardware to accept XC- Permanent LFIC (Removable Core), Disposable plastic Core- provided | | | | |
| | 11-63- | Hardware provided with XC- LFIC (Removable Core) Cylinder - (includes masterkeying, grand masterkeying) | | | | |
| | 11-64- | Hardware provided with Keyed construction core to accept XC- LFIC (removable) Permanent Core (ordered separately) | | | | |
| | 11-70-7P- | Lock to accept XC- SFIC (7-Pin) XC- Permanent Cores, plastic disposable core provided | | | | |
| XC- Small Format | 11-72-7P- | Lock to accept XC- SFIC (7-Pin Keyed Construction Core provided) cylinder Permanent Core ordered separately | | | | |
| Interchangeable Cores | 11-73-7P- | Lock supplied with XC- Small Format 7-Pin interchangeable core (includes masterkeying, grand masterkeying) | | | | |
| Cores | 11-65-73- 7P- | Lock provided to accept XC- Uncombinated 7-Pin SFIC (permanent) Core - (packed loose) | | | | |

Note: Cylinder Options continued on the following page

08/25

Mechanical & Cylinder Options



CYLINDER OPTIONS:

| Construction Key Systems | 21- | SARGENT Lost Ball Construction Keying for Conventional, XC and Signature Series (N/A with 63- or 73-) | | | | | |
|---|---|---|--|--|--|--|--|
| Large Format | 60- | Hardware to accept SARGENT Permanent LFIC (Removable Core), Disposable plastic Core provided (Permanent Cores Ordered Separately) | | | | | |
| Interchangeable Core | 63- | Hardware provided with LFIC (Removable Core) Cylinder - (includes masterkeying, grand masterkeying) | | | | | |
| (Removable Core) | 64- | Hardware provided with Keyed construction core to accept LFIC (Removable) Permanent Core (ordered Separately) | | | | | |
| | 70- | Lock to accept 6- or 7-Pin SFIC Permanent Cores, plastic disposable core provided | | | | | |
| | 72- | Lock to accept 6- or 7-Pin SFIC (Keyed Construction Core provided) Cylinder (Permanent Core ordered separately) | | | | | |
| Small Format Interchangeable | 73- | Lock supplied with 6-Pin SFIC (Includes masterkeying, grand masterkeying) | | | | | |
| Cores | 65-73- | Lock provided to accept Uncombinated 6-Pin SFIC (Permanent) Core - (packed loose for field keying) | | | | | |
| | 65-73-7P- | Lock provided to accept Uncombinated 7-Pin SFIC (Permanent) Core - (packed loose for field keying) | | | | | |
| | 73-7P- | Lock supplied with Small Format 7-Pin Interchangeable Core (includes masterkeying, grand masterkeying) | | | | | |
| | 80- | Lock to accept Keso and Keso F1 cylinders - no cylinders provided (not available for MD or ND levers) | | | | | |
| Keso & Keso F1 | 82- | Lock provided with SARGENT Keso Security Cylinder (not available for MD or ND levers) | | | | | |
| | F1-82- | Lock provided with SARGENT Keso F1 Security Cylinder (not available for MD or ND levers) | | | | | |
| Bump Resistant BR- Bump Resistant Cylinder (available with Conventional & Conventional XC Cylin | | Bump Resistant Cylinder (available with Conventional & Conventional XC Cylinders only) | | | | | |
| Keyed Different | Keyed Different KD- Cylinders provided keyed differently/random | | | | | | |
| Less Cylinder | LC- | Lock supplied less Cylinder | | | | | |
| Schlage | SC- | Schlage C keyway cylinder, 0 bitted | | | | | |
| Keyways | SE- | Schlage E keyway cylinder, 0 bitted | | | | | |
| Accepts Schlage | 30- | Lever to accept Schlage Cylinder-Cylinder is not provided | | | | | |
| Cylinders | SF- | L Lever to accept Schlage Large Format Interchangeable Core (supplied less core, tailpiece included) | | | | | |

Note: To order the 7 Line lock for use with ASSA V-10 (VA & VS) cylinders, specify the Less Cylinder (LC-) option. V-10 cylinders are available from ASSA, Inc. @ 800-235-7482

Finishes, Packaging



| Finish | Descriptions | ANSI/BHMA | | |
|-------------|---|-----------|--|--|
| 03 | Polished brass, clear coated | 605 | | |
| 04 | Satin brass, clear coated | 606 | | |
| 09 | Polished bronze, clear coated | 611 | | |
| 10 | Satin bronze, clear coated | 612 | | |
| 10B | Oxidized bronze, oil rubbed | 613 | | |
| 10BE | Dark oxidized satin bronze — equivalent | 613E | | |
| 10BL | Oxidized satin, bronze, clear coated | 614 | | |
| 14 | Polished nickel, clear coated | 618 | | |
| 15 | Satin nickel, clear coated | 619 | | |
| 20D | Statuary dark bronze, clear coated | 624 | | |
| 26 | Polished chrome | 625 | | |
| 26D | Satin chrome | 626 | | |
| BSP | Black Suede Powder Coat | _ | | |
| WSP | White Suede Powder Coat | | | |
| SG- Option | MicroShield® antimicrobial clear powder coat (only available with 26D finish) | | | |
| CPC- Option | Clear Powder Coat over 26D – 7G05 x LL x 26D x CPC | | | |

Zinc levers are plated to match ANSI/BHMA finish. Custom colors available, consult factory.

Split finishes:

- Specify outside finish first i.e. 7G05 x LL x 26D x 03 x RH
- Handing must be specified
- Strike and latch front will match the following: RH & LH = inside finish RHR & LHR = outside finish

 Lock Finish
 Cylinder/Core*

 03, 04, 09, 10, 10B, 10BE, 10BL, 20D
 04

 14, 15, 26, 26D, WSP
 15

 BSP
 BSP

Packaging

| 7G04 x LL |
|-------------------|
| 4.3 lbs (1.95 kg) |
| 1 box |
| 41 lbs (18.6 kg) |
| 10 boxes/case |

08/25

^{*}Finish when cylinder provided with lock. 15 finish provided for cylinders/cores where BSP not available, see cylinder page 8 for finish availability.


How to Order, Miscellaneous Parts



| 10 | 10-29- | 7G05 | L | Υ | RH | 15 | AA1 |
|----------|--|--------------------------------|--------------------------------------|---|------------------------|--------------------------------|---|
| Quantity | Options* | Lock & Function | Rose | Lever | Hand | Finish | Additional Information |
| | Available Options Pg 11-12 (Note: 808 ANSI strike standard, 29- for T-Strike) | Available Functions Pg 7 | Only Available with the L Rose | Available Levers B, Y, L, P, G, MD & ND | RH, LH, RHR, LHR | Available Finishes Pg 13 | Such as Item, Heading Number, Door Number, Keyset |

^{*} Multiple Options may be selected

HOW TO SPECIFY HANDING

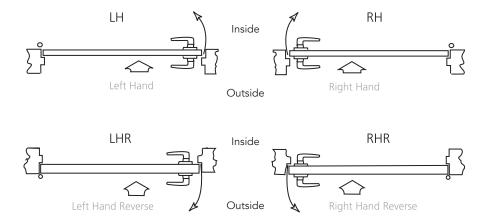

MISCELLANEOUS PARTS

| Part No. | Description | | | |
|----------|--|--|--|--|
| 07-2648 | 1-3/8" Door Mounting Kit (1- & 20- Options) | | | |
| 01-0949 | 30-option, washer only | | | |
| C10-3 | Emergency release cylinder (65 function) | | | |
| 10-0043 | Push pin tool | | | |
| 10-2052 | Screw pack (29- option) | | | |
| 10-2070 | Screw pack (standard ANSI) | | | |
| 82-3855 | 6 Lobe Torx® Bit Pack (36-) (sizes- T8, T9, T10, T15, T20, T25, T27) 7/16" Driver | | | |
| 82-3856 | Spanner Bit Pack (37-) (sizes- 4, 6, 8, 10, 12, 1/4") 1/4" Driver | | | |

Architectural Specifications



SUGGESTED ARCHITECTURAL SPECIFICATIONS - 2.0 BORED LOCKS

- A. Locks shall be 7 Line as manufactured by SARGENT Manufacturing Company, New Haven, CT.
- B. Locks must be certified ANSI/BHMA A156.2 Series 4000, Grade 2
 and shall meet or exceed the cycle requirements of ANSI/BHMA A156.2 Series 4000, Grade 2 with all standard trims.
- C. Locks shall be non-handed with bi-directional lever operation, except the "G" and "Y" lever designs.
- D. Lock levers shall be made of solid material.
- E. Lock shall be available in a minimum of seven lever designs.
- F. Locks shall comply with UL10C positive pressure requirements.
- G. Locks required for fire doors shall be listed by Underwriters Laboratories for ratings of 3 hour (A label) and less.
- H. Locks shall mount in a standard 161 door prep (2-1/8 inch dia.) without additional through-bolt preps.
- 1. Locks shall have a 2-3/4" (70mm) backset standard, with 2-3/8" (60mm) offered as an option.
- J. Strikes shall be non-handed with a curved lip. Provide wrought boxes with strikes.
- K. Locks shall have brass 6-Pin cylinder, standard.
- L. Provide two, nickel silver keys with each lock.
- M. Locks shall have a five year limited warranty.

08/25

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.



SARGENT Manufacturing Company 100 Sargent Drive New Haven, CT 06511 USA 800-727-5477 www.sargentlock.com

Founded in the early 1800s, SARGENT $^{\otimes}$ is a market leader in locksets, cylinders, door closers, exit devices, electromechanical products and access control systems for new construction, renovation, and replacement applications. The company's customer base includes commercial construction, institutional, and industrial markets.

Copyright © 2007-2025, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.