

PRODUCT CATALOG

Auxiliary Locks



Experience a safer
and more open world

Table of Contents

SSL1 Spring Latch For Security SideLight Applications 3

8200 Series Deadbolt Mortise Locks 4

4870 Series Mortise Deadbolts 5

480 Series Grade 1 Deadbolts. 6

460 Series Grade 2 Deadbolts. 7

Status Indicators. 8

Status Indicator Retrofit Kit 9

Padlocks 10

Cabinet Locks. 11

Cylinder Options 13-15

MICROSHIELD®

ASSA ABLOY Group companies offer MicroShield®, an anti-microbial coating for door hardware. MicroShield uses proven silver ion-based technology from Agion®, a leading provider of antimicrobial solutions, to stem the spread of bacteria and other microbes.

MicroShield® is a trademark of ASSA ABLOY Access and Egress Hardware Group, Inc.

MICROSHIELD® COATING

- Revolutionary finish coating available on all SARGENT product lines, utilizes a silver-based antimicrobial compound from Agion Technologies
- As an integral part of the finish coating, MicroShield lasts for the life of the hardware
- MicroShield coating permanently suppresses the growth of bacteria, algae, fungus, mold and mildew. It is effective against a broad spectrum of bacteria.
- Non-toxic and completely safe. The Agion antimicrobial compound is EPA and NSF approved and FDA listed for use in medical and food preparation equipment.
- Applications: Anywhere there is need for a clean environment (hospitals, laboratories, schools, medical centers, daycare, food processing etc.)



The Agion antimicrobial is not intended as a substitute for good hygiene. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY makes no representations or warranties, express or implied, as to the efficacy of the Agion antimicrobial. A copy of the Agion warranty is available upon request. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA, USA.

 **WARNING**

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

SSL1 Spring Latch

SARGENT SSL1 AUXILIARY LATCH

- SARGENT SSL1 is a spring loaded latchbolt retracted by a thumb turn on one side with no operation on the other side.
- The SSL1 Auxiliary Latch is the perfect solution for applications such as the Security Panel on the Security SideLight from CECO DOOR and CURRIES. Other applications include the top portion of a dutch door, communicating doors and shallow closets.
- Only recommended for areas with alternate exits
- ADA compliant thumb turn
- UL-cUL 3-hour fire rating
- 11 hardware finishes available



SECURITY SIDELIGHT SOLUTION

- The SSL1 spring-loaded latch used in conjunction with CECO DOOR and CURRIES Security SideLight doors and frames provide a full solution
- The Security Panel allows a free flow of light and an attached door panel can cover the SideLight window pane to provide privacy and to offer protection in emergency situations

Specifications

| | |
|--------------------------------|---|
| For Doors & Backset | 2-3/4" (70mm) backset |
| Strike | 2-3/4" (70mm) ANSI curved lip strike # 800 |
| Bolt | 1/2" (13mm) throw |
| Hand | Non Handed |
| UL Listed | UL Listed for use on fire doors, See Underwriters Laboratories Building Materials List |
| Finishes | 03, 04, 10, 10B, 10BE, 14, 15, 26, 26D, BSP, WSP |
| Door Prep | Single sided prep |

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

How To Order

| | |
|-------------|------------|
| SSL1 | 26D |
| Product | Finish |



Security SideLight offered through CECO DOOR and CURRIES


8200 Series Deadbolts

Specifications

| | |
|----------------------------|---|
| For Doors | Door thickness 1-3/4" (44mm) standard (For thicker doors, consult factory) |
| Backset | 2-3/4" only |
| Strike | 4-7/8" (124mm), ANSI Standard Available finishes 03, 04, 09, 10, 10BE, 10BL, 15, 20D, 32, 32D, BSP, WSP |
| Deadbolt | One piece hardened stainless steel deadbolt with 1" (25mm) throw |
| Cylinder | Brass, 6 pin. 2 keys per lock. Also available with the SARGENT Signature and Keso and Keso F1 security systems NOTE: See 8200 Mortise Lock catalog for details on cylinder requirements. |
| Masterkeying | Can be masterkeyed. Construction key systems available |
| Case | 12 gauge heavy duty wrought steel, zinc dichromate plated |
| Outside Front Plate | Brass, bronze and stainless steel. 8" (203mm) x 1-1/4" (32mm), ANSI Standard A156.115. Adjustable at any angle from flat to beveled 1/8" (3mm) in 2" (51mm) |
| Hand | Non-handed |
| Mechanical Options | Cylinder Options see page 13-14 1- For 1-3/8" thick doors; front 1-1/16" wide 23- 4-7/8" (124mm) ANSI Strike with 1-1/8" (29mm) Flat Lip 31- 2-1/4"- 2-1/2" thick doors, centered in door prep, no paneling. Consult factory for other door thicknesses available by special application. 36- 6 Lobe Torx® Security Screws 37- Spanner head security screws 74- Lock case wrapped in lead (specify hand) SG- MicroShield® antimicrobial clear powder coat (only available with 32D) WBS- Wrought Box Strike |
| Finishes | 03, 04, 09, 10, 10B, 10BE, 10BL, 15, 20D, 26, 26D, 32, 32D, BSP, WSP |




8200 Deadlock




How To Order

| 10-28- | 8230 | 26D |
|------------------------------|-------------------|--|
| Options | Series x Function | Finish |
| Mechanical Options this page | 8203 | 03, 04, 09, 10, 10B, 10BE, 10BL, 15, 20D, 26, 26D, 32, 32D, BSP, WSP |
| Cylinder Options page 13-14 | 8221 | |
| | 8222 | |
| | 8223 | |


7730 Strike (Standard)



82-0229 Strike Flat Lip Alternative (23- Option)



82-0109 Strike Curved Lip Alternative (Specify as 82-0109)



Functions

| 03 Classroom | 20 Deadlock | 21 Deadlock | 22 Deadlock | 23 Classroom |
|---|---|---|---|--|
| | *** | | *** | |
| <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside retracts deadbolt, but will not project it | <ul style="list-style-type: none"> Key outside operates deadbolt No inside operation ANSI F18 | <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside operates deadbolt ANSI F17 | <ul style="list-style-type: none"> Key from either side operates deadbolt ANSI F16 | <ul style="list-style-type: none"> Key from either side operates deadbolt Thumb turn inside will retract deadbolt, but will not project it |

*** For use only on rooms with more than one exit

NOTE: For deadbolt function locks with levers see the 8200 Mortise Lock Catalog

Copyright © 2007-2026, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent: www.assaabloyds.com/patents.


4870 Series Deadbolts

Specifications

| | |
|---------------------------|---|
| For Doors | Door thickness 1-3/4" (44mm) standard (For thicker doors, consult factory) |
| Backset | 2-3/4" (70mm) only |
| Strike | # 480 Strike Standard: 3-1/2" (89mm) x 1-1/8" (29mm); For Strike Box, specify WBS when ordering |
| Bolt | Laminated Stacked Steel Deadbolt with Hardened Pin and a 1" throw |
| Cylinder | Brass 6 pin. Two nickel silver keys per lock (Control key must be ordered separately, when required) |
| Cylinder Ring | 97 Rosette (standard with #41 Cylinder), 1KB rosette optional (specify on order) NOTE: See 8200 Mortise Lock catalog for details on cylinder collar kit. |
| Case | Heavy wrought steel, .093 thick, protected with a zinc dichromate finish |
| Outside | Brass, bronze, stainless steel. 4-5/8" (117mm) x 1-1/8" (29mm) Front Plate Adjustable for flat or beveled doors (bevel adjustment 1/8" (3mm) in 2" (51mm)) |
| Hand | Non handed, field reversible (except for 74-) |
| Thumb Turn | 130W ADA Thumb turn (standard); optional larger thumb turn (specify LB-) |
| UL/cUL Listed | 4870 series deadlocks, when used in conjunction with the primary latching device, are UL/cUL listed for use on fire doors having a rating up to and including 3 hours. In addition, the 4870 series are cUL listed for use on wood doors having a rating up to and including 90 minutes. |
| Mechanical Options | Cylinder Options see pages 13-14 28- 7710 Flat Lip ANSI Strike 4-7/8" (124mm) x 1-1/4" (32mm) 36- Torx® security screws 37- Spanner head security screws 74- Lock case wrapped in lead (specify hand) LB- Larger size ADA thumbturn SG- MicroShield® antimicrobial clear powder coat (only available with 32D) WBS- Wrought Box Strike |
| Finishes | 03, 04, 09, 10, 10B, 10BE, 10BL, 14, 15, 20D, 26, 26D, 32, 32D, BSP, WSP |



4870 Series Deadlock




Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.


How To Order

| 10-28- | 4874 | 26D |
|------------------------------|-------------------|--|
| Options | Series x Function | Finish |
| Mechanical Options this page | 4874 | 03, 04, 09, 10, 10B, 10BE, 10BL, 14, 15, 20D, 26, 26D, 32, 32D, BSP, WSP |
| | 4875 | |
| | 4876 | |
| Cylinder Options page 13-14 | 4877 | |
| | 4878 | |
| | 4879 | |


480 Strike (Standard)



7710 Strike (28- Option)



7730 Strike (Ordered separately)




Functions

| 4874 Double Cylinder | 4875 Single Cylinder x Thumb Turn | 4876 Single Cylinder | 4877 Classroom x Thumb Turn | 4878 Public Toilet | 4879 Exit Lock |
|--|--|--|---|--|---|
| *** | | *** | | | |
| <ul style="list-style-type: none"> Key from either side operates deadbolt ANSI E06061 | <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside operates deadbolt ANSI E06071 | <ul style="list-style-type: none"> Key outside operates deadbolt No inside operation ANSI E06081 | <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside retracts deadbolt, but will not project it ANSI E06091 | <ul style="list-style-type: none"> Key from either side operates deadbolt Thumb turn inside retracts deadbolt, but will not project it | <ul style="list-style-type: none"> Thumb turn inside operates deadbolt No outside operation |

*** For use only on rooms with more than one exit

480 Series Grade 1 Deadbolts

Specifications

| | |
|---------------------------|--|
| For Doors | 1-3/8" (35mm) to 1-3/4" (44mm) thick standard For doors over 1-3/4" (44mm) consult factory (2-1/4" Thick door max) |
| Door Prep | Fits 161 (standard) cut outs and Fits 160 with 2-3/8" (60mm) backset with 1" (25mm) front and for 1-3/8" (35mm) thick door |
| Backsets | 2-3/4" (70mm) standard. 2-3/8" (60mm) optional (20- option) |
| Strike | Wrought brass, bronze or stainless steel |
| Bolt | Solid steel with hardened steel pin insert and nickel silver plating 7/8" (22mm) x 5/8" (16mm) x 1" (25mm) throw |
| Cylinder | Brass, 6 pin. 2 nickel silver keys |
| Masterkeying | Can be masterkeyed. Construction key system available |
| Front | Wrought brass, bronze or stainless steel 2-1/4" (57mm) x 1-1/8" (29mm) with fixed bevel 1/8" (3mm) in 2" (51mm) furnished standard |
| Hand | Non handed, field reversible |
| Thumb Turn | Non-ferrous |
| Housing | Non-ferrous, reinforced, one piece 2-1/2" (64mm) diameter LFIC options: housing brass & zinc, two piece Concealed screws on double cylinder function |
| ANSI/BHMA | A156.36 Certified Grade 1  |
| UL/cUL Listed | 480 series deadbolts, when used in conjunction with the primary latching device, are UL/cUL listed for use with Classified steel covered composite or hollow metal doors rated up to and including 3 hours; wood and plastic covered composite doors rated up to and including 1-1/2 hours; and wood core doors rated for 20 minutes. |
| Positive Pressure | Meets ANSI/UL 10C, Positive Pressure Fire Test of Door Assemblies |
| Mechanical Options | Cylinder Options see page 13-14 16- 400 "T" shaped strike with strike box 20- 2-3/8" (60mm) backset. 2-3/4" (70mm) x 1" (25mm) wide front 28- 408 Flat lip strike ANSI A115.2 31- For 2-1/4" to 2-1/2" thick doors, centered in door prep, no paneling. 37- Spanner Head Screw 48- 488 Reinforced strike with 4 mounting screws and strike box |
| Finishes | 03, 04, 09, 10, 10B, 10BE, 14, 15, 26, 26D, BSP, WSP |






Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

How To Order

| 10-28- | 487 | 26D |
|---------------------------------|-------------------|--|
| Options | Series x Function | Finish |
| Mechanical Options this page | 484 | 03, 04, 09, 10, 10B, 10BE, 14, 15, 26, 26D, BSP, WSP |
| | 485 | |
| | 486 | |
| Cylinder Options Page 13-14 | 487 | |
| | 489 | |

Functions


* Note - Use only on rooms with more than one exit

| *484 Double Cylinder | 485 Single Cylinder | *486 Single Cylinder | 487 Classroom | 489 Exit |
|---|---|--|--|--|
|  |  |  |  |  |
| <ul style="list-style-type: none"> Key from either side operates deadbolt ANSI E0141 | <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside operates deadbolt ANSI E0151 | <ul style="list-style-type: none"> Key outside operates deadbolt Blank plate by exposed screws inside. Minimum 1" (25mm) required between doors ANSI E0161 | <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside retracts deadbolt, but will not project the deadbolt ANSI E0171 | <ul style="list-style-type: none"> Thumb turn inside operates deadbolt Blank outside plate ANSI E01111 |


480 Series Deadbolt




404 Strike
(Standard)




400 T-Shaped Strike
(16- Option)



488 Reinforced Strike
(48- Option)



408 Flat Lip Strike
(28- Option)




Packaging — 480 Series

| Approximate Shipping Weights | |
|------------------------------|---------------|
| 2 lbs. (.9 kg)/Box | 12 Boxes/Case |

460 Series Grade 2 Deadbolts

Specifications




| | |
|---------------------------|---|
| For Doors | 1-3/8" (35mm) to 1-3/4" (44mm) thick standard For doors over 1-3/4" (44mm) consult factory (2-1/4" Thick door max) |
| Door Prep | Fits 161 (standard) cut outs and Fits 160 with 2-3/8" (60mm) backset with 1" (25mm) front and for 1-3/8" (35mm) thick door |
| Backsets | 2-3/4" (70mm) standard. 2-3/8" (60mm) optional (20- option) |
| Strike | Wrought brass, bronze or stainless steel. Each unit includes a metal and wood frame strike with dust box |
| Bolt | Solid steel with hardened steel pin insert and nickel silver plating 7/8" (22mm) x 5/8" (16mm) x 1" (25mm) throw |
| Cylinder | Brass, 6 pin. 2 nickel silver keys |
| Masterkeying | Can be masterkeyed. Construction key system available |
| Front | Wrought brass, bronze or stainless steel 2-1/4" (57mm) x 1-1/8" (29mm) with fixed bevel 1/8" (3mm) in 2" (51mm) furnished standard |
| Hand | Non handed, field reversible |
| Thumb Turn | Non-ferrous |
| Housing | Non-ferrous, reinforced, one piece 2-1/2" (64mm) diameter Concealed screws on double cylinder function |
| ANSI/BHMA | A156.36 Certified Grade 2  |
| UL/cUL Listed | 460 series deadbolts, when used in conjunction with the primary latching device, are UL/cUL listed for use with Classified steel covered composite or hollow metal doors rated up to and including 3 hours; wood and plastic covered composite doors rated up to and including 1-1/2 hours; and wood core doors rated for 20 minutes. |
| Positive Pressure | Meets ANSI/UL 10C, Positive Pressure Fire Test of Door Assemblies |
| Mechanical Options | Status Indicator Options see page 8 Cylinder Options see page 13-14 20- 2-3/8" (60mm) backset. 2-3/4" (70mm) x 1" (25mm) wide front |
| Finishes | 03, 04, 10B, 10BE, 26, 26D, BSP |

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

How To Order

| 10-V01 | 465 | 26D |
|---------------------------------|-------------------|---------------------------------------|
| Options | Series x Function | Finish |
| Cylinder Options Pages 12-13 | 464 | 03, 04, 10B, 10BE, 26, 26D, BSP |
| | 465 | |
| Status Indicator Options Page 8 | 468 | |

Functions

| *464 Double Cylinder | 465 Single Cylinder | 468 Thumb Turn x Indicator |
|---|---|--|
|  |  |  |
| <ul style="list-style-type: none"> Key from either side operates deadbolt ANSI E0142 | <ul style="list-style-type: none"> Key outside operates deadbolt Thumb turn inside operates deadbolt ANSI E0152 | <ul style="list-style-type: none"> Thumb turn inside operates deadbolt Emergency override key outside Indicator standard both sides, specify indicator option code (V21 standard) ANSI E01112 |

*Use only on rooms with more than one exit

460 Series Deadbolt



Inside
Thumb Turn



Metal Frame Strike
Standard
2-3/4" (70mm) x 1-1/8" (29mm). To order separately, specify 404 x Finish



Wood Frame Strike
Standard
2-3/4" (70mm) x 1-1/8" (29mm). To order separately, specify 410 x Finish.



Dust Box
Standard. To order separately, specify part number 16-0277.

Packaging — 460 Series

| Approximate Shipping Weights | |
|------------------------------|---------------|
| 2 lbs. (.9 kg)/Box | 12 Boxes/Case |

Status Indicators

Status indicators can be used in a variety of applications and are most commonly used to identify occupancy status of a room.

- Restrooms
- Quiet rooms
- Nursing mother's rooms

Features:

- Multiple indicator windows
- Large indicator windows
- Color, wording and symbols
- Options for wording/color
- Oversized thumbturn*
- Patented thumbturn indicator
- Patent pending indicator retrofit kit
- Field reversible for handing



468 Outside Shown



Thumbturn Indicator Shown

DEADBOLT STATUS INDICATOR AVAILABILITY

460 Series Grade 2

- Double indicator provided standard for indicator x blank plate function (468)
- Single indicator available as an option for thumbturn on cylinder x thumbturn function (465)
- Single indicator retrofit kits available to upgrade outside on cylinder functions (deadbolt provided separately, see chart next page for compatibility)

480 Series Grade 1

- Single indicator retrofit kits available to upgrade outside on cylinder functions (deadbolt provided separately, see chart next page for compatibility)

INDICATOR OPTIONS CODES (USED ONLY WITH BLANK PLATE FUNCTION AND FOR THUMBTURN INDICATOR)

Indicator option codes are designed to convey wording and color in one simple code and must be specified when ordering.

| Single Indicator | | | |
|------------------|-------------|-----------------|-----------|
| Available For | Option Code | Inside Wording | Color |
| 465 Thumbturn | V01 | Unlocked/Locked | Green/Red |
| | V01F | Ouvert/Fermé | Green/Red |
| | V04 | Unlocked/Locked | White/Red |

| Double Indicator | | | | |
|------------------|-------------|-----------------|-----------------|-----------|
| Available For | Option Code | Outside Wording | Inside Wording | Color |
| 468 | V21 ^ | Vacant/Occupied | Unlocked/Locked | Green/Red |
| | V21F | Libre/Occupée | Ouvert/Fermé | Green/Red |
| | V54 | Vacant/Occupied | Unlocked/Locked | White/Red |

| Outside | | Inside | |
|------------|--------------|--------------|------------|
| VACANT | OCCUPIED | UNLOCKED | LOCKED |
| LIBRE | OCCUPÉE | OVERT | FERMÉ |
| VACANT | OCCUPIED | UNLOCKED | LOCKED |

See page 8 for indicator option codes used with retrofit kits.

^ V21 provided standard for 468 unless otherwise specified

*Oversized thumbturn standard on 460 Series only at this time. Other functions available by special application. Contact customer service for more details.

Status Indicator Retrofit Kit

Retrofit kits are available to provide status indicators for the keyed side of 480 or 460 Series cylindrical deadbolts. Kits include all parts required to upgrade the outside to display Locked/Unlocked status.

CERTIFICATIONS

UL/cUL Classified for use on 3-hour fire doors using SARGENT 480 or 460 Series deadbolts.

KIT MODELS

Separate kits are available to accommodate fixed core cylinders, large format interchangeable core (LFIC) or small format interchangeable core (SFIC).

| Model # | Description |
|---------|---|
| SA201 | Used with fixed core cylinder deadbolts |
| SA202 | Used with SFIC deadbolts |
| SA203 | Used with LFIC deadbolts |




Shown with 460 Series deadbolt (ordered separately)

STATUS INDICATOR OPTION CODES (USED ONLY WITH RETROFIT KITS)

Indicator option codes are designed to convey wording and color in one simple code and must be specified when ordering.

| Single Indicator | | | |
|------------------|-------------|-----------------|-----------|
| Available For | Option Code | Outside Wording | Color |
| SA201 | V10 | Unlocked/Locked | Green/Red |
| SA202 | V10F | Ouvert/Fermé | Green/Red |
| SA203 | V40 | Unlocked/Locked | White/Red |



KIT FINISHES

Retrofit kits are available in the following finishes: 10BE, 26D, BSP

KIT COMPATIBILITY

Retrofit kits do not include deadbolts. Deadbolts must be ordered separately.

Kits are compatible with the following SARGENT 480 and 460 Series functions:

| Function Description | 480 Series Grade 1 | 460 Series Grade 2 |
|--|--------------------|--------------------|
| Cylinder x Thumbturn | 485 | 465 |
| Cylinder x Cylinder (outside only) | 484 | 464 |
| Cylinder x Blank Rose (exposed screws) | 486 | — |

758 & 858 Padlock Features

- Cylinder easily removed while in the unlocked position for rekeying
- Available in the following single key sections S, R, U, CR and the following keyway families L, R, H, C, A, B, K, N, V
- Easily keyed into SARGENT master keyed systems
- 6 pin cylinder standard
- Shackle locked by dual ball bearings for extra security



Specifications: 758 & 858 Padlocks Body-Solid Brass for exterior applications

| | |
|------------------------------------|--|
| Cylinder | Utilizes standard 10 Line cylinder with shorter padlock tail piece, keyed different as standard (cylinder catalog part no. C750-1) |
| 758 | Key retaining. Key removable in locked position only |
| 858 | Non key retaining. Key can be removed while unlocked and relocked without key |
| Case | Satin brass. Solid one piece construction 2" x 2-1/4" |
| Keys | Two keys provided as standard |
| Shackle Heights | 1" Standard, for 2" (specify 758-2 & 858-2), and 4" (specify 758-4 & 858-4) all 11/32" diameter |
| Shackle Material | Stainless steel shackle standard for 758 and 858 Hardened steel - optional (specify 758HS or 858HS) |
| Weather Protection Standard | Shackle protected with rubber shields to prevent freezing in the winter |
| Chain (optional) | Chain 9" long (specify 758C or 858C) |

758 & 858 Padlocks options see page 14

How To Order

| SC- | 758 | 2 | HS | C |
|---------------------------------|----------|----------------|---------------------|-------|
| Options | Padlocks | Shackle Height | Shackle Material | Chain |
| Cylinder options see page 13-14 | 758 | 1" - Std | Hardened Steel - HS | C |
| | 858 | 2" - 2 | | |
| | | 4" - 4 | | |

Keso F1 & Keso 856 & 857 Padlocks

- Available with Keso F1- and Keso; specify F1-82- for Keso F1- specify 82 for std Keso
- Same cylinder security as offered in other Keso Security System locks. Can be masterkeyed with all locks in the system
- Positive deadlocking construction — no springs which can be forced
- Two stainless steel balls lock shackle. Forcing of shackle increases locking action



82-856 Shown

Specifications: F1-82-856 and F1-82-857

| | |
|------------------------------------|--|
| 856 | Non key retaining. Key can be removed while unlocked and relocked without key |
| 857 | Key Retaining. Key removable in locked position only |
| Case | Brass |
| Case Finishes | Satin brass standard |
| Case Dimensions | 2" x 2" x 1-1/8" |
| Shackle | Stainless Steel standard Hardened steel, Nickel Plated - optional (specify 856HS or 857HS) |
| Shackle Diameter | 11/32" |
| Shackle Clearance | 1" Standard, for 2-1/2" (specify 856-2 & 857-2), and 4" (specify 856-4 & 857-4) |
| Weather Protection Standard | Shackle protected with rubber shields to prevent freezing |
| Chain (optional) | Chain 9" long (specify 856C or 857C) |


How To Order

| F1-82- | 856 | -2 | HS | C |
|---------|----------|----------------|---------------------|-------|
| Options | Padlocks | Shackle Height | Shackle Material | Chain |
| F1-82- | 856 | 1" - Std | Hardened Steel - HS | C |
| 82- | 857 | 2-1/2" - 2 | | |
| | | 4" - 4 | | |

Copyright © 2007-2026, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent: www.assaabloyds.com/patents.

Specifications: 1655 Series

| | |
|-----------------------|---|
| For Doors | One size for doors 1-1/2" thick and when used with 4 supplied 1/8" spacers can be used on thinner doors down to 1 inch thick |
| For Stiles | 1-1/2" wide minimum |
| Strike | Universal |
| Bolt | Steel, 15/16" projection |
| Cylinder | Brass, 6 pin standard, (cylinder catalog part no. C 1655-1) with different tail piece (part no. 13-1813) |
| Keying options | 2 change keys per lock provided, 5 pin available 10- SARGENT Signature Key System 11- SARGENT XC Key System 21- SARGENT Construction key system (Lost Key) |
| Case | Non ferrous alloy |
| Hand | Easily field reversible |
| Finishes | 04, 26D |
| Applications | Lockers or mailboxes |



1655MKD - Can be masterkeyed (MKD) and grand masterkeyed in most SARGENT 6 pin systems. Consult factory for details. Cylinder easily removed for rekeying.



Shown with spacers for use on thinner doors



Shown without spacers



C1655-1 cylinder

Please note: Not offered with small or large interchangeable cores


How To Order

| Specify | Note | Example |
|---------|------|--------------------|
| Option | 21- | 21- |
| Product | 1655 | 21-1655 |
| Finish | 26D | 21-1655 x 26D |
| Keying | AA45 | 21-1655 x 26D AA45 |

Specifications: 4142-4143 Cabinet Lock

| | |
|-------------------------|---|
| For Metal Doors | Up to 7/8" thick. Strike by others. |
| Cylinder | Brass, 6 pin, can be master keyed with most other SARGENT locks |
| Cam | Bronze, 4142 horizontal in locked position (attached with 2 screws) |
| Keys | Two 6 pin provided |
| Cylinder Options | 21- SARGENT Construction key system (Lost Key) |
| Hand | 4142 supplied right hand as standard, easily field reversible |
| Easily field | 4142 Horizontal in Locked Position (Cam Rotated) reversible 4143 Vertical in locked position |
| Finishes | 03, 04, 09, 10, 10B, 10BE, 10BL, 20D, 32, 32D, BSP, WSP |


4142 Right Hand Shown

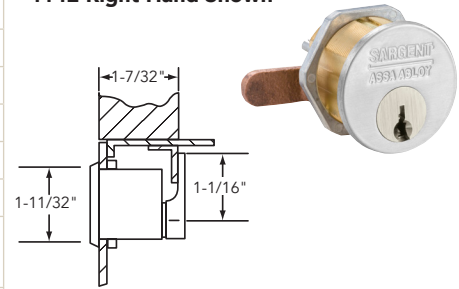

Specifications: KESO 4152 Cabinet Lock for Drawers

| | |
|-------------------------|---|
| For Drawers | Up to 3/4" thick |
| Cam | Flat Steel Cam (order as 4152) 1/4" Offset Steel Cam (order as 4152-2) |
| Cylinder | Keso security system only. Can be masterkeyed with all other Keso locks in the system |
| Mounting Plate | Furnished with screws for mounting to wood or metal drawers. Can be brazed to metal doors. |
| Field Reversible | Right or left hand |
| Finishes | 03, 04, 09, 10, 10B, 10BL, 20D, 26, 26D, BSP |

4152-2 Shown

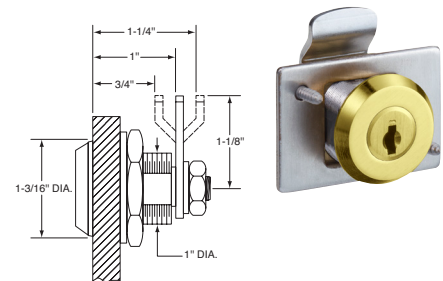

Specifications: KESO F1 4252 Cabinet Lock for Drawers

| | |
|-------------------------|---|
| For Drawers | Up to 3/4" thick |
| Cam | Flat Steel Cam (order as F1-4252) 1/4" Offset Steel Cam (order as F1-4252-2) |
| Cylinder | Keso F1 security system only. Can be masterkeyed with all other Keso locks in the system |
| Mounting Plate | Furnished with screws for mounting to wood or metal drawers Can be brazed to metal doors |
| Field Reversible | Right or left hand |
| Finishes | 03, 04, 09, 10, 10B, 10BL, 20D, 26, 26D, BSP |

How To Order

- Example: 4142 x 32D

How To Order

- Example: 4152 x 26D

Copyright © 2007-2026, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent: www.assaabloyds.com/patents.

Cylinder Options by Product Line

| Cylinder Type | Option | Description | 8200 & 4870 Dead Bolt | 480 Dead Bolt | 460 Deadbolt | 758 & 858 Padlocks | 856 & 857 Padlocks | 1655 Locker Lock | 4142-4143 Cabinet Locks | 4152 & 4252 Cabinet Locks |
|---|--|---|-----------------------|---------------|--------------|--------------------|--------------------|------------------|-------------------------|---------------------------|
| Conventional Cylinder | Std | SARGENT Conventional Cylinders | Yes | Yes | Yes | Yes | N/A | Yes | Yes | N/A |
| Degree Key System | DG1- | SARGENT Degree Key System Level 1 | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A |
| | DG1-21- | Degree Level 1 Construction Master Keying | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A |
| | DG1-60- | Degree Level 1 Removable Disposable Construction Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG1-63- | Degree Level 1 Removable Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG1-64- | Degree Level 1 Removable Construction Keyed LFIC | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG1-65- | Degree Level 1 Unassembled/Uncombined Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG2- | SARGENT Degree Key System Level 2 | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A |
| | DG2-21- | Degree Level 2 Construction Master Keying | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A |
| | DG2-60- | Degree Level 2 Removable Disposable Construction Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG2-63- | Degree Level 2 Removable Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG2-64- | Degree Level 2 Removable Construction Keyed LFIC | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG2-65- | Degree Level 2 Unassembled/Uncombined Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | DG3- | SARGENT Degree Key System Level 3 | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A |
| | DG3-21- | Degree Level 3 Construction Master Keying | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A |
| | DG3-60- | Degree Level 3 Removable Disposable Construction Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| DG3-63- | Degree Level 3 Removable Core | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A | |
| DG3-64- | Degree Level 3 Removable Construction Keyed LFIC | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A | |
| Signature Key System | 10- | SARGENT Signature Key System (Not Available with other Key Systems) | Yes | Yes | Yes | Yes | N/A | Yes | N/A | N/A |
| | 10-21- | SARGENT Signature Construction Key System (Lost Ball) | Yes | Yes | Yes | Yes | N/A | Yes | N/A | N/A |
| Signature: Large Format Interchangeable Core (Removable Core) | 10-63- | SARGENT Signature LFIC (Removable Core) Cylinder | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| XC- Key System | 11- | XC Key System (Not Available with other Key Systems, Unless specified) | Yes | Yes | Yes | Yes | N/A | Yes | N/A | N/A |
| | 11-21- | XC- Construction Key System (Lost Ball) | Yes | Yes | Yes | Yes | N/A | Yes | Yes | N/A |
| XC- Large Format Interchangeable Core + (Removable Core) | 11-60- | Hardware to accept XC- Permanent LFIC (Removable Core), Disposable plastic Core- provided | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | 11-63- | Hardware provided with XC- LFIC (Removable Core) Cylinder - (Includes masterkeying, grand masterkeying) | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| | 11-64- | Hardware provided with Keyed construction core to accept XC- LFIC (Removable) Permanent Core (ordered Separately) | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A |
| XC- Small Format Interchangeable Cores+ | 11-70-7P- | Hardware to accept XC- SFIC (7 pin) XC- Permanent Cores, plastic disposable core provided | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A |
| | 11-72-7P- | Hardware to accept XC- SFIC (7 pin Keyed Construction Core provided) cylinder, Permanent core ordered separately | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A |
| | 11-73-7P- | Hardware supplied with XC- Small Format 7 pin interchangeable core (Includes masterkeying, grand masterkeying) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A |
| | 11-65-73-7P- | Hardware to accept XC- Uncombined 7 pin SFIC (Permanent) Core - (Packed Loose) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A |
| Construction Key Systems | 21- | SARGENT Lost Ball Construction Keying for Conventional, XC and Signature Series (N/A with 63-, 73-, 82-, SC- & SE-) | Yes | Yes | Yes | Yes | N/A | Yes | Yes | N/A |
| Old Style Removable Core | 51- | Removable Core Cylinder (Old Style) provided (Existing systems only) | Yes | N/A | N/A | Yes | N/A | N/A | N/A | N/A |
| | 52- | Removable Construction Core (Old Style) Permanent core ordered separately (existing systems only) | Yes | N/A | N/A | Yes | N/A | N/A | N/A | N/A |

NOTE: For V-10 Cylinder and information, contact ASSA
NOTE: When tying into existing key systems contact Key Records for compatibility
 + For use in SARGENT hardware ordered to accept XC- option

Copyright © 2007-2026, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent, pending and/or patent: www.assaabloydss.com/patents.

Cylinder Options by Product Line

| Cylinder Type | Option | Description | 8200 & 4870 Deadbolt | 480 Dead Bolt | 460 Deadbolt | 758 & 858 Padlocks | 856 & 857 Padlocks | 1655 Cabinet Lock | 4142-4143 Cabinet Locks | 4152 Cabinet Lock | 4252 Cabinet Lock |
|--|-----------|--|----------------------|---------------|--------------|--------------------|--------------------|-------------------|-------------------------|-------------------|-------------------|
| Large Format Interchangeable Core (Removable Core) | 60- | Hardware to accept Permanent LFIC (Removable Core), Disposable plastic Core provided (Permanent Cores Ordered Separately) | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A | N/A |
| | 63- | 6 pin LFIC permanent core provided | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A | N/A |
| | 64- | Hardware supplied with Keyed LFIC construction core to accept Permanent LFIC Core (ordered Separately) | Yes | Yes | N/A | Yes | N/A | N/A | N/A | N/A | N/A |
| Small Format Interchangeable Cores | 70- | Hardware to accept 6 or 7 Pin SFIC Permanent Cores (ordered separately), plastic disposable core provided | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 72- | Hardware to accept 6 or 7 Pin SFIC supplied with Keyed Construction Core. (Permanent Core Ordered separately) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 73- | Hardware supplied with 6 pin SFIC (Includes masterkeying, grand masterkeying) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 65-73- | Hardware provided to accept Uncombined 6 pin SFIC (Permanent) Core - (Packed Loose for field keying) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 65-73-7P- | Hardware provided to accept Uncombined 7 pin SFIC (Permanent) Core - (Packed Loose for field keying) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 73-7P- | Hardware supplied with Small Format 7 Pin Interchangeable Core (Includes masterkeying, grand masterkeying) | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Keso F1 & Keso | 81- | Hardware provided with housings to accept Keso (83) & Keso F1 (F1-83-) removable cores. (Permanent Cores Ordered Separately) | Yes | N/A | N/A | N/A | N/A | N/A | N/A | Std. | N/A |
| | 82- | Hardware provided with standard Keso Security Cylinder | Yes | N/A | N/A | N/A | Std | N/A | N/A | N/A | N/A |
| | F1-82- | Hardware provided with standard Keso F1 Security Cylinder (Patented) | Yes | N/A | N/A | N/A | Specify F1- | N/A | N/A | Specify F1- | Std. |
| | 83- | Hardware supplied with SARGENT Keso Security Removable Core cylinder | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | F1-83- | Hardware supplied with SARGENT Keso F1 Security Removable Core cylinder (Patented) | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 84- | Hardware provided with SARGENT Keso Construction Cores (Permanent Removable Cores ordered separately) | Yes | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bump Resistant | BR- | Bump Resistant Cylinder (Available with Conventional & Conventional XC Cylinders Only) | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A | N/A |
| Less Cylinder | LC- | Less Cylinder | Yes | Yes | Yes | N/A | N/A | N/A | N/A | N/A | N/A |
| Schlage Keyways | SC- | Schlage C keyway cylinder, 0 bitted | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A | N/A |
| | SE- | Schlage E keyway cylinder, 0 bitted | Yes | Yes | Yes | Yes | N/A | N/A | N/A | N/A | N/A |

NOTE: For V-10 Cylinder and information, contact ASSA
NOTE: When tying into existing key systems contact Key Records for compatibility
 + For use in SARGENT hardware ordered to accept XC- option

Copyright © 2007-2026, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent: www.assaabloydss.com/patents.

| SARGENT # | Description | ANSI/BHMA |
|-----------|--------------------------------------|-----------|
| 03 | Polished brass, clear coated | 605 |
| 04 | Satin brass, clear coated | 606 |
| 09 | Polished bronze, clear coated | 611 |
| 10 | Satin bronze, clear coated | 612 |
| 10B | Oxidized bronze, oil rubbed | 613 |
| 10BE | oxidized satin bronze, equivalent | 613E |
| 10BL | Oxidized satin, bronze, clear coated | 613L |
| 14 | Polished nickel, clear coated | 618 |
| 15 | Satin nickel, clear coated | 619 |
| 20D | Statuary dark bronze, clear coated | 624 |
| 26 | Polished chrome | 625 |
| 26D | Satin chrome | 626 |
| 32 | Polished stainless steel | 629 |
| 32D | Satin stainless steel | 630 |
| BSP | Black Suede Powder Coat | BSP |
| WSP | White Suede Powder Coat | WSP |

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

SARGENT[®]

ASSA ABLOY

SARGENT Manufacturing Company
100 Sargent Drive
New Haven, CT 06511 USA
800-727-5477
www.sargentlock.com

Founded in the early 1800s, SARGENT[®] is a market leader in locksets, cylinders, door closers, exit devices, electro-mechanical products and access control systems for new construction, renovation, and replacement applications. The company's customer base includes commercial construction, institutional, and industrial markets.

Copyright © 2007-2026, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.