

ACCENTRA®

ASSA ABLOY

Experience a safer
and more open world

1500 SERIES

Traditional Exit Device



TABLE OF CONTENTS

Contents

Introduction	3
Benefits & Features	4
Finishes	5
How to Order	6
1500(F) Rim	7
1510(F) Surface Vertical Rod	8
1520(F) Concealed Vertical Rod	9
1530(F) Mortise	10
Trim Designs	11-12
Exit Device Trims	13-14
Applications Chart	15
Applications	16-17
Cylinders	18-20
Strikes	21
Accessories	22
Mullions	23-25
Technical Specifications & Listings	26

1500 Traditional Exit Devices

1500 Series Traditional Exit Devices are the perfect solution for modern retrofit applications that require maintaining the look and integrity of historic architectural motifs. Available with a variety of trims and options, the 1500 Series is able to suit a range of decor and application requirements.








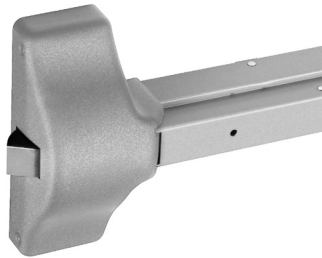
WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

INTRODUCTION

ASSA ABLOY ACCENTRA® offers innovative and reliable products to solve the challenges of commercial, retail, hospitality, assisted living, mixed-use, and multi-family properties. Our door hardware expertise extends beyond products to people - and provides the service and support you expect.

Featuring durable products to meet all your facilities' requirements - and the quality you expect from a leader in the hardware industry.

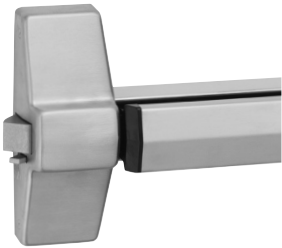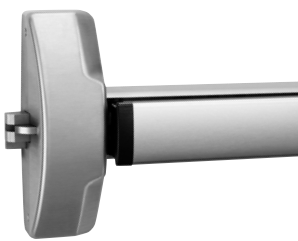ASSA ABLOY ACCENTRA® Exit Devices			
7000 Series	6000 Series	2100 Series	1800 Series
			
			
<ul style="list-style-type: none"> • Ideal for facilities that require durability and innovation to meet their security needs • Wide & Narrow Stile Applications • Rim, SquareBolt, Mortise, SVR & CVR • Mechanical & Electro-Mechanical Functions • Available with Motorized Electric Latch Retraction • Constructed with high quality steel and heavy-duty components • 16 Standard finishes including BSP (Black Suede Powder Coat) • ANSI/BHMA Certified Grade 1 • UL Rated for Panic & Fire, Windstorm Rated Options (refer to local codes) • 5 Year Warranty and Two-Year Limited Warranty on Electronic Components 	<ul style="list-style-type: none"> • Ideal for facilities that require modern form and full functionality to meet their life safety needs • Wide & Narrow Stile Applications • Rim, Squarebolt, CVR, SVR & Mortise • Mechanical & Electro-Mechanical Functions • Available with Motorized Electric Latch Retraction • Aluminum rail assembly with Architectural Metals • Solid Cast Flush End Cap • ANSI/BHMA Certified Grade 1 • UL Rated for Panic & Fire • 10 Year Warranty and Two-Year Limited Warranty on Electronic Components 	<ul style="list-style-type: none"> • Ideal for commercial applications and budget conscious end users • Wide Stile Applications • Rim, Squarebolt, CVR & SVR • Mechanical Functions • ANSI/BHMA Grade 1 Certified • UL Rated for Panic & Fire • Architectural & Painted Finishes • 3 Year Warranty 	<ul style="list-style-type: none"> • Ideal for back of the house where function and code compliance are the requirement • Wide Stile Applications • Rim & SVR • Mechanical Functions • ANSI/BHMA Certified Grade 1 • UL Rated for Panic & Fire • Powder-coat Painted Finishes • 3 Year Warranty

BENEFITS & FEATURES

Benefits

- **Great for retrofit applications:** Classic design allows for upgrade in historic buildings, on single or pairs of doors
- **Strong & reliable:** ANSI/BHMA Grade 1 certified for long life and durability

Features

- Available in rim, mortise, surface vertical rod and concealed vertical rod
- Lever, handle and pull trim designs available for design continuity throughout a building
- 2-point hex-key dogging for standard devices enables quiet push-pull door operation during peak traffic hours
- Standard outside trim available with a choice of 6 and 7-pin, interchangeable core, patented and security rim cylinders, keyed as needed



FINISHES

ANSI/BHMA Code Finish Description			
605 Bright Brass, Clear Coated	606 Satin Brass, Clear Coated	611 Bright Bronze, Clear Coated	612 Satin Bronze, Clear Coated
			
613E Dark Oxidized Satin Bronze - equivalent	619* Satin Nickel Plated, Clear Coated	626* Satin Chrome Plated	629 Bright Stainless Steel
			
630* Satin Stainless Steel	693 Black Painted	695 Dark Bronze Painted	BSP Black Suede Powder Coat
			
WSP White Suede Powder Coat			
			

*Finish available with MicroShield® antimicrobial coating, additional finishes by special application. Consult factory for availability.

MicroShield coating may vary finish color from architectural standards. MicroShield is not intended as a substitute for traditional infection control programs such as hand hygiene or use of disinfectants. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY ACCENTRA® makes no representations or warranties, express or implied, as to the efficacy of MicroShield.

HOW TO ORDER

The following selection guide indicates the correct cylinder for each locking segment.

Quantity	X	0	Suffix	Size	Design	Trim	Finish	Other Info
15	Third Position: 0 - Rim Device 1 - SVR Device 2 - CVR Device 3 - Mortise Device		Suffix - Mechanical Feature: "F" - Fire Exit Device "L5" - Mortise Device, Entry by Key with/without Rigid Lever. Mortise Device EO or entry by key. "L8" - Mortise Device, Entry by Lever. "T5" - Mortise Device with Thumbpiece Trim "T8" - Mortise Device, Active Thumbpiece Trim.	Size: (DOW = Door Opening Width) "36" - Thru 36" (90cm) "48" - Thru 48" (120cm)	Trim Design: (Lever only.)	Trim Model Number	Finish Code: See Page 5	Other Information: Door Hand - All devices and lever handle trim. Door Thickness - over 1-3/4" (45mm). Fastener Options - Torx® Security Screws, SNB (wood, composite, or unreinforced metal doors). Specialty Cylinders & Components

Packaging

It is recommended that exit devices and trim for the same opening be ordered together. Standard product are for 1-3/4" (44mm) reinforced metal doors. Accessories detached from the device and trim should be specified separately. Materials by others are required to be fit for the purpose as detailed in this catalog and the product installation literature.


1500(F) RIM

The 1500(F) is a traditional exit device for single swing doors or pairs of doors with mullions of metal, wood or composite construction.



Certification/Compliance

UL/cUL Listed: FVSR/FVSR7 - Panic hardware
 GXHX/GXHX7 - Fire exit hardware (F)
 (4' x 8' single, 8' x 8' pairs, 3 hr.)

ANSI/BHMA Certified: A156.3 Type 1, Grade 1 

Features

- Designed for wide stile doors
- Handed, specify hand (field reversible)

Applications

- Single swing doors
- Pairs of doors with removable mullions
- Metal, wood or composite door materials

Specifications

Door Opening Width	-36 for 30" - 36" (76cm - 91cm) doors -48 for 36" - 48" (91cm - 122cm) doors
Door Thickness	1-3/4" (44mm) standard
Minimum Stile Width	4-1/2" (114mm)
Projection	5-5/8" (143mm) active, 4-1/2" (114mm) depressed.
Latchbolt	3/4" (19mm) deadlocking stainless steel pullman-type
Strike	799 (panic & fire), 793 optional (double door application)
Fasteners	Machine screws and wood door fasteners standard for panic hardware. Sex nuts and bolts supplied standard for fire exit hardware.
Trims	620F series escutcheon trim, 630F series pull/thumbpiece trim. See pages 13-14.
Dogging	Hex key dogging supplied standard on panic devices
Options	Sex nuts and bolts
Warranty	1-year limited


1510(F) SURFACE VERTICAL ROD

The 1510(F) is a traditional surface vertical rod exit device for any door where two-point latching is desired (inactive doors of pairs in particular).

Packed for 7'0" high (2.13m) openings with recommended template. Field cut rods or use rod extensions for other applications.

Certification/Compliance

UL/cUL Listed: FVSR/FVSR7 - Panic hardware
GXHX/GXHX7 - Fire exit hardware (F)
(8' x 8' pairs, 3 hr.)

ANSI/BHMA Certified: A156.3 Type 2, Grade 1 



Features

- Designed for wide stile doors
- Handed, specify hand (field reversible)
- Positive action linkage on a deadlocking top pullman bolt
- Simultaneous direct pull bottom deadbolt
- When unlatched, device keeps both bolts retracted until door is shut

Applications

- Pairs of doors
- Double egress
- Metal, wood or composite door materials

Specifications

Door Opening Width	-36 for 30" - 36" (76cm - 91cm) doors -48 for 36" - 48" (91cm - 122cm) doors
Door Opening Height	Standard door height 7' (213cm), with the device centerline at 39-5/16" (100cm) from floor. Optional heights up to 8' (fire) and 10' (panic) available by using rod extensions.
Door Thickness	1-3/4" (44mm) standard
Minimum Stile Width	4-1/2" (114mm)
Projection	5-5/8" (143mm) active, 4-1/2" (114mm) depressed.
Latchbolt	Top: 3/4" (19mm) throw, pullman-type with automatic deadlatching Bottom: 5/8" (16mm) throw deadbolt, held retracted during door swing
Vertical Rods	1/2" (13mm) O.D. tubular brass, bronze or stainless steel with rod guides
Strike	Top: Roller type 791. Bottom: Flush mounted 790. 794 floor strike optional (threshold openings), 702 floor strike optional (BPL devices).
Fasteners	Machine screws and wood door fasteners standard for panic hardware. Sex nuts and bolts supplied standard for fire exit hardware.
Trims	620F series escutcheon trim, 630F series pull/thumbpiece trim. See pages 13-14.
Dogging	Hex key dogging supplied standard on panic devices
Options	Sex nuts and bolts, bottom pullman latch (panic only), rod extensions
Warranty	1-year limited

1520(F) CONCEALED VERTICAL ROD

The 1520(F) is a traditional concealed vertical rod exit device for metal doors where two-point latching is desired (inactive doors of pairs in particular.)

Certification/Compliance

UL/cUL Listed: FVSR/FVSR7 - Panic hardware
GXHX/GXHX7 - Fire exit hardware (F)
(8' x 8' pairs, 3 hr.)

ANSI/BHMA Certified: A156.3 Grade 1, Type 8, Grade 1 



Features

- Designed for wide stile doors
- Handed, specify hand (field reversible)
- Positive action linkage on a deadlocking top pullman bolt
- Simultaneous direct pull bottom deadbolt
- When unlatched, device keeps both bolts retracted until door is shut

Applications

- Pairs of doors
- Double egress
- Metal doors only

Specifications


Door Opening Width	-36 for 30" - 36" (76cm - 91cm) doors -48 for 36" - 48" (91cm - 122cm) doors
Door Opening Height	Standard door height adjustable to 8' (244cm). Optional heights up to 10' (panic) available by using rod extensions.
Door Thickness	1-3/4" (44mm) standard
Minimum Stile Width	4-1/2" (114mm)
Projection	5-5/8" (143mm) active, 4-1/2" (114mm) depressed.
Latchbolt	Top: 3/4" (19mm) throw, pullman-type with automatic deadlatching Bottom: 5/8" (16mm) throw deadbolt, held retracted during door swing
Vertical Rods	1/2" (13mm) O.D. telescoping tubular rods
Strike	Top: Roller type 791. Bottom: Flush mounted 790. 794 floor strike optional (threshold openings)
Fasteners	Machine screws and wood door fasteners standard for panic hardware. Sex nuts and bolts supplied standard for fire exit hardware.
Trims	620F series escutcheon trim, 630F series pull/thumbpiece trim. See pages 13-14.
Dogging	Hex key dogging supplied standard on panic devices
Options	Sex nuts and bolts, rod extensions
Warranty	1-year limited

1530(F) MORTISE

The 1530(F) is a traditional exit device integrated with ASSA ABLOY ACCENTRA® 8700 series mortise lock for the active leaf of pairs and single doors where both exit device and security are required. Can be installed on metal, wood or composite doors. The 8700 series mortise lock used is modified for use with exit devices only.

Certification/Compliance

UL/cUL Listed: FVSR/FVSR7 - Panic hardware
GXHX/GXHX7 - Fire exit hardware (F)
(4' x 8' single, 8' x 8' pairs, 3 hr.)
(4' x 9' single, 8' x 9' pairs, 1-1/2 hr.)

ANSI/BHMA
Certified: A156.3 Type 3, Grade 1 



Features

- Designed for wide stile and flush doors
- Handed; specify hand
- Two-piece mechanical 3/4" throw deadlocking stainless steel latchbolt

Applications

- Single swing doors
- Pairs of doors with vertical rod devices or automatic flush bolts
- Metal, wood or compatible door materials

Order as follows, according to function.







1530-K5(F)	(01) Exit only. (02) Entry by pull when dogged. (03) Key retracts latchbolt.
1530-L5(F)	(02) Entry by rigid lever when dogged. (03) Key retracts latchbolt.
1530-T5(F)	(02) Entry by pull when dogged. (03) Key retracts latchbolt.
1530-L8(F)	(08) Entry by lever lock/unlocked by key or lever only (passage).
1530-T8(F)	(05) Entry by thumbpiece lock/unlocked by key or thumbpiece only (passage).

Specifications

Door Opening Width	-36 for 30" - 36" (76cm - 91cm) doors -48 for 36" - 48" (91cm - 122cm) doors
Door Thickness	1-3/4" (44mm) standard. 2" and 2-1/4" (51mm and 57mm) optional; specify when ordering.
Minimum Stile Width	4-1/2" (114mm)
Projection	5-5/8" (143mm) active, 4-1/2" (114mm) depressed.
Latchbolt	Two piece mechanical 3/4" (19mm) deadlocking stainless steel with anti-friction insert and auxiliary deadlocking latch
Strike	798 curved lip, non-handed standard. 712 optional for door pairs with astragals. 718 optional open back strike.
Fasteners	Machine screws and wood door fasteners standard for panic hardware. Sex nuts and bolts supplied standard for fire exit hardware.
Trims	350F/620F/650F series escutcheon trim, 630F/660F/670F series pull/thumbpiece trim. See pages 13-14.
Dogging	Hex key dogging supplied standard on panic devices
Options	Sex nuts and bolts
Warranty	1-year limited

TRIM DESIGNS

































Standard

<p>Arcadia AR </p>	<p>Augusta AU </p>	<p>Carmel CR </p>
<p></p> <p>Projection: 3-1/4" (82mm)</p>	<p></p> <p>Projection: 2-5/8" (61mm)</p>	<p></p> <p>Projection: 3-1/8" (79mm)</p>
<p>Jefferson JN </p>	<p>Monroe MO </p>	<p>Pacific Beach PB </p>
<p></p> <p>Projection: 2-9/16" (65mm)</p>	<p></p> <p>Projection: 3" (76mm)</p>	<p></p> <p>Projection: 3-5/16" (84mm)</p>
<p>Pinehurst PN </p>	<p>Virginia VI </p>	<p>Hampton HA </p>
<p></p> <p>Projection: 3-1/16" (78mm)</p>	<p></p> <p>Projection: 3-1/8" (79mm)</p>	<p></p> <p>Projection: 3-3/8" (86mm)</p>

Note: Projection dimensions are provided using the 620F series escutcheon plates.

TRIM DESIGNS

Reflections® Levers 

Hudson	TB 	UB 	TC 	TD 	UC 		
Projection	3-1/16" (78mm)	3-1/4" (83mm)	3" (76mm)	3-7/16" (87mm)	3-7/16" (87mm)		
Spree	RS 	RT 	RU 	RV 			
Projection	3-1/8" (79mm)	3-1/8" (79mm)	3-13/32" (87mm)	3" (76mm)			
Seine	TE 	TG 	TI 	TJ 	TK 	GT 	
Projection	3" (76mm)	2-13/16" (61mm)	3-3/8" (85mm)	3-1/16" (78mm)	3-1/4" (83mm)	3-1/4" (83mm)	
Thames	TM 	TN 	TP 	TR 	TS 	TQ 	
Projection	3-1/16" (78mm)	3-1/16" (78mm)	3-5/16" (84mm)	3-1/16" (78mm)	3-1/8" (80mm)	3-1/16" (78mm)	
Victoria	TT 	TU 	TW 	TX 	UX 	TY 	WG 
Projection	2-11/16" (68mm)	3-1/4" (83mm)	3" (76mm)	3-5/8" (92mm)	3-7/16" (87mm)	3-5/16" (84mm)	3-5/8" (92mm)
Niagara	MA 	RA 	RB 	RC 			
Projection	2-13/16" (71mm)	3-11/16" (94mm)	2-13/16" (71mm)	2-13/16" (71mm)			

Notes:

Projection dimensions are provided using the 620F Series escutcheon plates.

The following Reflections levers are not available in 629 or 630 finish: Victoria TT, TU, TW, TX, TY, UX; Seine TG, TJ, TK, TE, TI; Hudson TD. Please consider the 618 or 619 finish as an alternative. Reflections levers are not available with knurling option.

EXIT DEVICE TRIMS

Rim and vertical rod devices use Universal Lifter Assembly #60-1500-0671-000, to connect to any 620 or 630 Series active trim. Mortise devices are supplied according to trim type and function desired. There is a 1530(F) Series device adequate for each 350, 650, 660 or 670 Series Trim charted.

350F, 620F and 650F Series Escutcheon Trim

- Certified ANSI/BHMA A156.3, Grade 1.
- Trim through-bolts to exit device for strength.
- Beveled sides improve attack resistance.
- Solid forged/cast escutcheon and free-wheeling trim for ideal protection.
- Flush cylinder in 6-pin applications for additional security.
- 1-3/4" (44mm) door standard. For doors through 2-1/4" (57mm) or shim-mounted devices, specify on order.
- Dimensions: 3" x 10-1/4" x 13/16" (76mm x 260mm x 19mm).
- Cylinders not included. See page 18-20 for cylinder options.
- Available with AR, AU, CR, JN, MO, PB, PN, VI, HA lever designs. See page 11.
 - Finishes: 605, 606, 611, 612, 613E, 619, 626, 629, 630, 693, BSP, WSP
- Available with Reflections® lever designs. See page 12.
 - Finishes: 605, 606, 611, 612, 613E, 619, 626, 629, 630, BSP, WSP
- Trim ordering example: AU626F x 626 x RHR.
- 5-year limited warranty.

Application	Cylinder	Classroom/ Storeroom Cylinder Controls Thumbturn	Exit Only Blank Plate	Nightlatch Access by Key	Classroom Cylinder Controls Lever	Storeroom Cylinder Controls Lever	Nightlatch Cylinder by Lever	Passage	Dummy Trim Free- Wheeling	Dummy Rigid Lever
1500(F) 1510(F) 1520(F)	Rim	603F*	620F	621F^	626F	626F*	627F^	628F	628F*	629F
1530(F)	Mortise	--	620F	651F	356F	--	--	358F	--	358F
ANSI		11/12	01	03	08	09	03	14	02	02

*09,12 and Free Wheeling 02 achieved with single trim modification at installation.

^Not recommended for use with vertical rod exit devices.

For 626, 629 & 630 finishes the escutcheon is plated to simulate stainless steel.

For 629 & 630 finishes the standard levers are plated to simulate stainless steel.

EXIT DEVICE TRIMS

630F, 660F and 670F Series Pull/Thumbpiece Trim

- Certified ANSI/BHMA A156.3, Grade 1.
- Trim through-bolts to exit device for strength.
- Beveled sides improve attack resistance.
- Flush cylinder in 6-pin applications for additional security.
- 1-3/4" (44mm) door standard. For doors through 2-1/4" (57mm) or shim-mounted devices, specify on order.
- Plate Dimensions: 2-3/4" x 15-1/2" x 5/8" (70mm x 394mm x 16mm).
- Pull Dimensions: 6-7/16" (164mm) on centers x 2-1/8" (54mm) projection.
- Cylinders not included. See page 18-20 for cylinder options.
- Finishes: 605, 606, 612, 613E, 619, 626, 629, 630, 693, BSP, WSP
- Trim ordering example: 630F x 630
- 5-year limited warranty.









































Applications	Cylinder	Exit Only Blank Plate	Nightlatch Access by Key	Nightlatch Cylinder by Pull	Classroom Cylinder Controls T-Piece	Storeroom Cylinder Controls T-Piece	Dummy Trim Pull Plate	Passage Active T-Piece
1500(F) 1510(F) 1520(F)	Rim	630F	631F^	632F^	633F	633F*	634F	635F
1530(F)	Mortise	630F	661F	662F	673F	--	634F	675F
ANSI		01	03	03	05	06	02	15

*06 achieved with single trim modification at installation.

^Not recommended for use with vertical rod exit devices.

For 626, 629 & 630 finishes the escutcheon is plated to simulate stainless steel.

APPLICATIONS CHART

Trim	Device (ANSI)	Rim (Type 1)	SVR (Type 2)	CVR (Type 8)	Mortise (Type 3)
	Options	1500(F) See page 7	1510(F) See page 8	1520(F) See page 9	1530(F) See page 10
ANSI	Function	Trim Options	Trim Options	Trim Options	Trim Options
01	Exit Only (Blank Plate)	 620F 630F	 620F 630F	 620F 630F	 620F 630F
02	Pull to Open (Dummy Trim)	 625F, 629F ² 634F ²	 625F, 629F ² 634F ²	 625F, 629F ² 634F ²	 358F ² , 634F ² 654F
03	Entrance by Key & Pull (NL)	 621F, 623F 627F ² , 631F 632F ²	 621F, 623F 627F ² , 631F 632F ²	 621F, 623F 627F ² , 631F 632F ²	 356F ² , 651F 661F, 662F ²
05	Cylinder Controls Thumbpiece	 633F	 633F	 633F	 673F
—	Thumbpiece Always Active (Passage)	 635F	 635F	 635F	 675F
06	Key & Thumbpiece (Key Removable When Locked)	 633F ¹	 633F ¹	 633F ¹	
08L	Cylinder Controls Lever	 626F ²	 626F ²	 626F ²	 356F ²
—	Lever Always Active (Passage)	 628F ²	 628F ²	 628F ²	 358F ²
09L	Key & Lever (Key Removable When Locked)	 626F ^{1,2}	 626F ^{1,2}	 626F ^{1,2}	
11	Cylinder Controls Thumbturn	 603F	 603F	 603F	
12	Key & Thumbturn (Key Removable When Locked)	 603F	 603F	 603F	

1 Field conversion required.
2 ADA compliant trim.

APPLICATIONS

Single Door



Rim Exit Device - Standard Opening

- ANSI/BHMA A156.3 Type 1
- Easy installation
- Flush or wide stile metal, wood or composite doors
- Field reversible
- Exit only or with entry trim


Exit Device	Panic Exit: 1500
	Fire Exit: 1500F
Operating Trim	620F or 630F Series
Ordering Example	1500-36" x AU626F x RHR x 626

Mortise Exit Device - Mortise Lock Retrofit

- ANSI/SDI A250.14, (ASA86) prep door
- Flush or wide stile metal, wood, or composite doors
- Mortise lock security with an exit device

Exit Device	Panic Exit: 1530
	Fire Exit: 1530F
Operating Trim	350F, 650F, 660F, 670F Series
Ordering Example	1530-L8-36" x AU356F x RHR x 612

Double Egress Opening

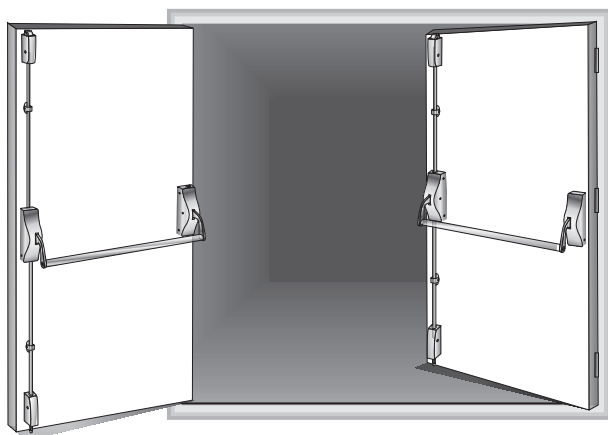

Two Surface Vertical Rod Exit Devices

- ANSI/BHMA A156.3, Type 2
- Two-point latch security
- Flush or wide stile metal, wood or composite doors
- Field reversible
- Smoke control or fire exit
- Two-way traffic control

Exit Device	Panic Exit: (2) 1510
	Fire Exit: (2) 1510F
Operating Trim	620F or 630F Series
Ordering Example	2 each: 1510F-48" x LHR x 626

Two Concealed Vertical Rod Exit Devices

- ANSI/BHMA A156.3, Type 8
- No exposed rods or latchbolts
- ADA compliant
- Flush or wide stile metal doors
- Field reversible
- Smoke control or fire exit
- Two-way traffic control

Exit Device	Panic Exit: (2) 1520
	Fire Exit: (2) 1520F
Operating Trim	620F or 630F Series
Ordering Example	2 each: 1520F x 633F x LHR x 630

APPLICATIONS

Pair Of Doors With Center Mullion




Two Rim Exit Devices - One Removable Mullion

- ANSI/BHMA A156.3
- Type 1
- Easy installation
- Flush or wide stile metal, wood or composite doors
- Exit only or with entry trim
- Recommended for easier traffic flow.

Exit Device	Panic Exit: (2) 1500 x M200
	Fire Exit: (2) 1500F x M200F
Operating Trim	620F or 630F Series
Ordering Example	2 each: 1500-36" x AU626F x 1/2RHR x M200-7'0" x 626

Pair Of Doors Without Mullion

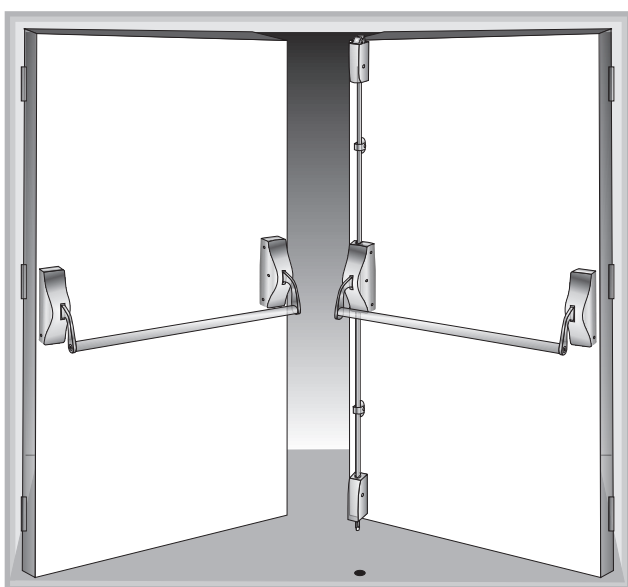

One Mortise - One Vertical Rod Exit Device

- The architectural choice for pairs of doors without mullions
- Flush or wide stile metal, wood or composite doors
- Panic or fire label openings

Exit Device	Panic Exit: 1530 Mortise x 1520 (CVR) or 1510 (SVR)
	Fire Exit: 1530F Mortise x 1520F (CVR) or 1510F (SVR)
Operating Trim	630F, 650F, 660F or 670F Series (Active) x 620F or 630F Series (Dummy or Active)
Ordering Example	1 each: 1530-L8F x AU356F x RHR x 605, plus 1 each 1510F x AU629F x LHR x 605

One Rim - One Vertical Rod Exit Device


- An economic solution for light traffic openings
- Flush or wide stile metal, wood or composite doors

Exit Device	Panic Exit: 1500 Rim x 1510 SVR
Operating Trim	620F or 630F Series
Ordering Example	1 each: 1500-48" x RHR x 632F x 793 x 1510-48" x LHR x 634F x 626

CYLINDERS

Rim

The following chart details rim cylinders for use with 620F and 630F trims:

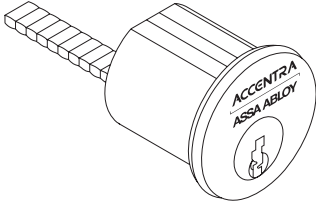				Collar Requirements*	
				620F	630F
Model #	Description	Pins	Length		
1109	Standard Fixed Core	6	1-1/4"	No Collar	No Collar
1109	Standard Fixed Core	7	1-7/16"		KP4
1709	CMK	6	1-15/16"	1765.250	1765.250
1709	CMK	7	1-5/8"		1765.406
1193	LFIC Complete	6	1-7/16"		1765.250
1193	LFIC Complete	7	1-5/8"	1765.344	1765.406
5109	Security Fixed Core	6	1-9/16"	No Collar	1765.250
5109	Security Fixed Core	7	1-7/16"		
U5109	High Security Fixed Core	6	1"		No Collar
U5109	High Security Fixed Core	7	1"		
5193	Security LFIC Complete	6	1-7/16"	1765.250	1765.250
5193	Security LFIC Complete	7	1-5/8"	1765.344	1765.406
K300	ASSA ABLOY ACCENTRA® KeyMark® Standard Fixed Core	6	1-1/8"	KP4	1765.250
K300	ASSA ABLOY ACCENTRA® KeyMark® Standard Fixed Core	7			
K840/ K880	ASSA ABLOY ACCENTRA® KeyMark® LFIC Complete / Housing Only	6	1-7/16"	1765.406	1765.500
K840/ K880	ASSA ABLOY ACCENTRA® KeyMark® LFIC Complete / Housing Only	7	1-5/8"	1765.563	1765.719
K640/ K680	ASSA ABLOY ACCENTRA® KeyMark® SFIC Complete / Housing Only	6	1-1/4"	KP4	1765.250
K640/ K680	ASSA ABLOY ACCENTRA® KeyMark® SFIC Complete / Housing Only	6 or 7	1-3/8"	1765.187	1765.406
A640/ K680	Best® Keyway SFIC Complete / Housing Only	6	1-1/4"	KP4	1765.250
A640/ K680	Best® Keyway SFIC Complete / Housing Only	6 or 7	1-3/8"	1765.187	1765.406
2109	Schlage® "C" Keyway Fixed Core. Available 0-bitted or keyed random.	6	1-1/8"	No Collar	No Collar

*Based on 1-3/4" door thickness. Collar length required must be specified for cylinders and/or housings ordered separately.

LFIC = Large Format Interchangeable Core

SFIC = Small Format Interchangeable Core

CYLINDERS

Mortise

The following chart details mortise cylinders for use with 350F/650F, 660F/670F, and KRM200 and KRM200SM mullions:

				350F/650F		660F/670F		KRM 200							
				Cam	Collar	Cam	Collar	Length	Cam	Collar					
Model #	Description	Pins	Length	Cam	Collar	Cam	Collar	Length	Cam	Collar					
2153	Standard Fixed Core	6	1-1/2"	2160	No Collar	2160	KP4	1-1/8"	2160	1765.312					
2153	Standard Fixed Core	7	1-1/2"					1-1/4"		1765.500					
2196	LFIC Complete	6	1-1/2"					1-1/2"		1765.750					
2197	LFIC Complete	7	1-11/16"					1765.250		1-11/16"	1765.844				
5153	Security Fixed Core	6	1-1/2"					1-1/8"		1765.312					
5153	Security Fixed Core	7	1-1/2"					1-1/4"		1765.500					
U5153	High Security Fixed Core	6	1-1/8"					NA		NA	NA	NA			
U5153	High Security Fixed Core	7	1-1/4"					NA		NA	NA	NA			
5196	Security LFIC Complete	6	1-1/2"					No Collar		KP4	1-1/2"	1765.750			
5197	Security LFIC Complete	7	1-11/16"					KP4		1765.250	1-11/16"	1765.844			
K100	ASSA ABLOY ACCENTRA® KeyMark® Standard Fixed Core	6 or 7	1-1/2"					KC1		No Collar	KC1	KP4	1-1/8"	KC1	1765.312
K100	ASSA ABLOY ACCENTRA® KeyMark® Standard Fixed Core	6 or 7	1-3/4"					Riveted		KP4	Riveted	1765.375
K820/ K860	ASSA ABLOY ACCENTRA® KeyMark® LFIC Complete / Housing Only	6	1-1/2"	KC1	No Collar	KC1	KP4	1-1/2"	KC1	1765.750					
K820/ K860	ASSA ABLOY ACCENTRA® KeyMark® LFIC Complete / Housing Only	7	1-11/16"		KP4		1765.375	1-11/16"		1765.000					
K620/ K660	ASSA ABLOY ACCENTRA® KeyMark® SFIC Complete / Housing Only	6	1-1/4"		NA		NA	1-1/4"		1765.500					
K620/ K660	ASSA ABLOY ACCENTRA® KeyMark® SFIC Complete / Housing Only	6 or 7	1-3/8"		No Collar		1-3/8"	1765.563							
K620/ K660	ASSA ABLOY ACCENTRA® KeyMark® SFIC Complete / Housing Only	6	1-3/4"		Riveted		KP4	Riveted		1765.375		
A620/ K660	Best® Keyway SFIC Complete / Housing Only	6	1-1/4"		KC1		NA	KC1		NA	1-1/4"	KC1	1765.500		
A620/ K660	Best® Keyway SFIC Complete / Housing Only	6 or 7	1-3/8"	No Collar		1-3/8"			1765.563						
A620/ K660	Best® Keyway SFIC Complete / Housing Only	6	1-3/4"	Riveted	KP4	Riveted	1765.375					
2553	Schlage® "C" Keyway Fixed Core. Available 0-bitted or keyed random.	6	1-1/8"	2160	NA	2160	NA	1-1/8"	2160	1765.312					

Based on 1-3/4" door thickness. Collar length required must be specified for cylinders and/or housings ordered separately.



LFIC = Large Format Interchangeable Core

SFIC = Small Format Interchangeable Core

CYLINDERS

Cylinder Collars

If required, cylinder collar size must be specified.

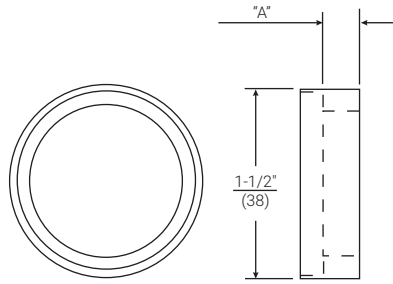

1765 Recessed Cylinder Collar


"A" Dimension: Thicknesses from 1/16" (2mm) to 1-15/32" (37mm) as required.

Material: Brass, Bronze


KP4 Flush Mount Cylinder Collar

Material: Brass, Bronze

Cams





2160





KC1

STRIKES




Rim Devices

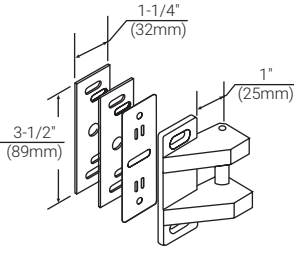	
<p>799 Standard strike for 1500(F) devices. Supplied with three shims, #12-24 machine screws, and #12 wood screws.</p>	<p>793 Optional strike for double door applications without a mullion. Supplied with #10-24 x 3/4" machine screws, two shims (each 1/16" thick), and one locking plate. Panic only.</p>





Vertical Rod Devices - Top Strikes

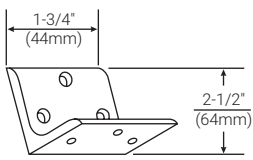	
<p>791 Standard top strike for 1510(F), 1520(F) series devices. Supplied with #10-24 x 3/4" machine screws, two shims (each 1/16" thick), and one locking plate.</p>	<p>797 Optional bracket for mounting 791 top strike in flush transom opening. Supplied with 1/4-20 machine screws; SN-134 sex nuts, optional.</p>

Vertical Rod Devices - Bottom Strikes

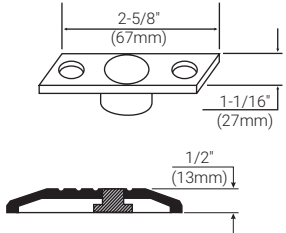		
<p>790 Standard bottom strike for 1510(F), 1520(F) series devices. Press in place.</p>	<p>794 Optional bottom strike for fire openings using saddle thresholds or for flush floor mount. Must use for fire openings with 1/2" thresholds. Supplied with #10-24 x 1/2" machine screws and floor anchors.</p>	<p>702 Optional bottom strike for bottom pullman latch option. Supplied with #8 x 8/32" combination screws.</p>

Mortise Devices

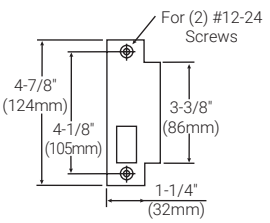			
<p>798 Standard curved lip ANSI strike used with 1530(F) devices. (1-1/4" lip)</p>	<p>712 Optional flat lip ANSI strike used with 1530 devices for pairs of doors with astragals. (7/8" lip)</p>	<p>718 Optional open back strike. Permits opening of the inactive door for pairs of doors where approved by door manufacturer.</p>	<p>202 Optional strike box for ANSI strikes. 7/8" (22mm) deep.</p>

ACCESSORIES


Specialty Fasteners

SNB, 3/8" (10mm) diameter sex nuts for screws packed with exit devices. Supplied in exact number required on factory orders, or use packs as follows. Specify finish.

SN134 - Pack of (4) 1/4-20 sex nuts.

Torx® Security Screws - to deter tampering, supplied only with product order.

Bottom Pullman Latch



(P/No. 60-7010-0051-999), for use only with 1510 SVR devices in openings with pullman latch threshold as shown, threshold by others, or 702 floor strike.

To order with devices, specify "BPL."

Extension Rods

Model #	Length
7010-2	2" (51mm)
7010-6	6" (152mm)
7010-12	12" (305mm)
7010-24	24" (610mm)

Specify finish

MULLIONS


M200(F) Removable Mullion

M200(F) steel mullions are for use with 1500(F) series exit devices. Mullions may be field cut to fit opening. Gray paint finish.

- M200 panic rated. Tubular steel, 2" x 3" (51mm x 76mm). Specify 7'2".
- M200F 3 hour fire rated. Tubular steel, 2" x 3" (51mm x 76mm). Specify 7'2" or 10'1" (Fire rated up to 8')


Notes:

1. For 8' length Mullion must be order as M200F option and cut in the field to 8' size.

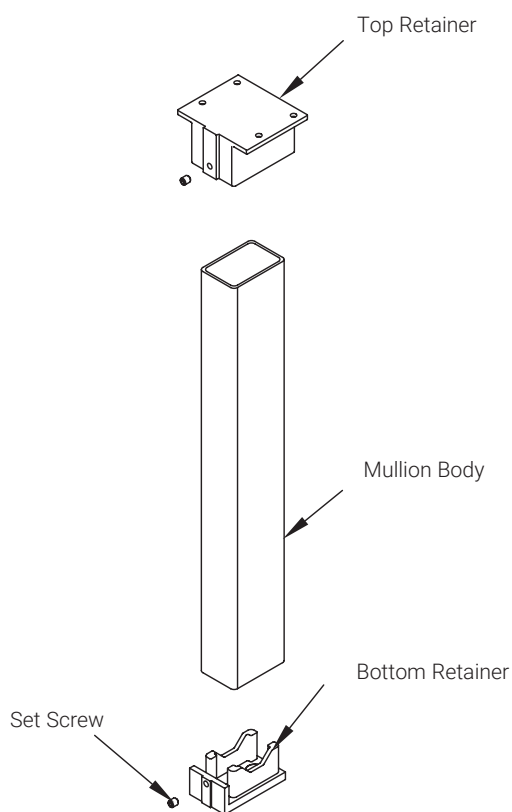


M200(F) Options

M203 Spacer Block Recommended for double rabbeted frames where the stop face width is less than the mounting hole spacing or for applications with 5-3/4" (146mm) or less door frames.



M204 Angle Bracket Recommended for any header configuration with less than 3" (76mm) of mounting surface.



MULLIONS

KRM200(F) Keyed Removable Mullion (KRM)

Keyed removable mullions are for use with 1500(F) series exit devices. They are designed for simple removing when an unobstructed large opening is required and easy replacement and locking to maintain the integrity of the opening.

- KRM200 panic rated. Specify 7'2".
- KRM200F 1-1/2 hour fire rated. Specify 7'2" or 10'1" (Fire rated up to 8')

Notes:

1. For 8' length Mullion must be order as KRM200F option and cut in the field to 8' size.

Split Mullion


- Hassle-free transportation with a 30% smaller packaging size. Mullions may be field cut to fit opening. Gray painted finish. Available only in 8'. When ordering add suffix SM, example M200SM and KRM200SM

M200SM Standard

- Panic rated. Specify 8'
- Tubular steel, 2" x 3" (51mm x 76mm).

KRM200SM Key Removable Split Mullion

- Easy cylinder installation.
- Panic rated. Specify 8'
- Tubular steel, 2" x 3" (51mm x 76mm).

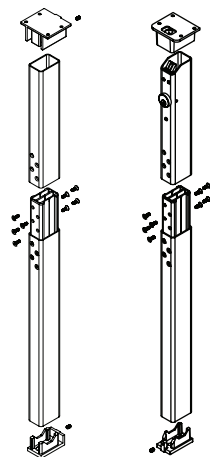


M200SM

KRM200SM

KRM Features

- Easy cylinder installation.
- Mullion automatically relocks when reinstalled without the use of the cylinder key.
- When ordering, add KR prefix to mullion, example: KRM200 and KRM200F.

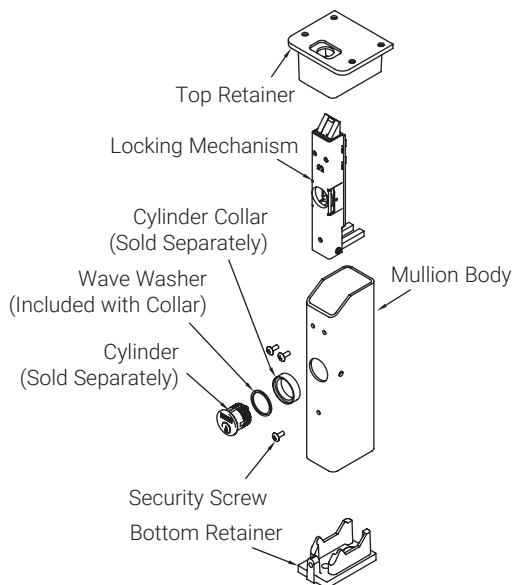


MULLION CYLINDER KIT AND OPTIONS

KRM Options


M203 Spacer Block

Recommended for double rabbeted frames where the stop face width is less than the mounting hole spacing or for applications with 5-3/4" (146mm) or less door frames.



M204 Angle Bracket

Recommended for any header configuration with less than 3" (76mm) of mounting surface.



Mullion Cylinder Kit	Available with the following mullions series
AMCK1	KRM200
	KRM200F
	KRM200SM

Note: Mullion cylinder kit contains washer, collar and cylinder
*Specify finishes and cylinder keyed code when ordering

EX: AMCK1 X FINISH X CYLINDER KEYED CODE
(i.e. AMCK1 X 630 X CT6)

Keyed Codes	Description
CT6	LFIC Complete, 6 Pin
CT6LL	ASSA ABLOY ACCENTRA® KeyMark® LFIC w/Temp LFIC, 6 Pin
CT6SD	ASSA ABLOY ACCENTRA® KeyMark® SFIC w/Temp Disposable SFIC, 6 Pin
CT6SL	ASSA ABLOY ACCENTRA® KeyMark® SFIC w/Temp Lockable SFIC, 6 Pin
CT7	LFIC Complete, 7 Pin
CT7LL	ASSA ABLOY ACCENTRA® KeyMark® LFIC w/Temp LFIC, 7 Pin
CT7SD	ASSA ABLOY ACCENTRA® KeyMark® SFIC w/Temp Disposable SFIC, 7 Pin
CT7SL	ASSA ABLOY ACCENTRA® KeyMark® SFIC w/Temp Lockable SFIC, 7 Pin
CY	Standard Fixed Core
ICLC	LFIC, Less Core
KM	ASSA ABLOY ACCENTRA® KeyMark® Standard Fixed Core
KMLIC	ASSA ABLOY ACCENTRA® KeyMark® LFIC Complete
KMLICH	ASSA ABLOY ACCENTRA® KeyMark® LFIC Housing Only
KMSIC	ASSA ABLOY ACCENTRA® KeyMark® SFIC Complete
KMSICH	ASSA ABLOY ACCENTRA® KeyMark® SFIC Housing Only
S	Security Fixed Core
SC	Schlage® "C" Keyway Fixed Core
SFIC	Best® Keyways SFIC Complete
SFICLC	Best® Keyway SFIC Housing Only
SIC	Security LFIC Complete

TECHNICAL SPECIFICATIONS & LISTINGS

ANSI/BHMA

Certified ANSI/BHMA A156.3, Grade 1.



Fire Listings

1500F series exit devices are UL-cUL Listed for use on fire doors having a rating up to and including 3-hours unless otherwise noted.

Note: Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and ASSA ABLOY ACCENTRA® makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

ISO 9001

Designed and manufactured under a certified ISO 9001 quality system.

Warranty

The 1500 series exit devices carry a one-year warranty. Trims carry a five-year warranty.

The ASSA ABLOY Group is the global leader in access solutions.
Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

ACCENTRA®
ASSA ABLOY

TECHNICAL SUPPORT

(troubleshooting, product use and application, returns)

Tel: 855-557-5078

Email: techsupport.accentra@assaabloy.com

CUSTOMER SUPPORT

(orders, product configuration, pricing, lead-time)

Tel: 855-557-5078 x2

Email: Customerservice.Accentra@assaabloy.com

U.S.A.:

ASSA ABLOY ACCENTRA®

225 Episcopal Road
Berlin, CT 06037-4004

Tel: 1-800-438-1951

Fax: 1-800-338-0965

www.accentra-assaabloy.com

Canada:

ASSA ABLOY Door Security Solutions Canada

160 Four Valley Drive
Vaughan, Ontario L4K 4T9

Tel: 1-800-461-3007

Fax: 1-800-461-8989

assaabloydss.ca

International:

ASSA ABLOY Americas International

Tel: 1-905-821-7775

Fax: 1-905-821-1429

assaabloyai.com