


Rockwood 2848

Automatic Flush Bolt

With Bottom Fire Bolt for Metal Doors

Experience a safer
and more open world

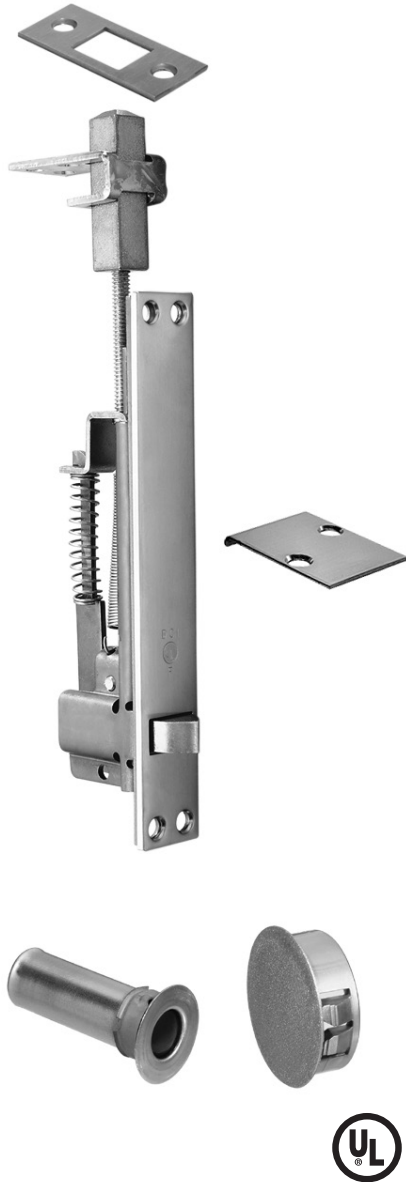

SPECIFICATIONS:

MATERIAL:

Brass, Stainless Steel

NOTE: There are ferrous and non-ferrous components within the material composition of the product.

FASTENERS:

10 ea. #8 x 3/4" Flat Head Combo Screws, 4 ea. Plastic Anchors.

FEATURES:

- Non-handed
- Low (5 lbs. maximum) closing force
- Fully automatic; opening active door retracts top bolt
- Override feature prevents damage to doors or bolt if bolt head is blocked from entering strike
- Bolt head rod is adjustable up to 1 1/2"
- For fire rated metal doors labeled A, B, C, D, & E up to 4'w x 9'h
- Thermal lock automatically locks the inactive door under high heat conditions due to fire
- Bottom fire bolt eliminates need for floor prep
- Oversize fire bolt strike hole allows for slight door misalignment
- UL Listed

AVAILABLE FINISHES:

- US3/605
- US4/606
- US10/612
- 10BE/613E
- US32/629
- US32D/630
- BSP (Black Suede Powder Coat)
- WSP (White Suede Powder Coat)
- BPC (Black Powder Coat)
- FBPC (Flat Black Powder Coat)

Size:

Top Bolt: 1" x 6 3/4"

Bottom Bolt: Ø 13/16"

Weight: 1.3 lbs.

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Copyright © 2019-2025, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.