


Rockwood 215

Tapered Door Pull

Experience a safer
and more open world

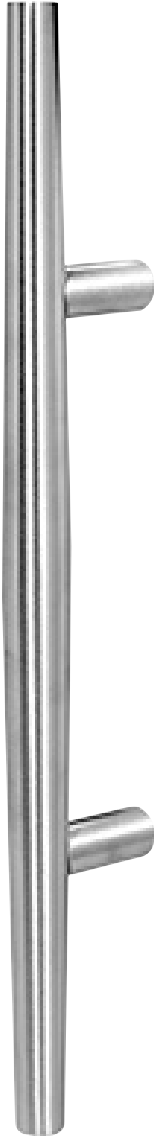

SPECIFICATIONS:

MATERIAL:

Aluminum, Brass, Bronze,
Stainless Steel

FASTENER:

1/4"-20 x 2 1/4" thru bolt & finish
washer (standard 1 3/4" door)

MOUNTING NOTES:

1, 5, 6, 8, 12, 13, 15

OPTIONS:

- Use Y prefix (Y215) when ordering pulls with base plates, Y plate diameter is 1 1/16"; recommended for use on glass or wood doors.
- Back to back mounting – use BTB suffix (215BTB) when ordering two pulls back to back.
- Advise if door thickness is other than 1 3/4".

AVAILABLE FINISHES:

- US3/605
- US4/606
- US10/612
- US10B/613
- 10BE/613E
- US26/625
- US26D/626
- US28/628
- US32/629
- US32D/630
- US32DMS
- 313/710
- 315/711
- BPC (Black Powder Coat)
- BSP (Black Suede Powder Coat)
- WPC (White Powder Coat)
- WSP (White Suede Powder Coat)
- FBPC (Flat Black Powder Coat)
- RPC (Red Powder Coat)
- Stock Powder Coats
- OptiCoat™

Material Size: 1" dia.

CTC: 8"

Overall: 16"

Base: 3/4" dia.

Projection: 2 1/2"

Clearance: 1 1/2"

Weight: 3.5 lbs.

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Rockwood is a brand associated with ASSA ABLOY Accessories and Door Controls Group, Inc.
Copyright © 2019-2026, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.