


# Rockwood 70C-RKW

## Push Plate - .050" Thick

Experience a safer  
and more open world

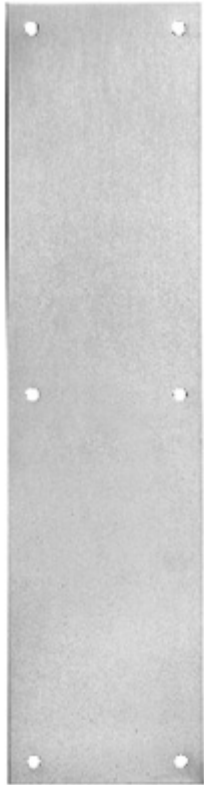

### SPECIFICATIONS:

#### MATERIAL:

Aluminum, Brass, Bronze, or  
Stainless Steel.


#### FASTENER:

#6 x 5/8" Oval Head Sheet  
Metal Screws

#### FEATURES:

Four beveled edges

#### OPTIONS:

- Custom sizes available upon request.
- TEK - self-drilling screws.
- TORX - security Torx screws.
- SA - self-adhesive mounting: 1/16" double face foam tape (no screw holes on plate).
- Engraving on plates 4" wide or wider. Specify copy.
- Cylinder cutouts (CFC) and turn knob cutouts (CFTT).
- Heavy bevel available on 70A to 70G, specify HVBEV.
- Optional UL Listed
  - UL listed for 3 hours  for use on hollow-metal, steel-covered Composite fire doors.
  - UL listed for 90 minutes for use on plastic-covered Composite, wood-covered Composite fire doors.

### AVAILABLE FINISHES:

- US28/628
- US3/605
- US4/606
- US10/612
- US10B/613
- 10BE/613E
- US26/625
- US26D/626
- US32D/630
- US32/629
- US32DMS
- US32D316
- US32MS
- BSP (Black Suede Powder Coat)
- WSP (White Suede Powder Coat)
- BPC (Black Powder Coat)
- FBPC (Flat Black Powder Coat)
- WPC (White Powder Coat)
- RPC (Red Powder Coat)
- Stock Powder Coats

**Standard Size:** 4" x 16"

**Weight:** 1.0 lbs.

### ORDERING:

Specify plate number followed by size designation and finish (70C-RKW US32D) or for non-standard size 70.

Specify width x height and finish.  
Specify any additional options.

Rockwood Manufacturing Company  
300 Main St.  
Rockwood, PA 15557  
www.rockwoodmfg.com  
1 800 458 2424