

PEMKOHINGE® CONTINUOUS GEARED HINGES:

Full-Mortise Hinges

Short Leaf Inset

FM_SLI



LISTED
DOOR HINGE
76Y2

BHMA
CERTIFIED

AVAILABLE FINISHES: **C, D, G, BSP, WSP, SN**

WIDTH: **5/16" (7.9 mm)**

(between frame edge and door edge)

CAP WIDTH: **25/32" (19.8 mm)**

HEIGHT: **1 11/16" (42.9 mm)**

(to flange/frame edge side)

HEIGHT: **1 19/32" (40.5 mm)**

(to flange/door edge side)

HEIGHT: **1 1/16" (17.5 mm)**

(frame edge flange to top of cap)

C (Clear Anodized)


D (Dark Bronze Anodized)

G (Gold Powder Coat)

BSP (Black Suede Powder Coat)

WSP (White Suede Powder Coat)

SN (Satin Nickel Powder Coat)

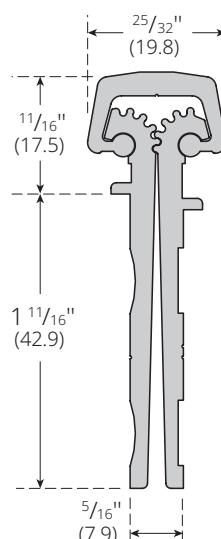

Experience a safer
and more open world

TITLE:

PREPARED FOR:

PREPARED BY:

DATE:

COMMENTS: