

PEMKOHINGE® CONTINUOUS GEARED HINGES:

Special Full Mortise Short Leaf Flush, 3" Bearing Space, Continuous Geared HD Hinge

SPFM_SLF_



LISTED
DOOR HINGE
76Y2

BHMA
CERTIFIED

AVAILABLE FINISHES:
C, D, G, SN, BSP, WSP, 10BE

WIDTH: **5/16" (7.9 mm)**
(between frame edge and door edge)

CAP WIDTH: **25/32" (19.8 mm)**

HEIGHT: **1 1/4" (31.8 mm)**
(to flange/frame edge side)

HEIGHT: **23/32" (18.3 mm)**
(frame edge side flange to top of cap)

C (Clear Anodized)

G (Gold Powder Coat)


BSP (Black Suede Powder Coat)

WSP (White Suede Powder Coat)

D (Dark Bronze Anodized)

SN (Satin Nickel Powder Coat)

10BE (Satin Bronze Powder Coat)

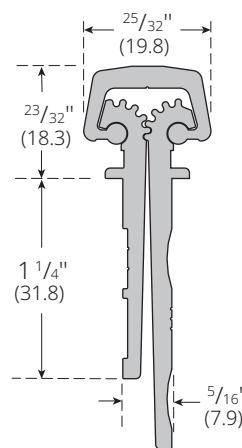

Experience a safer
and more open world

TITLE:

PREPARED FOR:

PREPARED BY:

DATE:

COMMENTS: