

PEMKOHINGE® CONTINUOUS GEARED HINGES:

Special Full Mortise Short Leaf Inset,
3" Bearing Space, Continuous Geared HD Hinge

Experience a safer
and more open world

SPFM_SLI_



LISTED
DOOR HINGE
76Y2



AVAILABLE FINISHES:
C, D, G, SN, BSP, WSP, 10BE

WIDTH: $\frac{5}{16}$ " (7.9 mm)
(between frame edge and door edge)

CAP WIDTH: $\frac{25}{32}$ " (19.8 mm)

HEIGHT: $1\frac{1}{4}$ " (31.8 mm)
(to flange/frame edge side)

HEIGHT: $\frac{23}{32}$ " (18.3 mm)
(frame edge side flange to top of cap)

C (Clear Anodized)

G (Gold Powder Coat)


BSP (Black Suede Powder Coat)

WSP (White Suede Powder Coat)

D (Dark Bronze Anodized)

SN (Satin Nickel Powder Coat)

10BE (Satin Bronze Powder Coat)

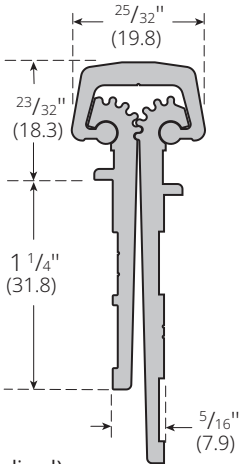

TITLE:
PREPARED FOR:
PREPARED BY:
DATE:
COMMENTS: