

Architectural Door Accessories

ASSA ABLOY

Pemko Commercial Threshold


The global leader in
door opening solutions

Applies to the following products:

**1842_S, 1842_PK, 290_SSTOP,
290_PKSTOP**

Installation Instructions:

1. Carefully trim to fit within the stops of frame opening.
2. Trim seal 1/16" longer than trimmed stop at each end.
3. Position against door to assure proper seal (not too tight).
4. Fasten to threshold with #10 x 3/4" flat head self tapping machine screws.

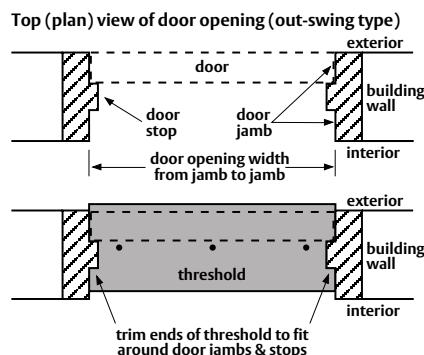

Testing/Ratings:

Gasketing material for fire doors intended for application to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes.

(Thresholds may or may not contain gasketing material).



 Barrier-free with 1/4" saddle only.

Tools Required:



www.pemko.com

MEMPHIS, TN USA VENTURA, CA USA
P: 800 824-3018 P: 800 283-9988
F: 800 243-3656 F: 800 283-4050

VANCOUVER, BC CA TORONTO, ON CA
P: 877 535-7888 P: 877 535-7888
F: 877 535-7444 F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.