

PEMKOHINGE® CONTINUOUS GEARED HINGES:

Full-Mortise

Safety Hinges: Short Leaf Inset

Experience a safer
and more open world

FM_SLISF

AVAILABLE FINISHES: **C, D, G, SN, BSP and WSP**

WIDTH: **$13/16$ " (20.6 mm)**

(between frame edge and door edge,
square edge door applications)

WIDTH: **$27/32$ " (21.4 mm)**

(between frame edge and door edge,
beveled edge door applications)

CAP WIDTH: **$25/32$ " (19.8 mm)**

HEIGHT: **$2 \frac{3}{8}$ " (60.3 mm)**

(to top cap/frame edge & door edge sides)

HEIGHT: **$1 \frac{1}{2}$ " (38.1 mm)**

(frame edge side - leaf)

HEIGHT: **$1 \frac{19}{32}$ " (40.5 mm)**

(to flange/door edge side - leaf)


C (Clear Anodized)

D (Dark Bronze Anodized)

G (Gold Powder Coat)

SN (Satin Nickel Powder Coat)

BSP (Black Suede Powder Coat) **WSP** (White Suede Powder Coat)

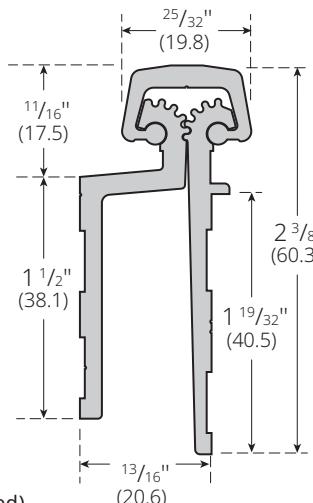

TITLE:	
PREPARED FOR:	
PREPARED BY:	
DATE:	
COMMENTS:	