


Experience a safer  
and more open world

## Rockwood Panic Device PDU8000 (No Mating Pull)

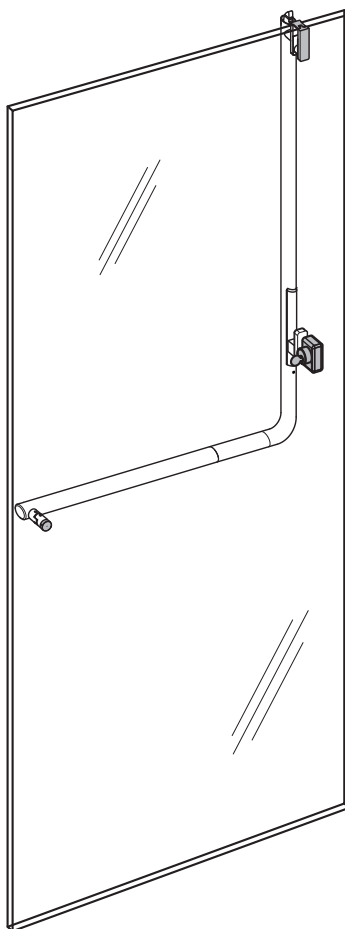

### Specifications:

#### MATERIAL:

Stainless Steel

#### FUNCTIONS:

- Keyed
- Passage - dogging standard or security.

#### GLASS THICKNESS:

- $\frac{1}{2}$ " to  $\frac{3}{4}$ " thick standard.
- Non-standard thickness, specify.

#### APPLICATIONS:

- Glass mounted
- Rail mounted

#### HANDING:

- Right-hand reverse (swing 3)
- Left-hand reverse (swing 4)

#### OPTION:

Bent end return on panic free end

#### Certifications:

ANSI/BHMA A156.3-2020 (32 and 32D finishes only)  
UL305 (2017)  
CAN/ULC-S132 (2016)  
California Building Code (2019) Sec. 11B-309.4  
ADA Compliant  
A156.41 (2020)  
IBC Sec. 1010.1.9.6 (2021)  
A156.3-2020 1000lb Security Test  
ANSI/BHMA A156.44-2021

### Available Finishes:

- US32/629
- US32D/630
- US32316
- US32D316
- US32DMS
- US32MS
- US32D (device)/  
US32 (push area)
- 314E
- 4E
- 10BE/Stock  
Powder Coats

Engraved  
PUSH Area Finish  
Options:

- Black
- White
- Less Paint
- Custom Color

#### DIMENSIONS:

Grip:  $\varnothing$  1  $\frac{1}{4}$ "

Vertical (crash bar  
to top of tube): 28  
 $\frac{1}{2}$ " min; Max per  
GANA guidelines

Horizontal: 15  $\frac{3}{4}$ "  
min; 48" max

Projection:  
2  $\frac{5}{8}$ " Panic side;  
3  $\frac{1}{4}$ " Mating pull  
side

Sold Through:



Authorized Channel Partner  
ASSA ABLOY

ASSA ABLOY Opening Solutions  
Glass Solutions  
Rockwood, PA  
P: 855.594.6989 • F: 844.851.8665  
www.assaabloyglass.us  
Orders.GlassSolutions@assaabloy.com • TechSupport.GlassSolutions@assaabloy.com

ASSA ABLOY Door Security Solutions  
Vaughan, ON L4K 4T9  
P: 800.461.3007  
www.assaabloydss.ca