





Architectural Door Accessories

ASSA ABLOY

Pemko SHS 80/6 Sliding Door Hardware

The global leader in
door opening solutions

Door Leaf Capacity - 176 lbs

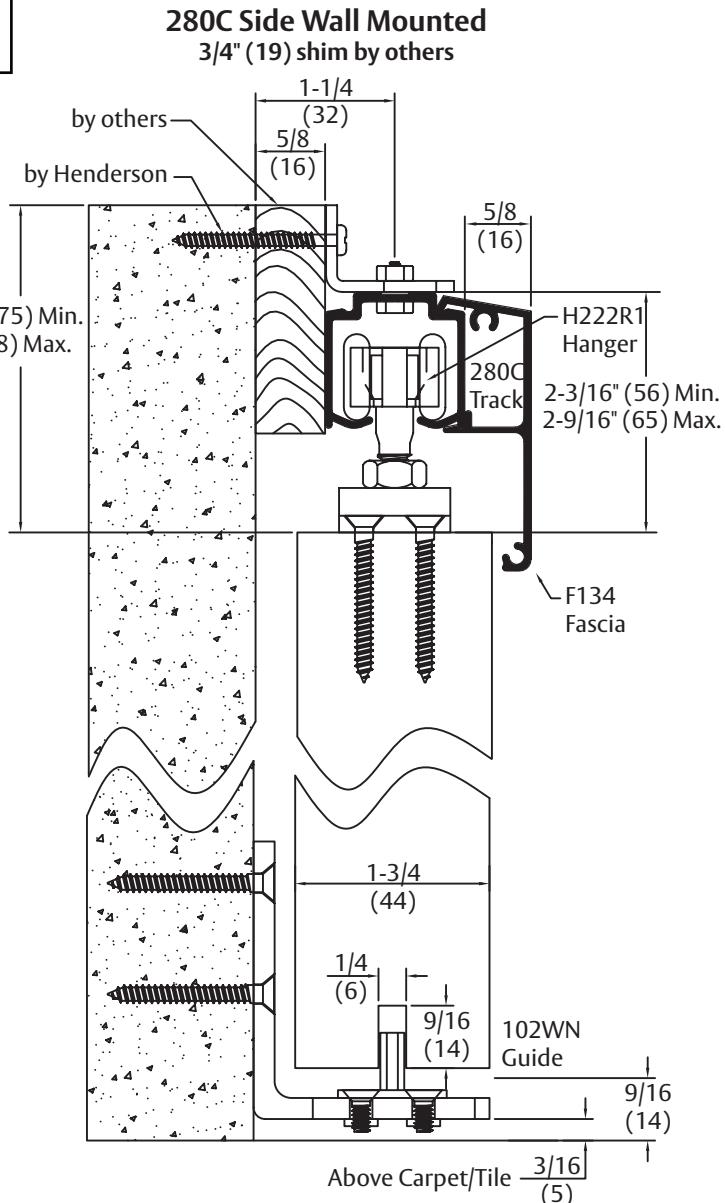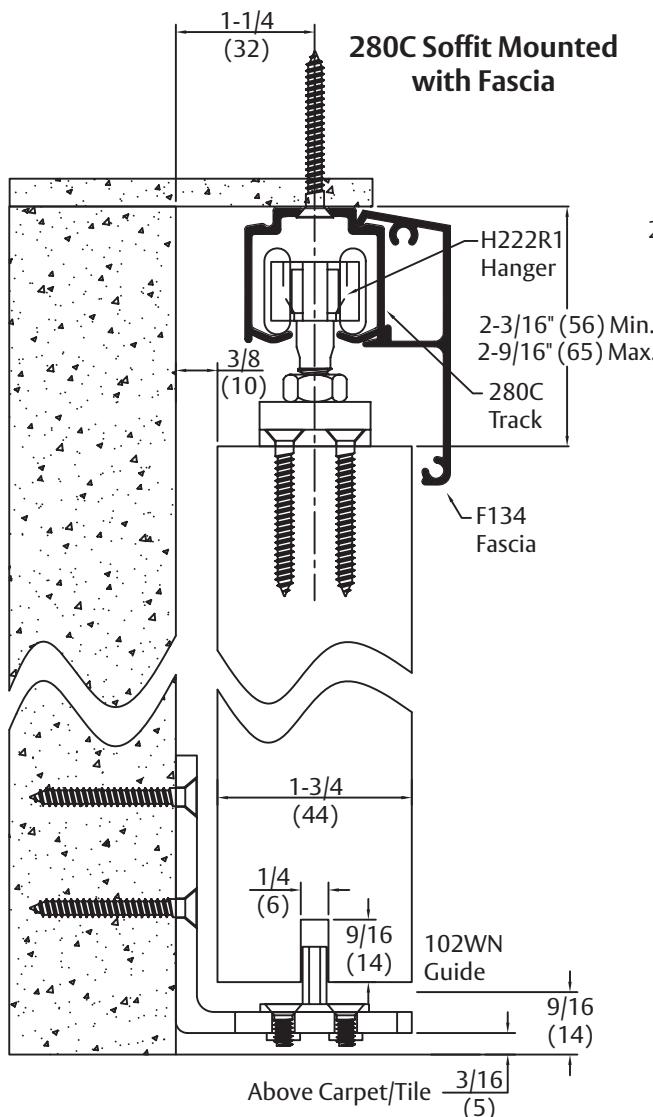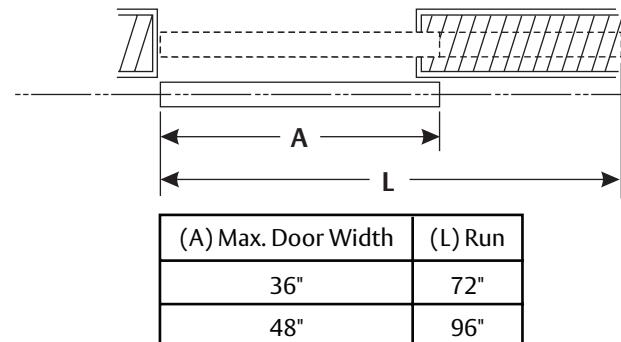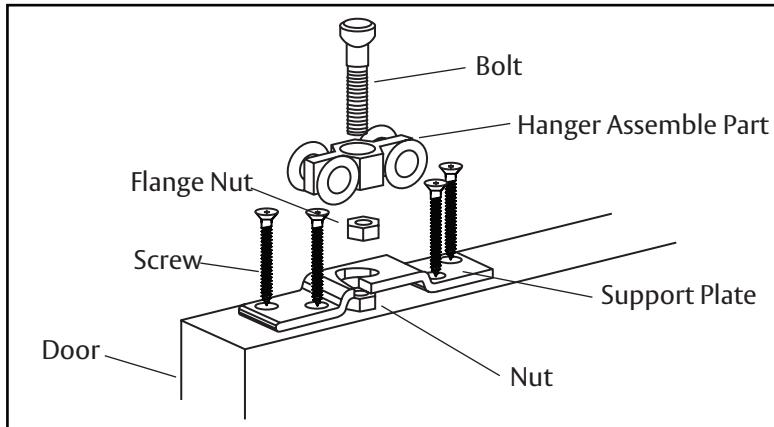


ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA ABLOY


1. Assemble hanger.

If using soft close device, use taller hanger bolt.



2. Fit hanger apron to door panel.


Drill $1/2"$ (13) dia x $1\frac{1}{2}"$ (38) deep hole 5" (127) from door edge to centerline and centered in door thickness.

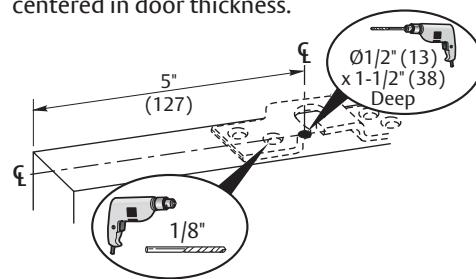

3. Insert hangers.


Ensure that hanger flange is pointing in direction of clip portion of stop as shown.

NOTE: If not using soft close, hanger will have shorter hanger bolt.

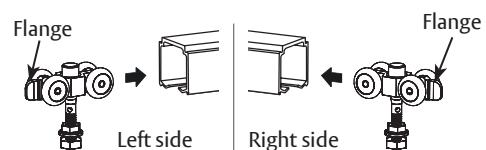


4. Face & Soffit Fix Options.

Use one bracket or fastener at each end of track and no more than 3' in between.

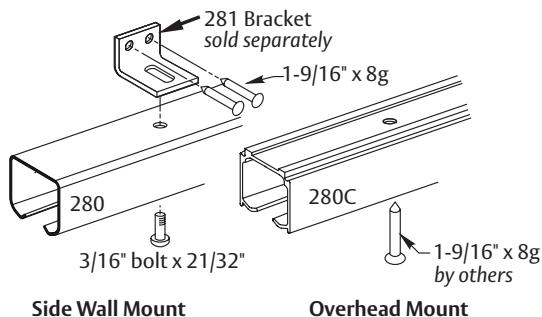


5. Attach door panel and adjust until level.


If using soft close device, refer to provided installation instructions beginning with step 3.

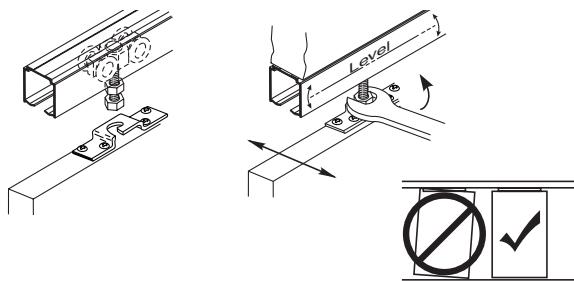

8. Assemble guide.




9. Mortise door and fit door guide.

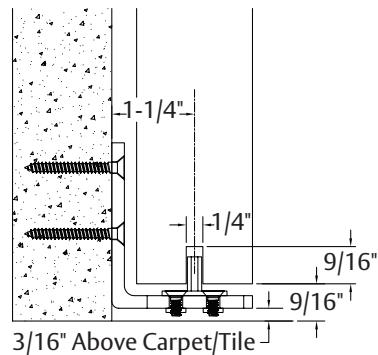

10. Install and secure retaining stops.

If using soft close device, do not install retaining stops.



www.assaabloydooraccessories.us

USA:

Ventura, CA 93003
Phone: 800.283.9988

Memphis, TN 38141
Phone: 800.824.3018

Canada:

Vancouver, BC V2T6W3
Phone: 877.535.7888

Toronto, ON L4K4T9
Phone: 877.535.7888