

# ROCKWOOD

## Locking Pull System

**ROCKWOOD®**  
**ASSA ABLOY**

Experience a safer  
and more open world

LOCKING PULL SYSTEM



SIMPLE, DURABLE,  
BEAUTIFUL DESIGN  
FOR SWINGING AND  
SLIDING DOORS

The Rockwood Locking Pull System  
integrates a contemporary Post  
Mount or GeoMetek style door pull  
with deadbolt or flat latch locking.  
Engineered for smooth operation,  
the locking pull is manufactured to  
ensure strength and durability with  
clean appealing lines.



Unsurpassed  
Craftsmanship

## FEATURES

- Key operated from outside; turn piece on inside
- Cylinder options: Rim Cylinder, Small format interchangeable core housing: 7-pin (SFIC) less core and key (Standard), Small format interchangeable core housing with plastic construction core: 7-pin (SFIC), Customer Supplied Cylinder, Dummy Cylinder, or Privacy Function: keyless locking function
- Door types:  $\frac{3}{8}$ " -  $\frac{7}{8}$ " thick glass,  $1\frac{3}{8}$ " -  $2\frac{1}{2}$ " thick aluminum, hollow metal or wood doors
- Multiple locking options: floor, head or both
- Standard bolt latch
  - Bolt location: 2" from face of door to centerline of bolt
  - Bolt has  $\frac{13}{16}$ " travel with fine adjustment
- Patent pending flat latch option
  - Flat latch location:  $2\frac{1}{8}$ " from face of door to centerline of latch
- Horizontal push/pull bar option
- Designed to Suite with Rockwood architectural door pulls and accessories
- Dummy versions available

## BENEFITS

- Cylinder and thumbturn location eliminates physical strain when locking and unlocking
- Glass door applications secure the opening and allow for more natural light
- Flat security latch option provides additional engagement with strike
- Simple door preparation allows for faster installation
- Suites with popular Rockwood door pulls, CORBIN RUSSWIN and SARGENT lever handles, McKinney hinges, creating a continuum of design
- Offers flexibility in custom sizes for a variety of applications



## AESTHETIC OPTIONS



### POSTMOUNT

#### LP3301 Series



PostMount - This basic post mounted pull is a clean and simple design. The simplicity adds contemporary beauty to standard entrance doors.



#### LP3401 Series

GripZone - This beautiful bright and brushed two-tone finish provides a "wear" area for gripping the pull. This minimizes the appearance of small scratches caused by rings and keys.



#### LP6061 Series

English Bridle Leather Wrapped - Authentic J & E Sedgwick & Co. Ltd. bridle leather imported from Walsall, England is hand sewn by a talented craftsman. Typically used for saddles and equestrian products, this smooth durable leather is suitable for both interior and exterior applications.



#### LP6161 Series

Upholstery Leather Wrapped - Supple yet durable leather makes a discriminating statement. Paired with the PostMount Locking Pull, this glove soft leather will add a level of sophistication to your interior.

### GEOMETEK



#### LP7901 Series

GeoMetek - This series offers a streamlined profile and crisp lines. The square pull complements the shape of the opening creating symmetrically balanced design.



#### LP6440 Series

Upholstery Leather Wrapped - Beautifully crafted, the GeoMetek and Upholstery Leather combination produces an elegant composition. The leather is tightly wrapped and neatly sewn on the back and is offered in a plethora of custom colors.

The Locking Pull System was designed to suite with Rockwood Architectural door pulls, and accessories. In addition, complementary hardware is available through Corbin Russwin, Pemko products, McKinney products, and SARGENT.



McKinney two knuckle hinge with flat tips



Leather wrapped lever from Corbin Russwin and Sargent



Rockwood leather door pull



Rockwood coat hook (left) and door stop (right)



Rockwood leather cabinet pull



McKinney square barrel hinge



Square lever and rose from Corbin Russwin and Sargent



Rockwood door pull



Rockwood coat hook (left) and door stop (right)



Square lever with return and rose from Corbin Russwin and Sargent



### the good design studio

The Good Design Studio – your resource for beautiful doors,

frames and hardware from ASSA ABLOY Group brands.

Visit [www.thegooddesignstudio.com](http://www.thegooddesignstudio.com) to learn more.

## MODEL OPTIONS

LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440




### Full Height Pull - Single and Dual Bolt Models

FHD (Full Height Down) - Bolts Down


FHU (Full Height Up) - Bolts Up

FHB (Full Height Both) - Bolts Up and Down

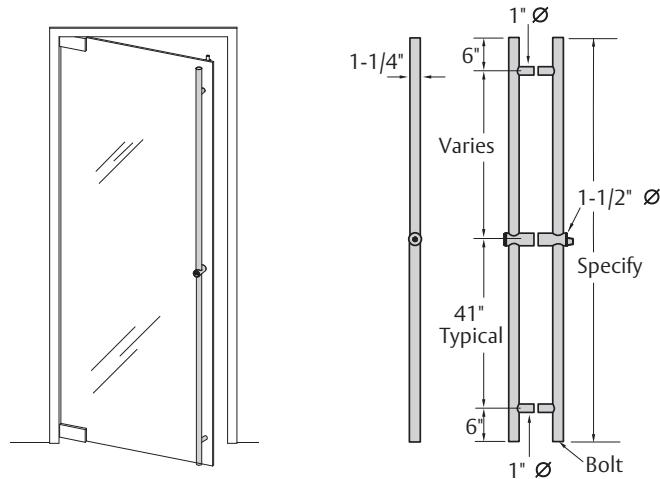


### Half Height Pull - Bolts Up

DBU (Dead Bolt Up)

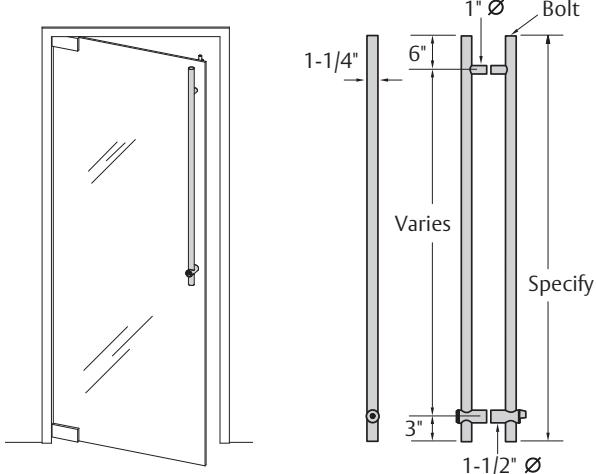

### Half Height Pull - Bolts Down

DBD (Dead Bolt Down)

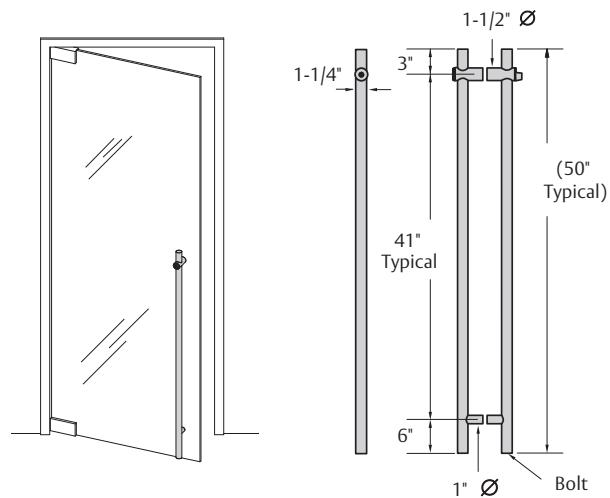

#### Notes:

1. Pulls are available in various sizes to fit job conditions. For ADA requirements, cylinder must be located 34" to 48" above finished floor.
2. Minimum clearance from pull to finished floor is  $\frac{3}{8}$ " at factory settings.




### Clearance and Full Height Pull – Single and Dual Bolt Models

FHD (Full Height Down) – Bolts Down


FHU (Full Height Up) – Bolts Up

FHB (Full Height Both) – Bolts Up and Down

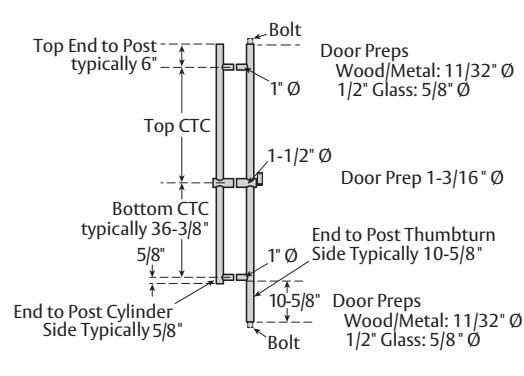

### Clearance and Half Height Pull – Bolts Down

DBD (Dead Bolt Down)

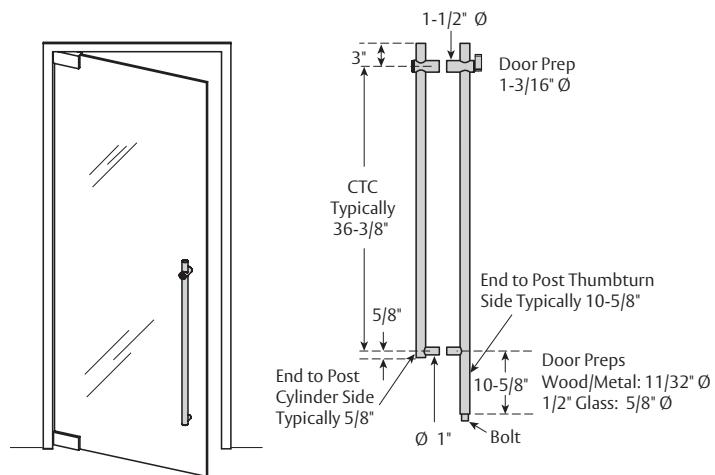

## MODEL OPTIONS


FL3301



### Flat Latch Locking Pull

### Half Height Pull - Latch Up


DBU (Dead Bolt Up)

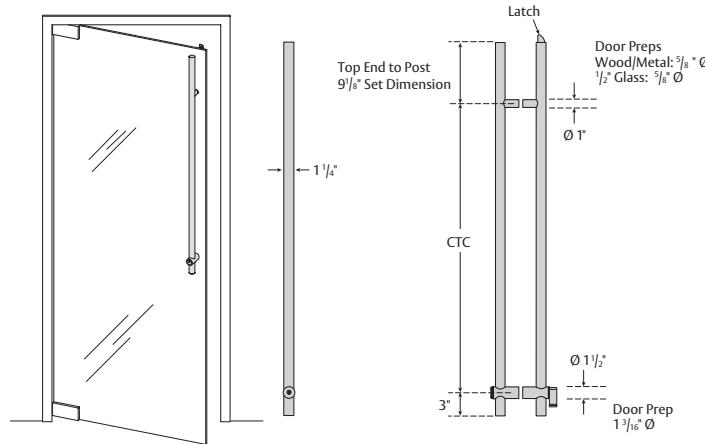

### Flat Latch Locking Pull



### Full Height Pull - Latch Up

FHU (Full Height Up) - Bolts Up

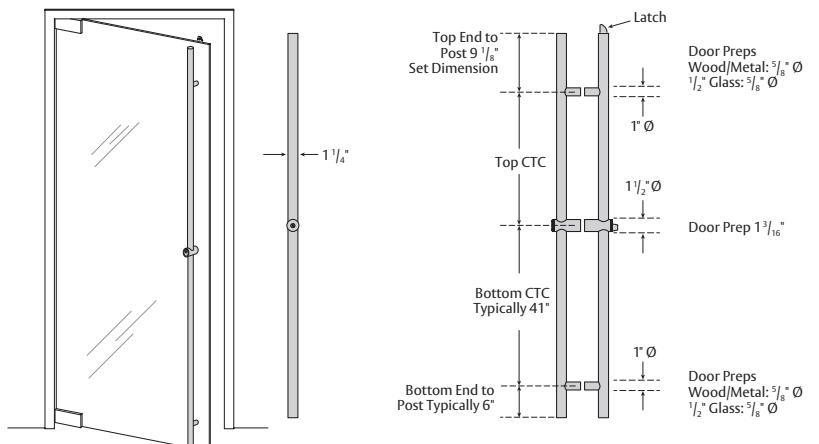



## Flat Latch Locking Pull Half Height Pull - Latch Up

DBU (Dead Bolt Up)

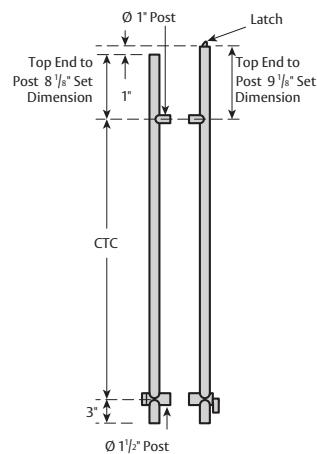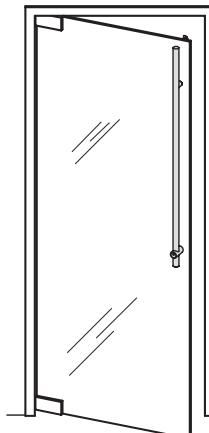

## Flat Latch Locking Pull Full Height Pull - Latch Up

FHU (Full Height Up) - Bolts Up

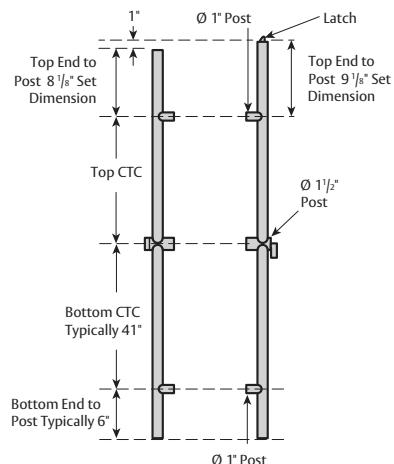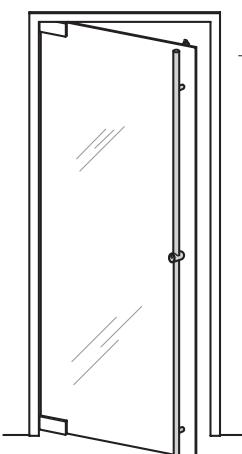

# HORIZONTAL PUSH/PULL BAR



## Features

- Horizontal push/pull bar option for locking pull system
- PostMount or bent end design offered
- Available for half height DBD and DBU, and full height FHU models only\*
  - Bar options - single sided (thumbturn or cylinder side only) and double sided (bar on both sides)
- Offered on glass, aluminum, hollow metal or wood doors


## Benefits

- Keeps glass clean and free of hand prints
- Provides greater push/pull area while maintaining clean aesthetic
- Contemporary design that suites with popular Rockwood door pulls and architectural panic devices

\*Not offered on GeoMetek square style locking pull (LP7901 and LP6440)

## HORIZONTAL PUSH/PULL BAR

### Single Sided (Thumbturn or Cylinder)

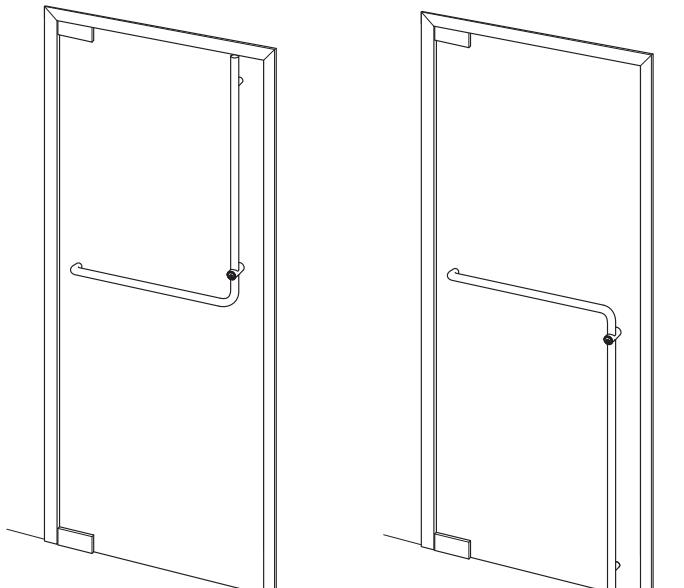

DBU (Dead Bolt Up)  
FHU (Full Height Up)


DBD (Dead Bolt Down)



Post Mount



### Double Sided

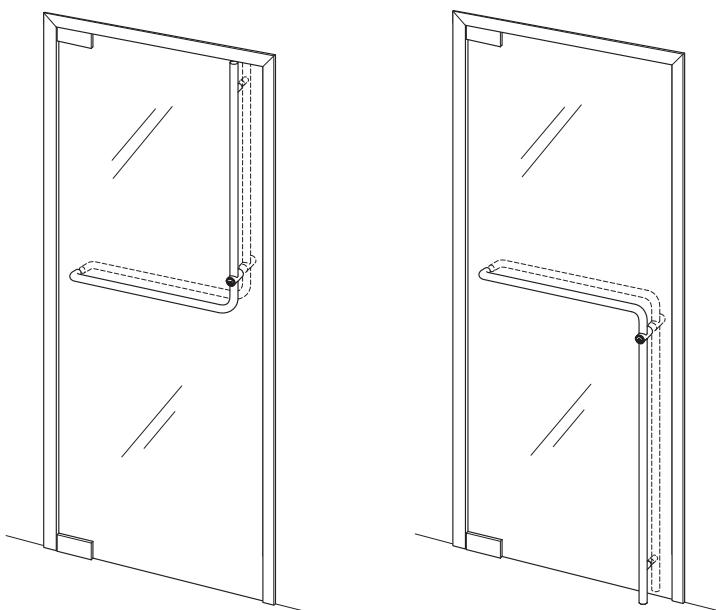

DBU (Dead Bolt Up)


DBD (Dead Bolt Down)



## APPLICATION DETAILS


Glass doors  
LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440

### Location from Door

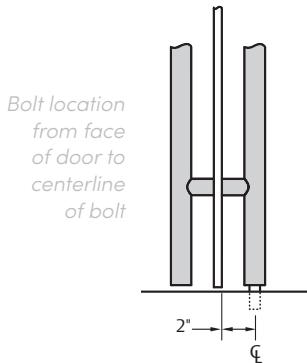

All glass door applications include a bushing and washer to insulate the glass from the pull. Sturdy fasteners securely attach the pull to the door making for a durable, trouble free installation. Simple glass prep requires two (or three) round holes.

### Bolt Adjustment

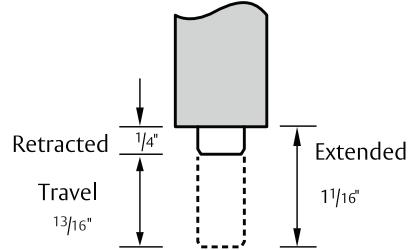



Adjusts  $\frac{1}{4}$ " in and out from the shown factory settings.

### Bolt into Floor Models - Detail at Floor

DBD - Half Height Pull- Bolts Down

FHD - Full Height Pull - Bolts Down

FHB - Full Height Pull - Bolts Up and Down

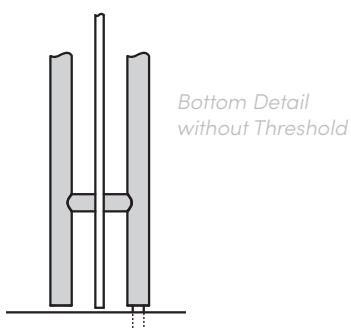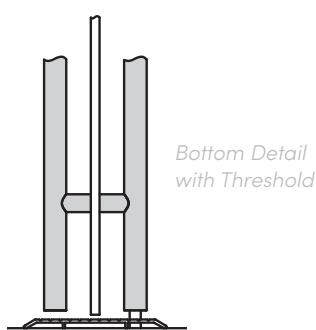


### Bolt into Head Models - Detail at Head

DBU - Half Height Pull- Bolts Up

FHU - Full Height Pull - Bolts Up

FHB - Full Height Pull - Bolts Up and Down

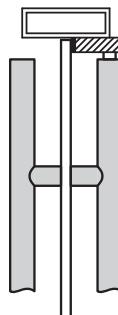


Head Detail with Surface Strike  
Typical configuration shown

## APPLICATION DETAILS


Aluminum, wood and hollow metal doors  
LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440

### Location from Door

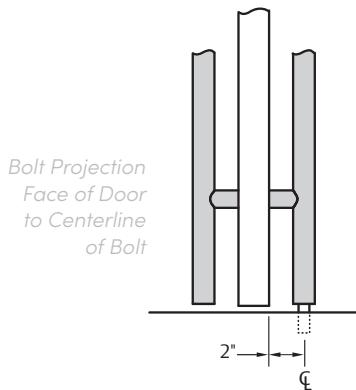

Locking pulls are available for  
1 $\frac{3}{8}$ " to 2 $\frac{1}{2}$ " thick aluminum, wood  
or hollow metal doors.

### Bolt Adjustment

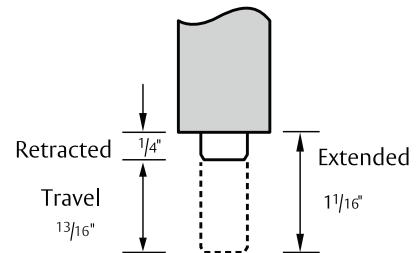



Adjusts  $\frac{1}{4}$ " in and out from the  
shown factory settings.

### Bolt into Floor Models - Detail at Floor

DBD - Half Height Pull- Bolts Down

FHD - Full Height Pull - Bolts Down

FHB - Full Height Pull - Bolts Up and Down

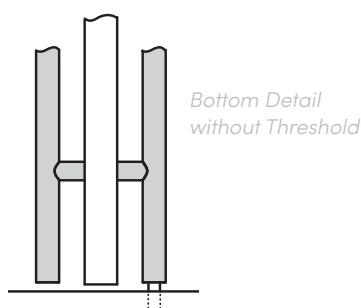
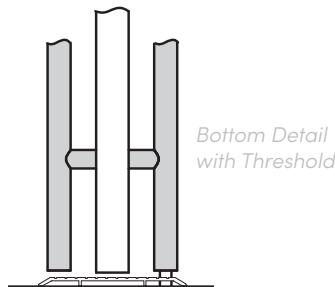


### Bolt into Head Models - Detail at Head

DBU - Half Height Pull- Bolts Up

FHU - Full Height Pull - Bolts Up

FHB - Full Height Pull - Bolts Up and Down

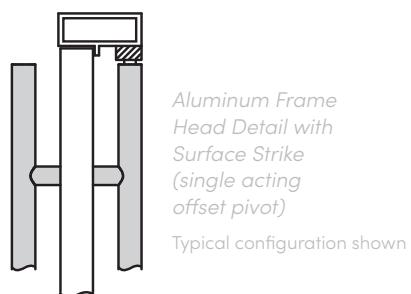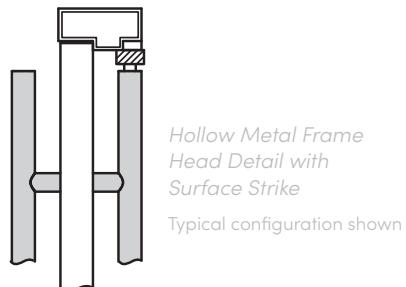

## APPLICATION DETAILS

Aluminum, wood and hollow metal doors  
LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440




### Holes Sizes Required

#### Glass Door

- End Posts:  $5/8"$   $\varnothing$   
for  $1/2"$  glass thickness
- Lock Housing:  $1\frac{3}{16}"$   $\varnothing$

#### Aluminum, Wood, Hollow Metal Doors:

- End Posts:  $1\frac{1}{32}"$   $\varnothing$
- Lock Housing:  $1\frac{3}{16}"$   $\varnothing$

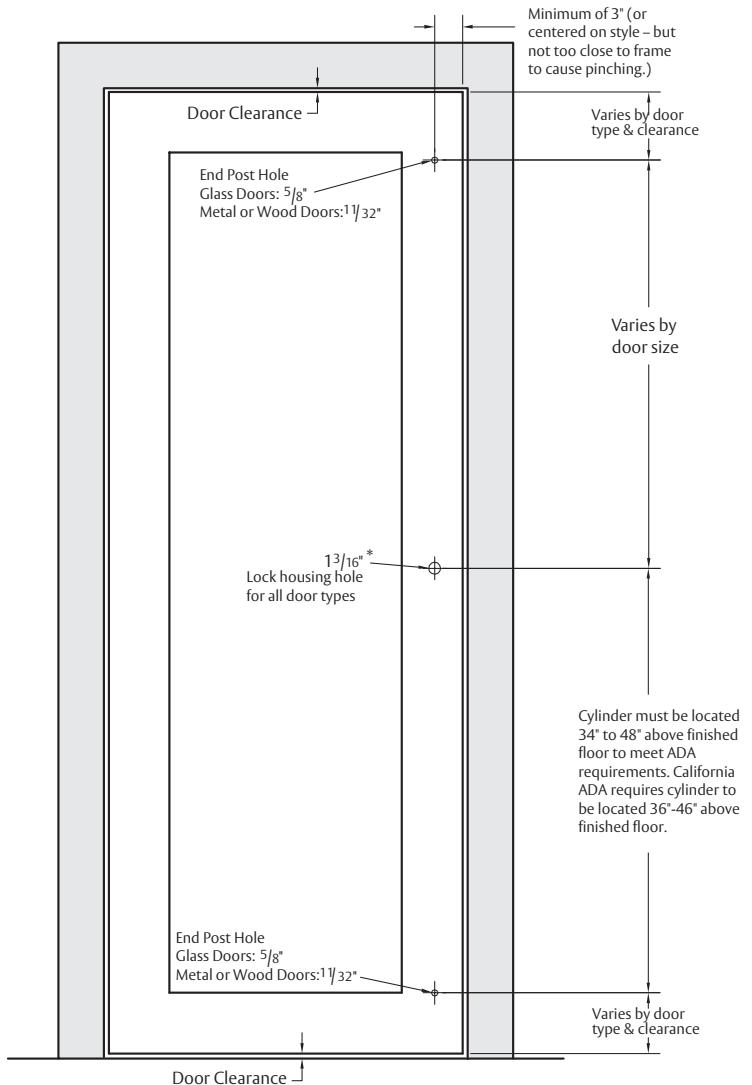

#### Notes:

1. Only drill the holes required for the model you are installing.
2. Only full height locking pulls require all three holes.

## APPLICATION DETAILS

Installation reference  
FL3301

### Holes Sizes Required


|   |  |
|---|--|
| Glass Door  | Aluminum, Wood,<br>Hollow Metal Doors:         |
| • End Posts: $5/8"$ $\varnothing$<br>for $1/2"$ glass thickness | • End Posts: $5/8"$ $\varnothing$              |
| • Lock Housing: $1\frac{3}{16}"$ $\varnothing$                  | • Lock Housing: $1\frac{3}{16}"$ $\varnothing$ |

### Hollow Metal Frame Requirements:

**Stop Height:**  $5/8"$ . This will shift the top of the device down on the door when compared to an aluminum frame.

**Stop Width:** Minimum of 3" wide.

**Reinforcement:** Minimum 12 gauge closer reinforcement along the stop width in the area that the strike will be attached.

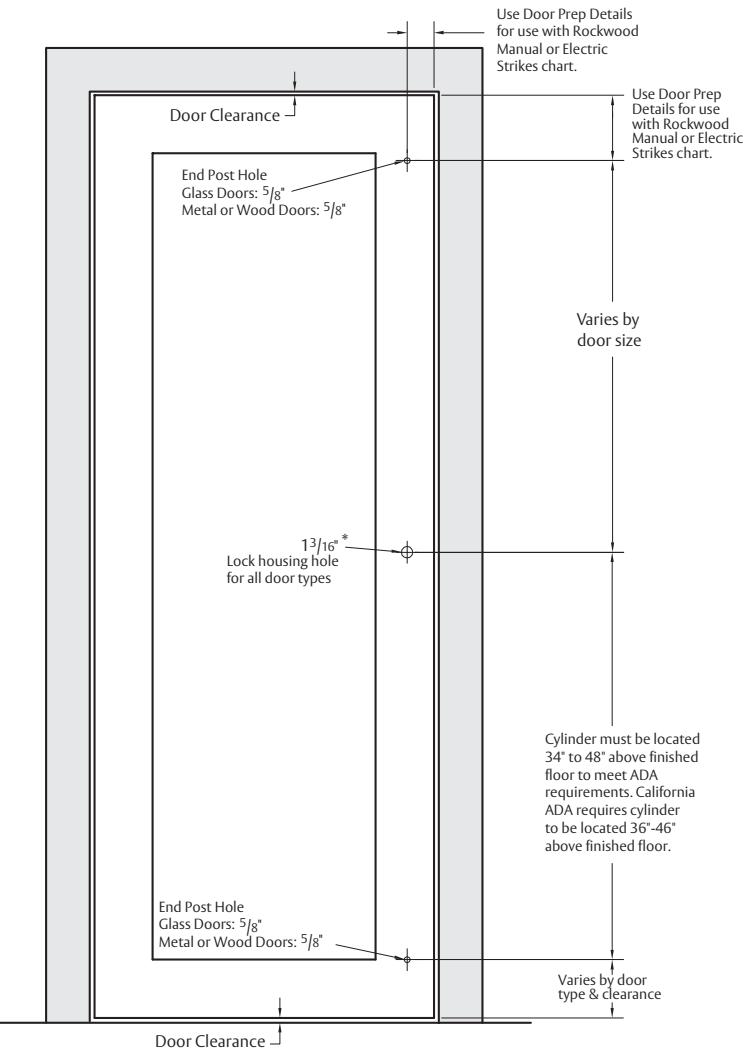

### Prep Suggestions

#### Door Prep Details for use with Rockwood Manual or Electric Strikes

| Door Type                             | Back Set               |                 |                 |                 |                 |                 |
|---------------------------------------|------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                       | Top Down to First Hole | Back Set        | Wide Stile      | Medium Stile    | Single Door     | Double Door     |
| Glass                                 | $9\frac{7}{8}"$        | $4\frac{1}{8}"$ |                 |                 |                 |                 |
| Storefront (removable/no stop)        | $9\frac{7}{8}"$        |                 | $4\frac{1}{8}"$ | $2\frac{1}{4}"$ |                 |                 |
| Wood/Hollow Metal (removable/no stop) | $9\frac{7}{8}"$        |                 |                 |                 | $5\frac{1}{8}"$ | $4\frac{1}{8}"$ |
| Wood/Hollow Metal ( $5/8"$ Stop)      | $10\frac{1}{2}"$       |                 |                 |                 | $5\frac{1}{8}"$ | $4\frac{1}{8}"$ |

Assuming 1/8" Top Door Gap. Not available on Narrow Stile Doors, Medium Stile Doors that are Single LHR with Electric Strike, Glass Door with 10" Top Rail, or Inswing Doors. For best product alignment, the door should be prepped at the door manufacturer.

# APPLICATION DETAILS

Installation reference  
INSFL3301


## Holes Sizes Required

### Glass Door

- End Posts:  $5/8"$   $\varnothing$  for  $1/2"$  glass thickness
- Lock Housing:  $1\frac{3}{16}"$   $\varnothing$

Aluminum, Wood,  
Hollow Metal Doors:

- End Posts:  $5/8"$   $\varnothing$
- Lock Housing:  $1\frac{3}{16}"$   $\varnothing$

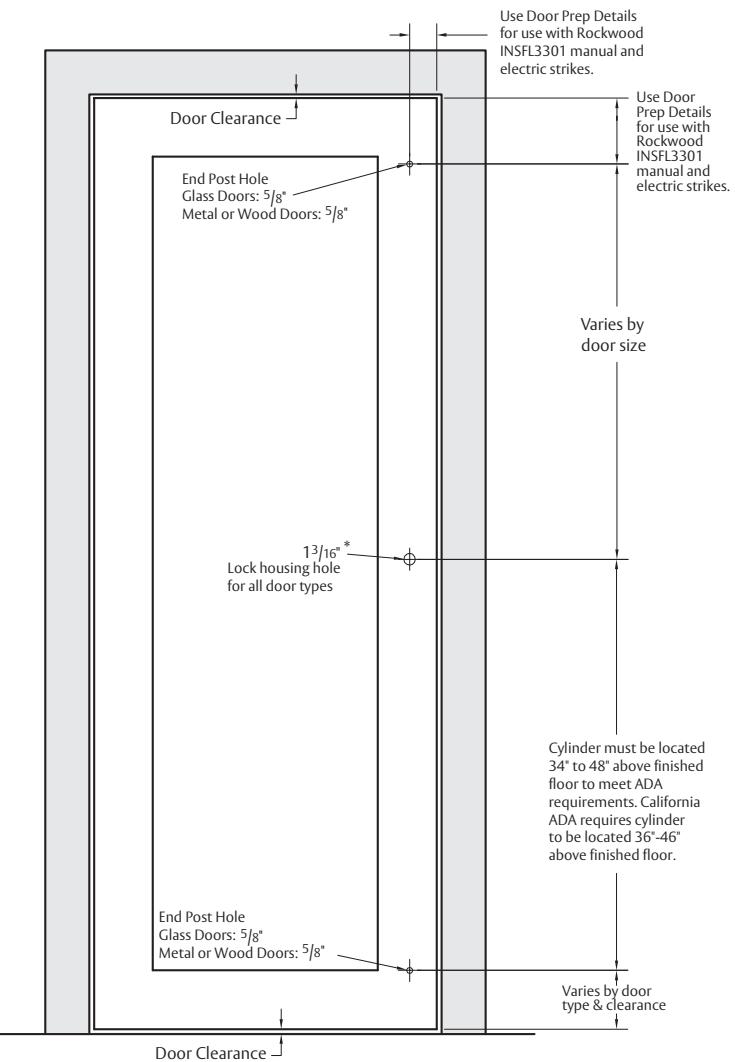

## Hollow Metal Frame Requirements:

**Reinforcement:** Minimum 12 gauge closer reinforcement along the stop width in the area that the strike will be attached.

## Prep Suggestions

### Door Prep Details for use with Rockwood Manual or Electric Strikes

| Door Type                             | Back Set                                   |                  |                  |                  |                  |                  |
|---------------------------------------|--|------------------|------------------|------------------|------------------|------------------|
|                                       | Top of Door to Centerline of Top Hole Prep | Back Set         | Wide Stile       | Medium Stile     | Single Door      | Double Door      |
| Glass                                 | 9 $\frac{1}{8}"$                           | 4 $\frac{1}{8}"$ |                  |                  |                  |                  |
| Storefront (removable/no stop)        | 9 $\frac{1}{8}"$                           |                  | 4 $\frac{1}{8}"$ | 2 $\frac{1}{4}"$ |                  |                  |
| Wood/Hollow Metal (removable/no stop) | 9 $\frac{1}{8}"$                           |                  |                  |                  | 5 $\frac{1}{8}"$ | 4 $\frac{1}{8}"$ |

Assuming  $1/8"$  Top Door Gap. Not available on Narrow Stile Doors, Glass Door with 10" Top Rail, or Outswing Doors.

For best product alignment, the door should be prepped at the door manufacturer. If stop height is greater than 1" please consult factory.

## APPLICATION DETAILS

Strike options  
LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440

### Top Strike Options

Custom Strikes Available

LPS01



- $3/4" \times 1\frac{1}{2}'' \times 3"$

LPS02



- $3/4" \times 2\frac{1}{2}'' \times 3"$
- Rubber Stop

LPS03



- $1/20" \times 1\frac{1}{8}'' \times 2\frac{1}{4}''$

LPS04



- $1\frac{1}{4}'' \text{ dia.} \times 4\frac{1}{2}'' \text{ h}$

LPS05



- $1\frac{1}{4}'' \text{ sq.} \times 4\frac{1}{2}'' \text{ h}$

LPS06



- $2" \text{ dia}$

LPS07



- $2\frac{1}{2}''$

LPS12



- $3/4" \times 3"$
- Adjustable stops accommodating varying thicknesses and door types

### Bottom Strike Option

570



Dust Proof Strike

Face Plate:  $1\frac{3}{8}'' \times 2\frac{7}{8}''$

## APPLICATION DETAILS

FL3301

### Top Strike Options



Single Manual (MSK-SGL)  
Storefront, Metal, Wood, and Glass  
Backset: 2-1/4" or 4-1/8"



Double Manual (MSK-DBL)  
Storefront, Metal, Wood, and Glass  
Backset: 4-1/8"



Double Manual (MSK-MS-DBL)  
Storefront Backset: 2-1/4"



Single Electric (ESK-SGL)  
Storefront, Metal, Wood, and Glass  
Backset: 4-1/8"



Single Electric - Medium Stile  
(ESK-MS-SGL) Storefront  
Backset: 2-1/4"



Double Electric (ESK-DBL)  
Storefront, Metal, Wood, and Glass  
Backset: 4-1/8"



Double Electric - Medium Stile  
(ESK-MS-DBL) Storefront  
Backset: 2-1/4"



Single Electric (ESK-1600-SGL)  
Storefront, Metal, Wood, and Glass



Double Electric (ESK-1600-DBL)  
Storefront, Metal, Wood, and Glass

INSFL3301



### Top Strike Options



Single Electric (INSFL-1600)  
Storefront, Metal, Wood, Glass



Single Manual (INSFL-MSK)  
Storefront, Metal, Wood, Glass

## APPLICATION DETAILS

LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440

| Series*  | Description                              |
|----------|--|
| LP3301   | Plain PostMount                          |
| LP3305** | Plain PostMount Clearance                |
| LP3401   | PostMount GripZone                       |
| LP6061   | PostMount English Bridle Leather Wrapped |
| LP6161   | PostMount Upholstery Leather Wrapped     |
| LP7901   | Plain GeoMetek                           |
| LP6440   | GeoMetek Upholstery Leather Wrapped      |

\* Specify "DP" in front of series number for dummy locking pull. Example: DP3301

\*\*LP3305 is not available with DBU.

| Push Bar Suffix* | Description                               |
|------------------|---|
| BEPT             | Bent End Horizontal Bar - Thumturn Side   |
| BEPC             | Bent End Horizontal Bar - Cylinder Side   |
| BEPB             | Bent End Horizontal Bar - Both Sides      |
| PMPT             | Post Mount Horizontal Bar - Thumturn Side |
| PMPC             | Post Mount Horizontal Bar - Cylinder Side |
| PMPB             | Post Mount Horizontal Bar - Both Sides    |

\* Available on DBD, DBU, and FHU models only. Not offered with LP7901 or LP6440. Order form must be filled out.

| Suffix | Description                    |
|--------|--------------------------------|
| DBD    | Half Height, Bolts Down        |
| DBU    | Half Height, Bolts Up          |
| FHD    | Full Height, Bolts, Down       |
| FHU    | Full Height, Bolts Up          |
| FHB    | Full Height, Bolts Up and Down |

| Options                    | Code* |
|----------------------------|-------|
| Large Thumturn             | ADA   |
| Thumturn Only, No Cylinder | TT    |
| Custom Engraving           | CE    |

\*Specify code after suffix

| Cylinder Options  | Code |
|---|------|
| Rim Cylinder  | 01   |
| Small format interchangeable core housing, 7-pin (SFIC) Standard                        | 02   |
| Small format interchangeable core housing, with plastic construction core, 7-pin (SFIC) | 03   |
| Supplied cylinder   | 05   |
| Dummy cylinder  | 07   |
| 7 Pin SFIC Housing with ASSA ABLOY ACCENTRA™ (formerly Yale Commercial) Core            | 09   |



For a quick and efficient ordering process, use the order forms on [rockwoodmfg.com](http://rockwoodmfg.com) (Resource Library > Order Forms > Rockwood Products).

Order form must be filled out and submitted to: [orders.rockwood@assaabloy.com](mailto:orders.rockwood@assaabloy.com)

## ORDERING INFORMATION

LP3301, LP3305, LP3401, LP6061, LP6161, LP7901, LP6440

### PostMount Finishes:

|  |      |           |
|--|------|-----------|
| Polished Brass                             | 605  | (US3)     |
| Satin Brass                                | 606  | (US4)     |
| Satin Oxidized Oil Rubbed                  | 613  | (US10B)   |
| Satin Oxidized Clear Coated                | 614  | (US10BL)  |
| Dark Satin Bronze Equivalent               | 613E | (10BE)    |
| Polished Stainless Steel                   | 629  | (US32)    |
| Satin Stainless Steel                      | 630  | (US32D)   |
| Satin Stainless Steel with MicroShield®    | –    | (US32DMS) |
| Polished Stainless Steel with MicroShield® | –    | (US32MS)  |
| Black Suede Powder Coat                    | BSP  |           |
| White Suede Powder Coat                    | WSP  |           |
| Stock Powder Coats                         |      |           |

### GeoMetek Finishes:

|  |      |           |
|--|------|-----------|
| Dark Satin Bronze Equivalent               | 613E | (US10BE)  |
| Polished Stainless Steel                   | 629  | (US32)    |
| Satin Stainless Steel                      | 630  | (US32D)   |
| Satin Stainless Steel with MicroShield®    | –    | (US32DMS) |
| Polished Stainless Steel with MicroShield® | –    | (US32MS)  |
| Black Suede Powder Coat                    | BSP  |           |
| White Suede Powder Coat                    | WSP  |           |
| Stock Powder Coats                         |      |           |

### Leather Finish Standard Color Selections:

English Bridle Leather



B-LBRN  
(Light Brown)




B-BUR  
(Burgundy)



B-MBRN  
(Medium Brown)



B-DBRN  
(Dark Brown)



B-BLK  
(Black)

Upholstery Leather



U-DBRN  
(Dark Brown)



U-BLK  
(Black)

Custom colors available

### Accessories

(Ordered separately)

- LPS01 Top Strike
- LPS02 Top Strike
- LPS03 Top Strike
- LPS04 Transom Strike
- LPS05 Transom Strike
- LPS06 Mortised Header Strike
- LPS07 Top Strike
- LPS12 Top Strike
- 570 Dust Proof Bottom Strike
- RM850 Door Stop
- Custom Strikes for unique conditions
- ADA Thumbtturn



570 Dust Proof  
Bottom Strike



RM850 Door Stop

### Thumbtturns:



PostMount Thumbtturn  
(comes standard)



GeoMetek Thumbtturn  
(comes standard)



ADA Thumbtturn  
(PostMount only,  
ordered as a suffix)



The Agion antimicrobial is not intended as a substitute for good hygiene. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY makes no representations or warranties, express or implied, as to the efficacy of the Agion antimicrobial. A copy of the Agion warranty is available upon request. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA, USA

# ORDERING INFORMATION

FL3301, INSFL3301

| Series*   | Description   |
|-----------|---|
| FL3301    | Plain PostMount with Flat Latch and Dogging (Outswing Only) |
| INSFL3301 | Plain PostMount with Flat Latch and Dogging (Inswing Only)  |

| Suffix | Description           |
|--------|-----------------------|
| DBU    | Half Height, Bolts Up |
| FHU    | Full Height, Bolts Up |

| Push Bar | Description                               |
|----------|---|
| BEPT*    | Bent End Horizontal Bar - Thumturn Side   |
| BEPC     | Bent End Horizontal Bar - Cylinder Side   |
| BEPB     | Bent End Horizontal Bar - Both Sides      |
| PMPT     | Post Mount Horizontal Bar - Thumturn Side |
| PMPC     | Post Mount Horizontal Bar - Cylinder Side |
| PMPB*    | Post Mount Horizontal Bar - Both Sides    |

\* FL3301FHU only 2 push bar options.

## Finishes:

|  |     |           |
|--|-----|-----------|
| Polished Stainless Steel                   | 629 | (US32)    |
| Satin Stainless Steel                      | 630 | (US32D)   |
| Satin Stainless Steel with MicroShield®    | -   | (US32DMS) |
| Polished Stainless Steel with MicroShield® | -   | (US32MS)  |
| Dark Satin Bronze Equivalent               |     | (US10BE)  |
| Black Suede Powder Coat                    | BSP |           |
| White Suede Powder Coat                    | WSP |           |
| Stock Powder Coats                         |     |           |

## Accessories

(Ordered separately)

- Single Manual (MSK-SGL)  
Storefront, Metal, Wood, and Glass
- Double Manual (MSK-DBL)  
Storefront, Metal, Wood, and Glass
- Double Manual (MSK-MS-DBL) Storefront
- Single Electric (ESK-SGL)  
Storefront, Metal, Wood, and Glass
- Single Electric - Medium Stile (ESK-MS-SGL) Storefront
- Double Electric (ESK-DBL)  
Storefront, Metal, Wood, and Glass
- Double Electric - Medium Stile (ESK-MS-DBL) Storefront
- Single Electric (ESK-1600-SGL)  
Storefront, Metal, Wood, and Glass
- Double Electric (ESK-1600-DBL)  
Storefront, Metal, Wood, and Glass
- Manual Strike (INSFL-MSK)  
Storefront, Metal, Wood, and Glass (INSFL3301 ONLY)
- Electric Strike (INSFL-1600)  
Storefront, Metal, Wood, and Glass (INSFL3301 ONLY)

## Thumturns



ADA Thumturn  
is Standard

## Dogging

Requires 5/32" hex key



Device  
Dogged




Device  
Undogged

For a quick and efficient ordering process, use the order forms on [rockwoodmfg.com](http://rockwoodmfg.com)  
(Resource Library > Order Forms > Rockwood Products).

Order form must be filled out and submitted to: [orders.rockwood@assaabloy.com](mailto:orders.rockwood@assaabloy.com)

Contact your local ASSA ABLOY Door Security Solutions team for more  
information on our Locking Door Pull systems or other Rockwood products.

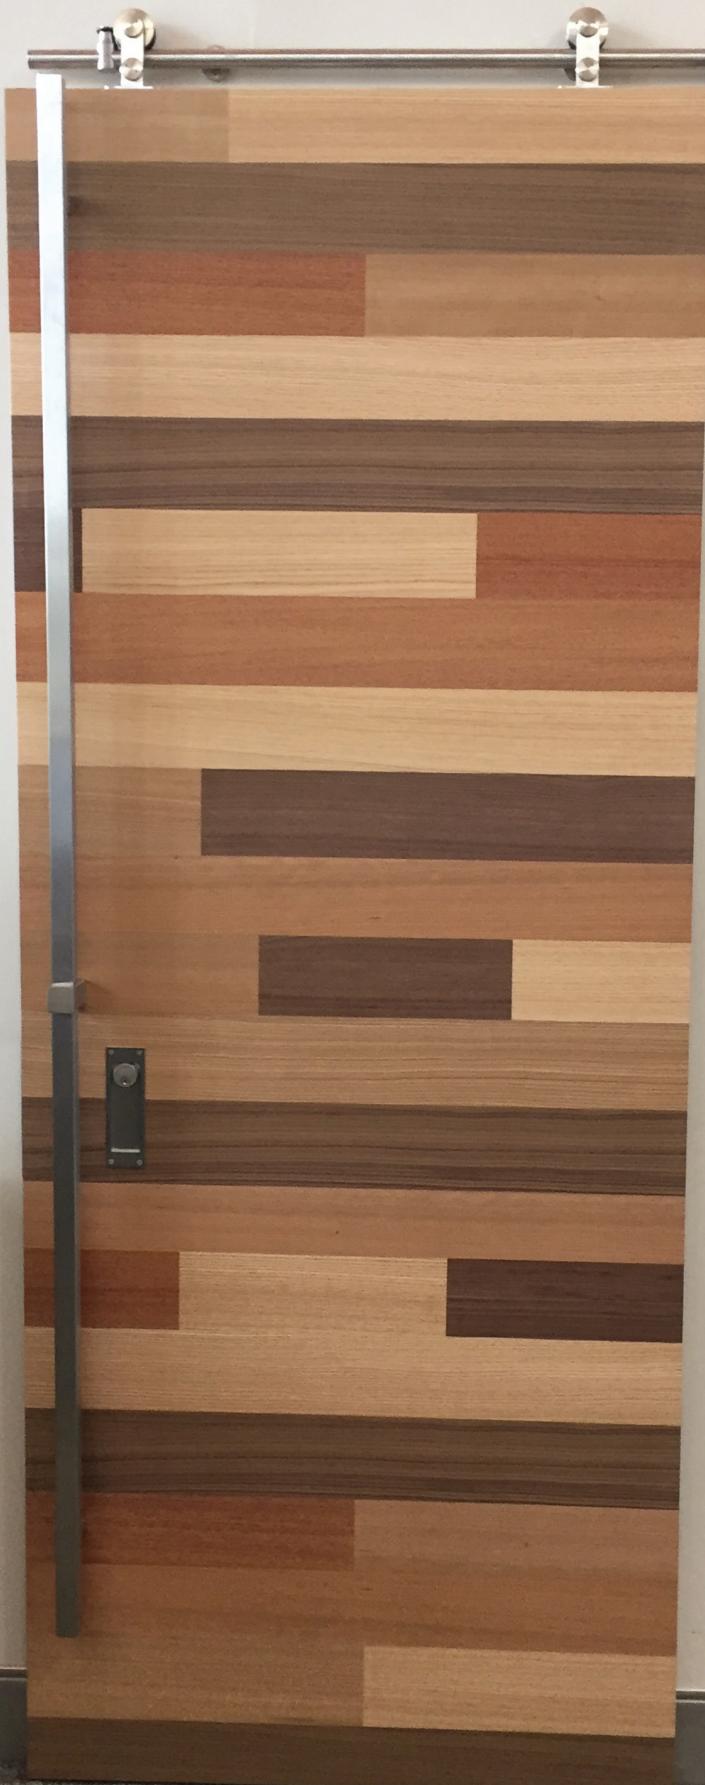

The ASSA ABLOY Group is the global leader in access solutions.  
Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

**ROCKWOOD**<sup>®</sup>

**ASSA ABLOY**

Rockwood Manufacturing Company  
300 Main St.  
Rockwood, PA 15557  
[www.rockwoodmfg.com](http://www.rockwoodmfg.com)  
[orders.rockwood@assaabloy.com](mailto:orders.rockwood@assaabloy.com)  
1 800 458 2424

ASSA ABLOY Opening Solutions  
Door Security Solutions Canada  
160 Four Valley Drive  
Vaughan, ON L4K 4T9  
[www.assaabloydss.ca](http://www.assaabloydss.ca)  
1 800 461 3007