
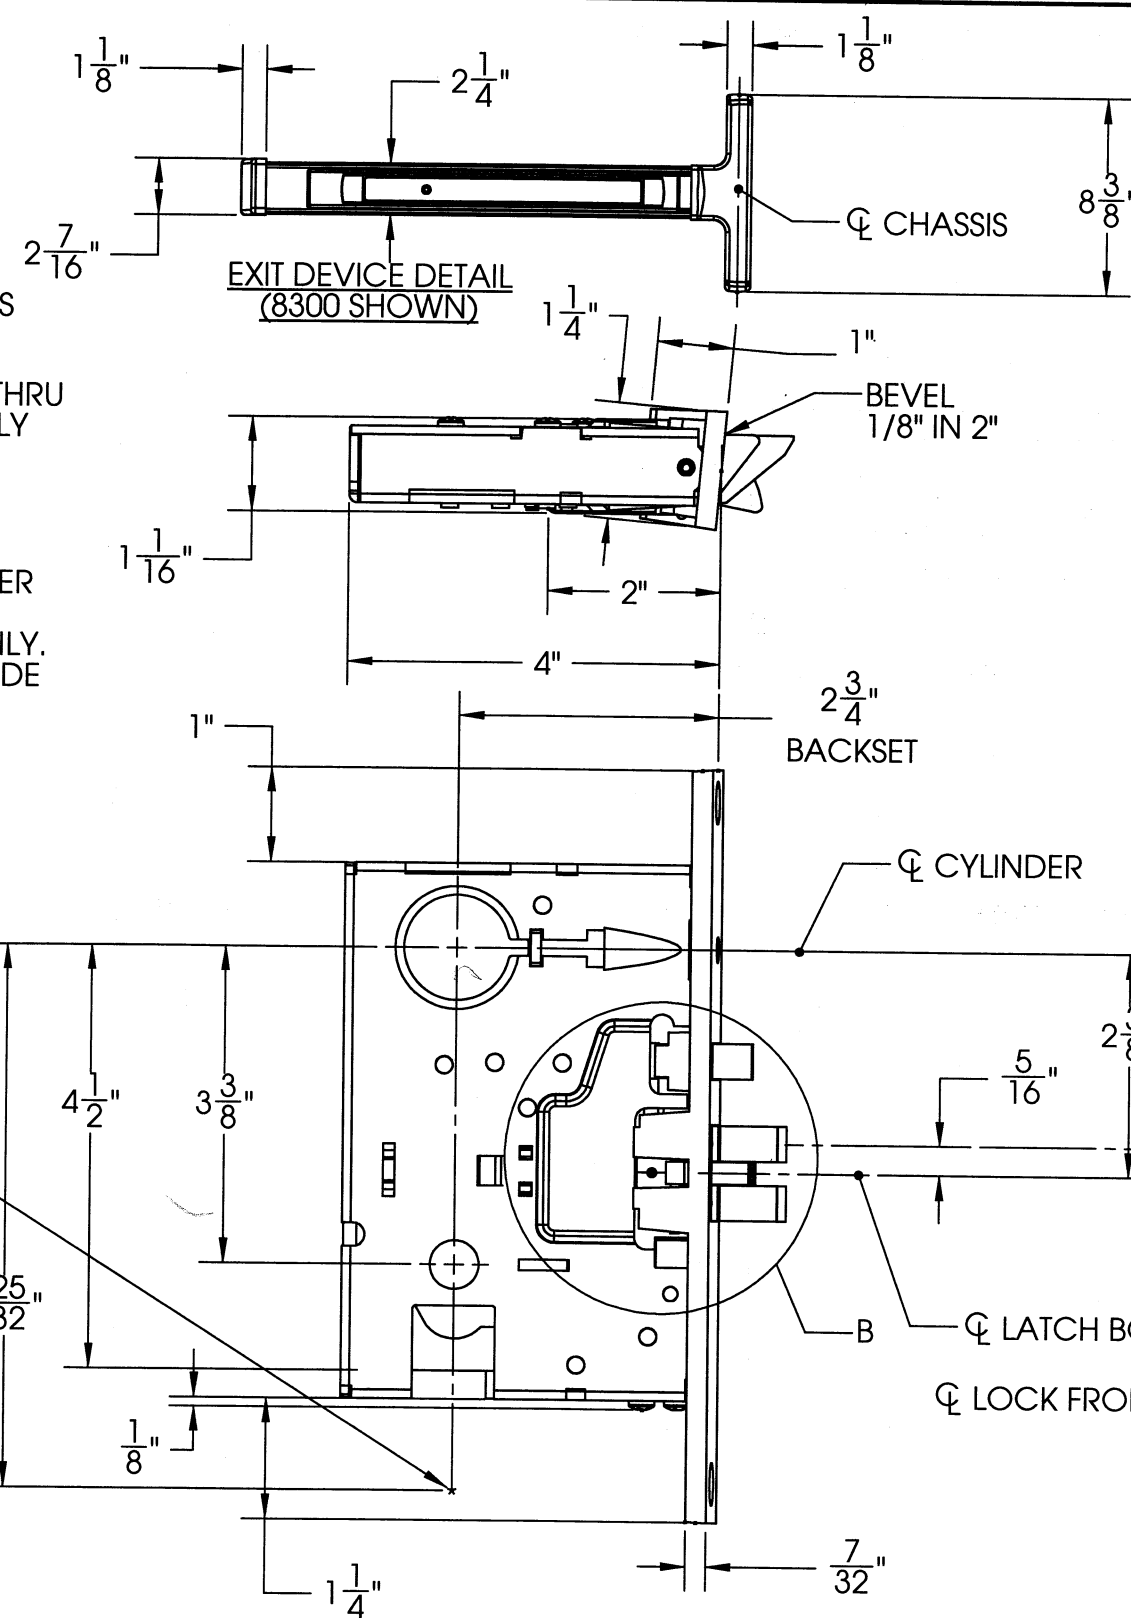


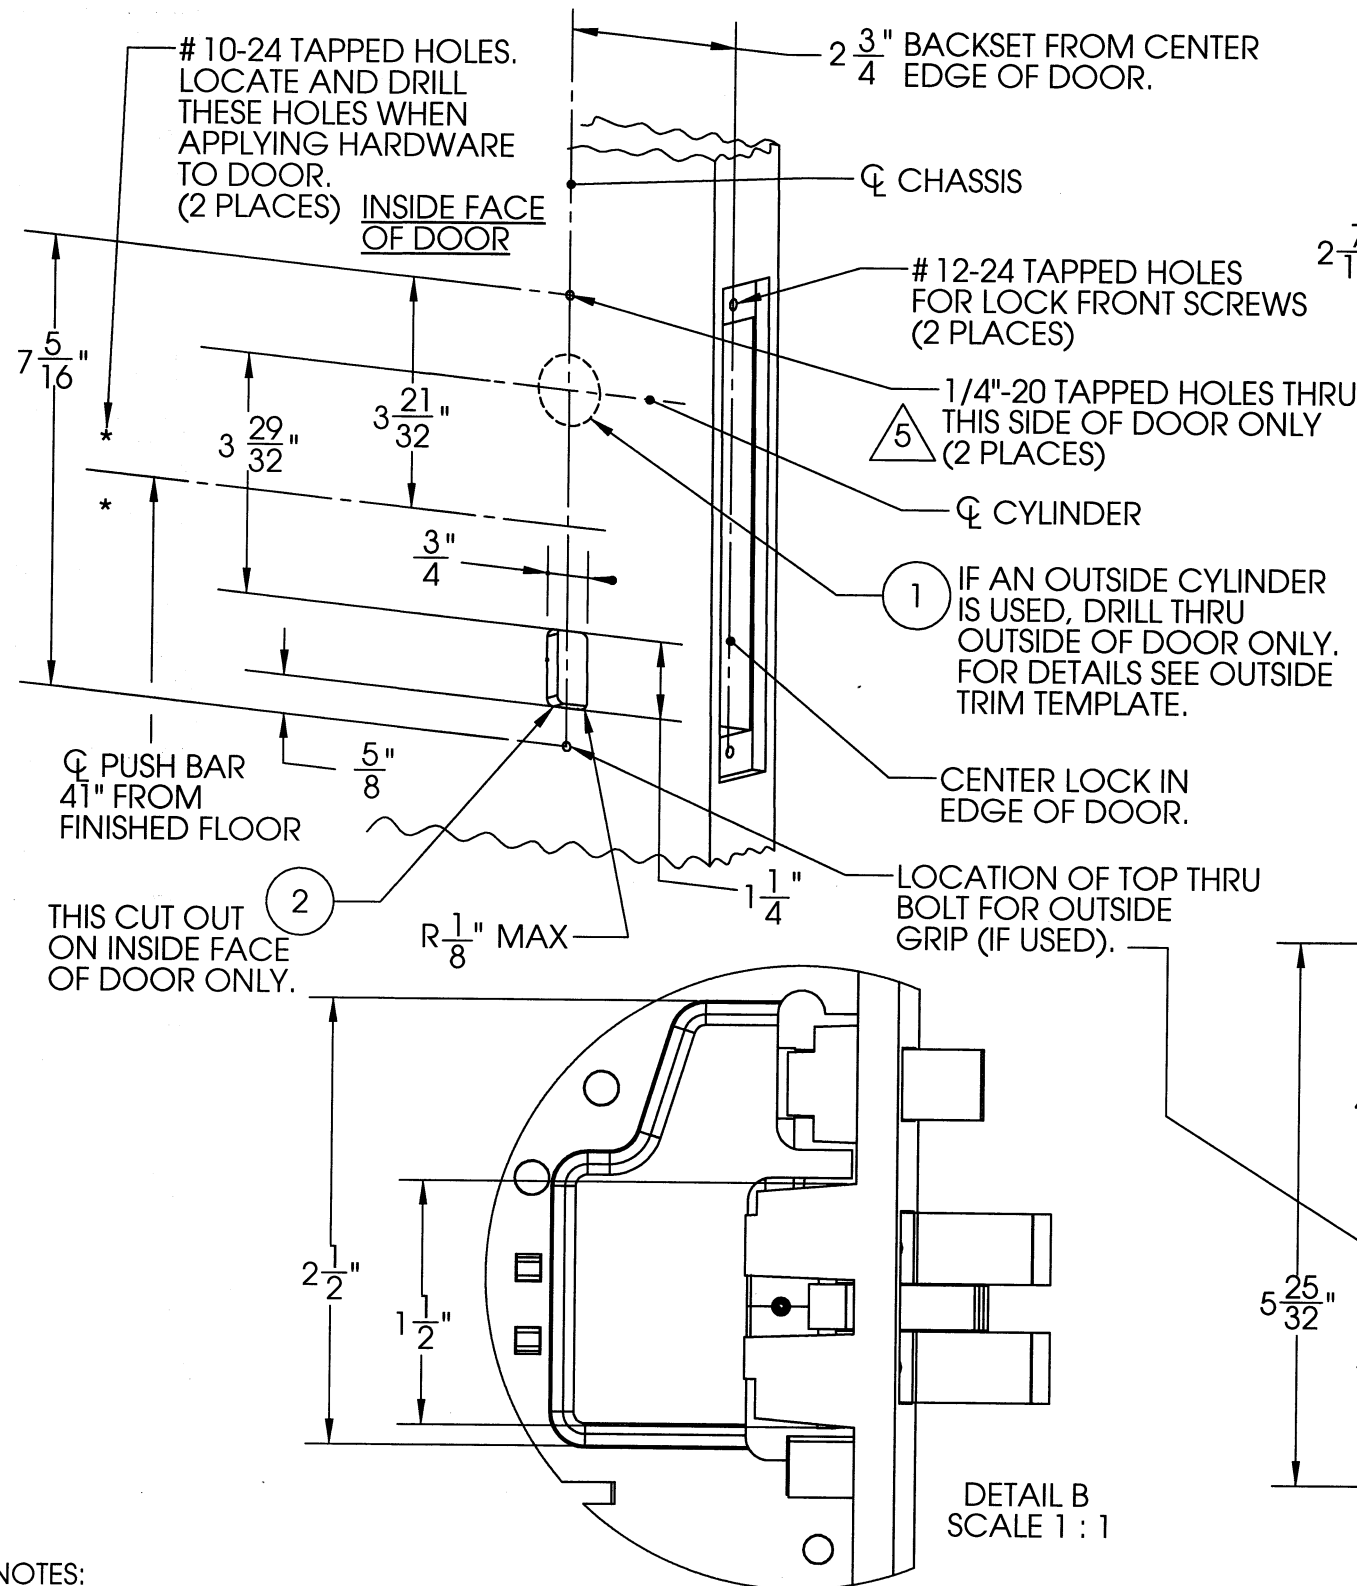

FUNCTION	CUT OUT REQUIRED	
	HOLE 1	HOLE 2
04	X	X
10		X
13	X	X
15		X
28		X
63	X	X
75	X	X
76	X	X

- NOTES:
1. TOLERANCE ON ALL FRACTIONAL DIMENSIONS $\pm 1/64$ ".
 2. SEE MASTER SHEET No. 4019 FOR AREAS REQUIRING REINFORCEMENTS.
 3. SEE STRIKE TEMPLATE No. 4192 FOR 815 AND No. 3908 FOR 908 STRIKES.
 4. SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED, MUST BE FLUSH.
 5. TO ASSURE COMPLETE RETRACTION OF THE LATCH BOLT WHEN THE PUSH BAR IS DEPRESSED, DO NOT DRILL AND TAP THESE HOLES UNTIL APPLYING EXIT DEVICE. APPLICATION INSTRUCTIONS PACKED WITH EACH EXIT DEVICE.

MORTISE LOCK DETAIL

SARGENT Manufacturing Company
100 Sargent Drive New Haven, CT 06511

TEMPLATE: 6300, 8300, 12-6300 & 12-8300
NARROW DESIGN MORTISE
LOCK EXIT DEVICE

RELEASE DATE
May 09
TEMPLATE NO.
4310 E