


EXIT DEVICE FUNCTION	CUT-OUT 1	CUT-OUT 2 INSIDE ONLY, 13/16 DEEP		
	THRU DOOR	DIM "A"	DIM "B"	DIM "C"
10 & 40	---	---	---	---
10 X SCREWLESS ROSE / INACTIVE TRIM (FOR EXISTING HARDWARE ONLY)	---	2 5/8	1 5/16	2 1/8
06, 13, 15, 43, 46, 73 & 74 X ET	---	2 5/8	1 5/16	2 1/8
06 OR 13 X PRK	Ø 1 3/8	2 5/8	1 5/16	2 1/8
28	---	3 1/8	1 3/8	1 1/2
62 OR 63	Ø 1 3/8	3 1/8	1 3/8	1 1/2

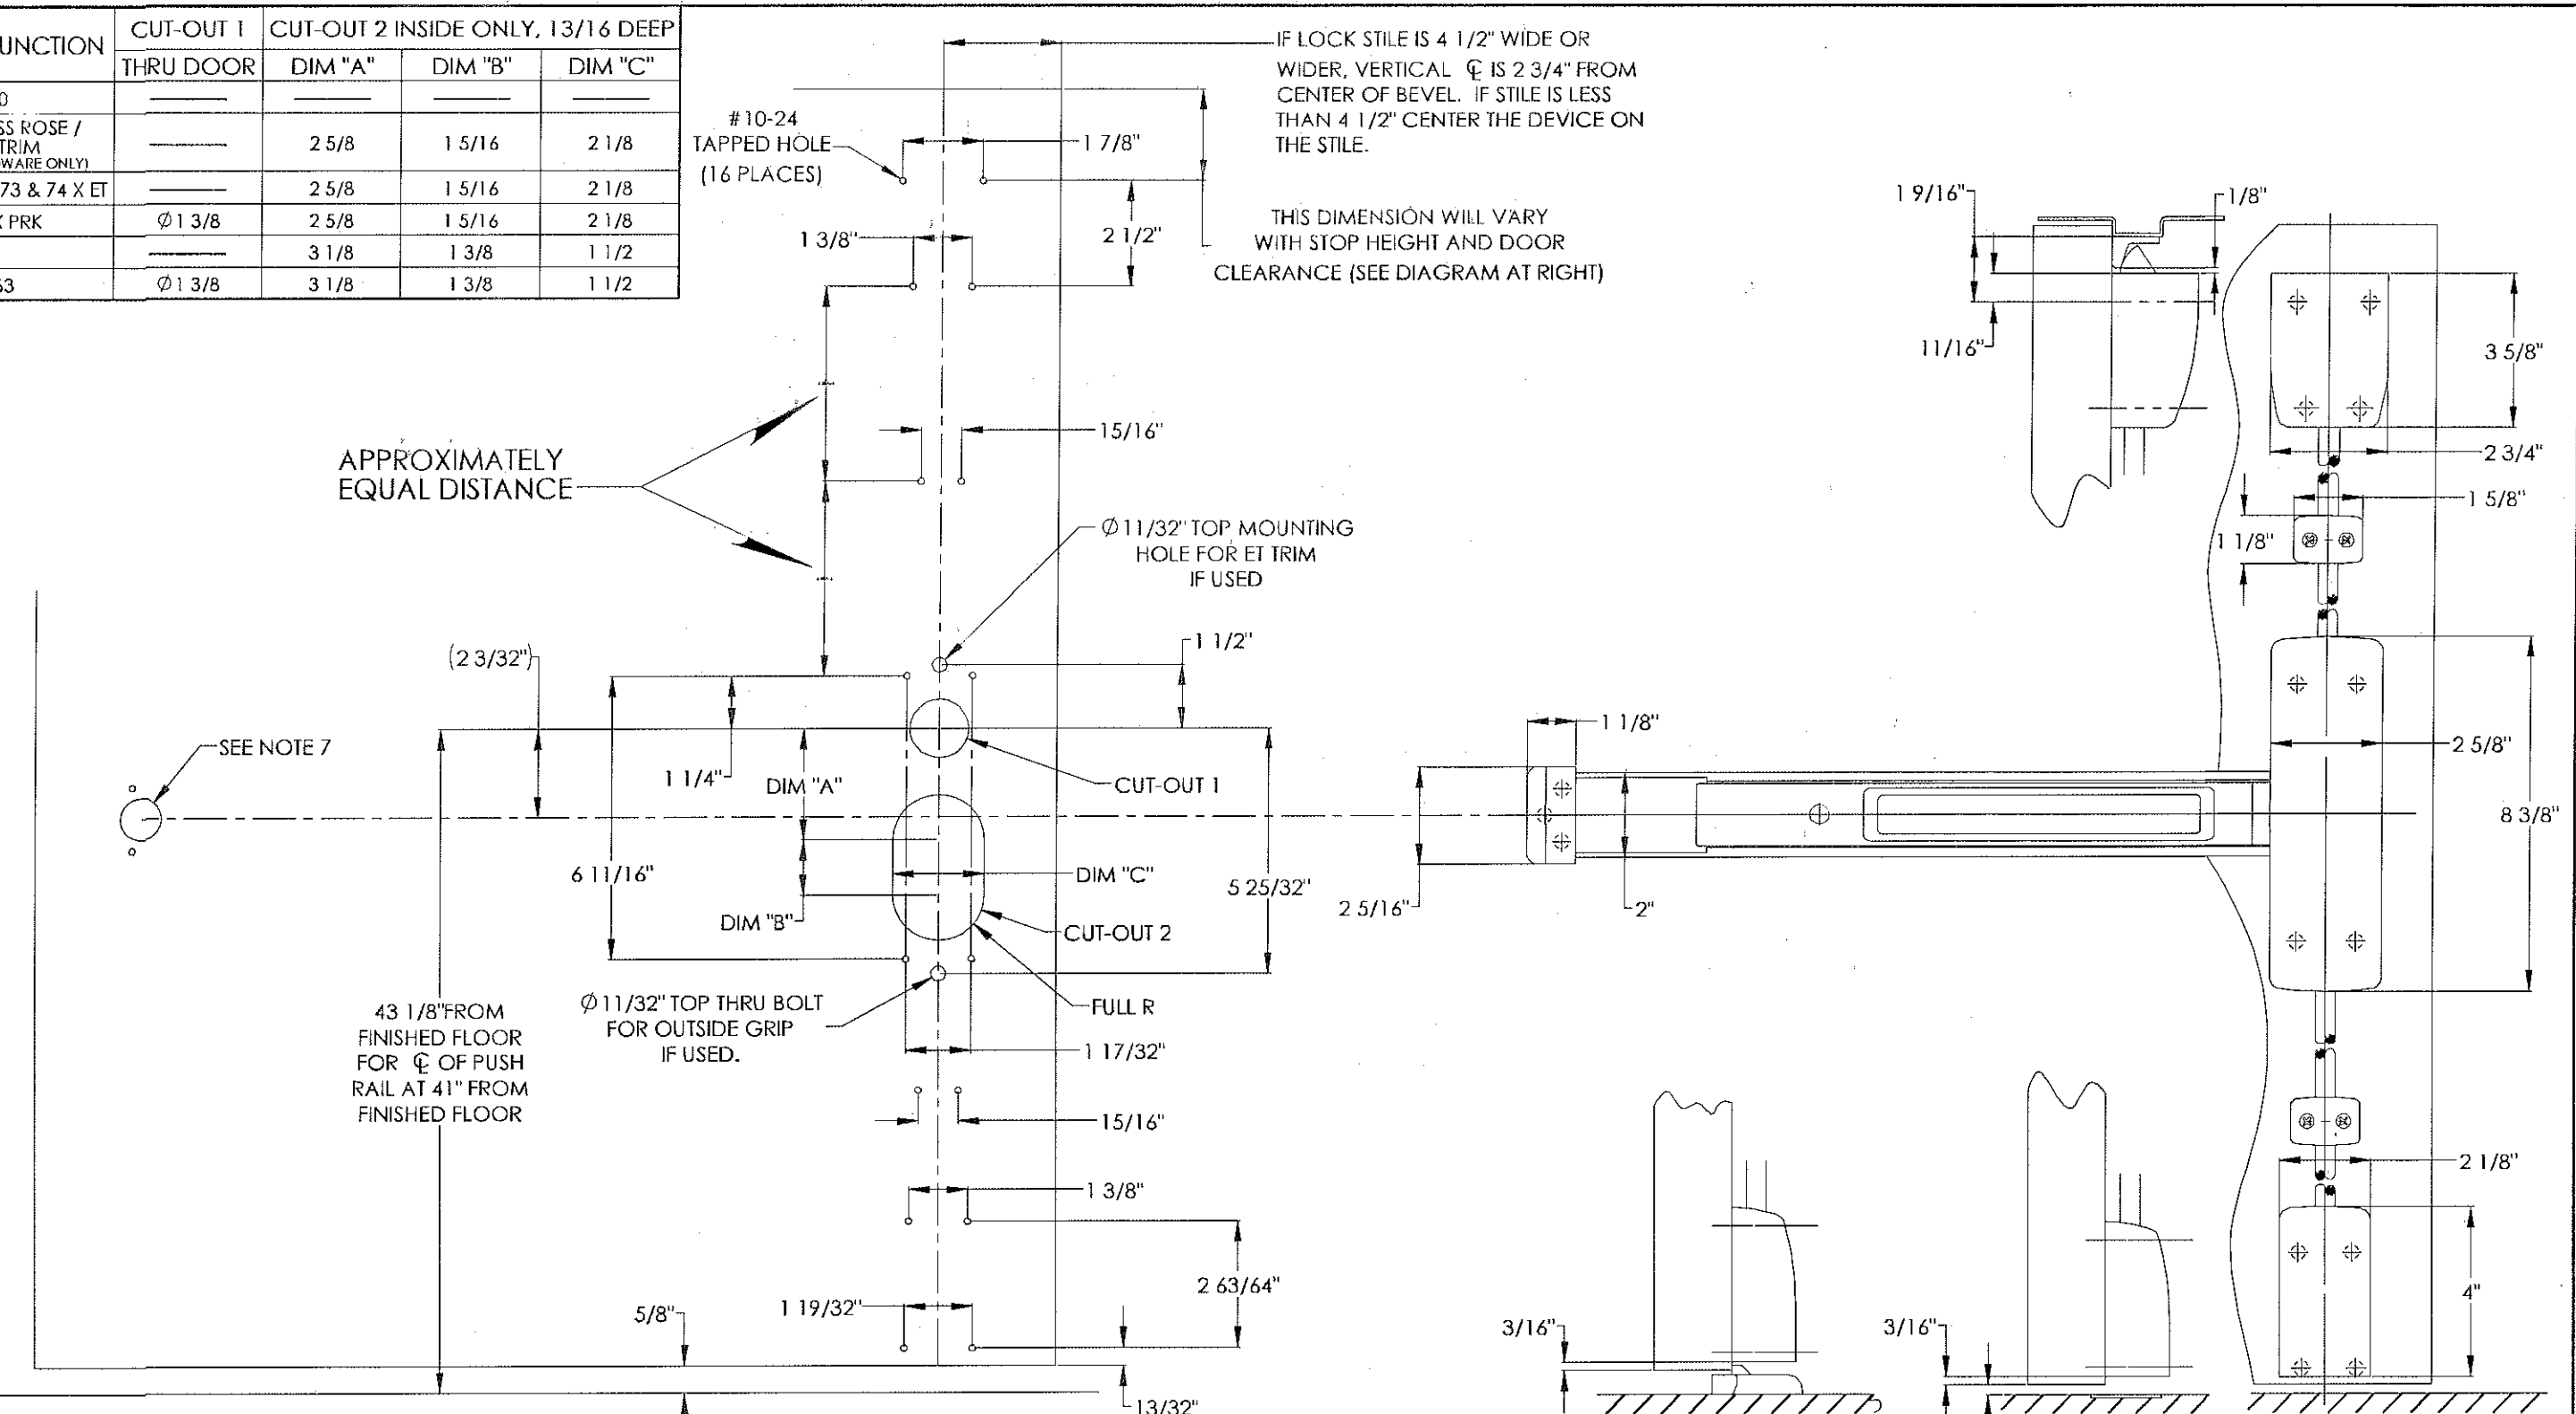

- NOTES:
1. TOLERANCE ON ALL DIMENSIONS ±1/64.
 2. WE RECOMMEND ALL TAPPED HOLES BE DRILLED AND TAPPED IN FIELD.
 3. SEE STRIKE TEMPLATE No. 4413 FOR TOP AND BOTTOM STRIKES.
 4. SEE MASTER SHEET No. 4019 FOR AREAS REQUIRING REINFORCEMENT.
 5. SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED MUST BE FLUSH.
 6. FOR GLASS BEADED DOORS, IF GLASS BEAD CAN NOT BE REMOVED, USE SHIM KIT 12-587.
 7. SEE TEMPLATES No. 4569 AND 4571 FOR ELECTROLYNX DETAILS WHEN NEEDED.
 8. FOR PRK TRIM SEE TEMPLATE 4051, FOR ET TRIM SEE TEMPLATE 4277

SARGENT Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DOOR MANUFACTURERS TEMPLATE:
12-8700
SURFACE VERTICAL ROD EXIT DEVICE

RELEASE DATE
31 JAN 06

TEMPLATE NO.
4297 H