
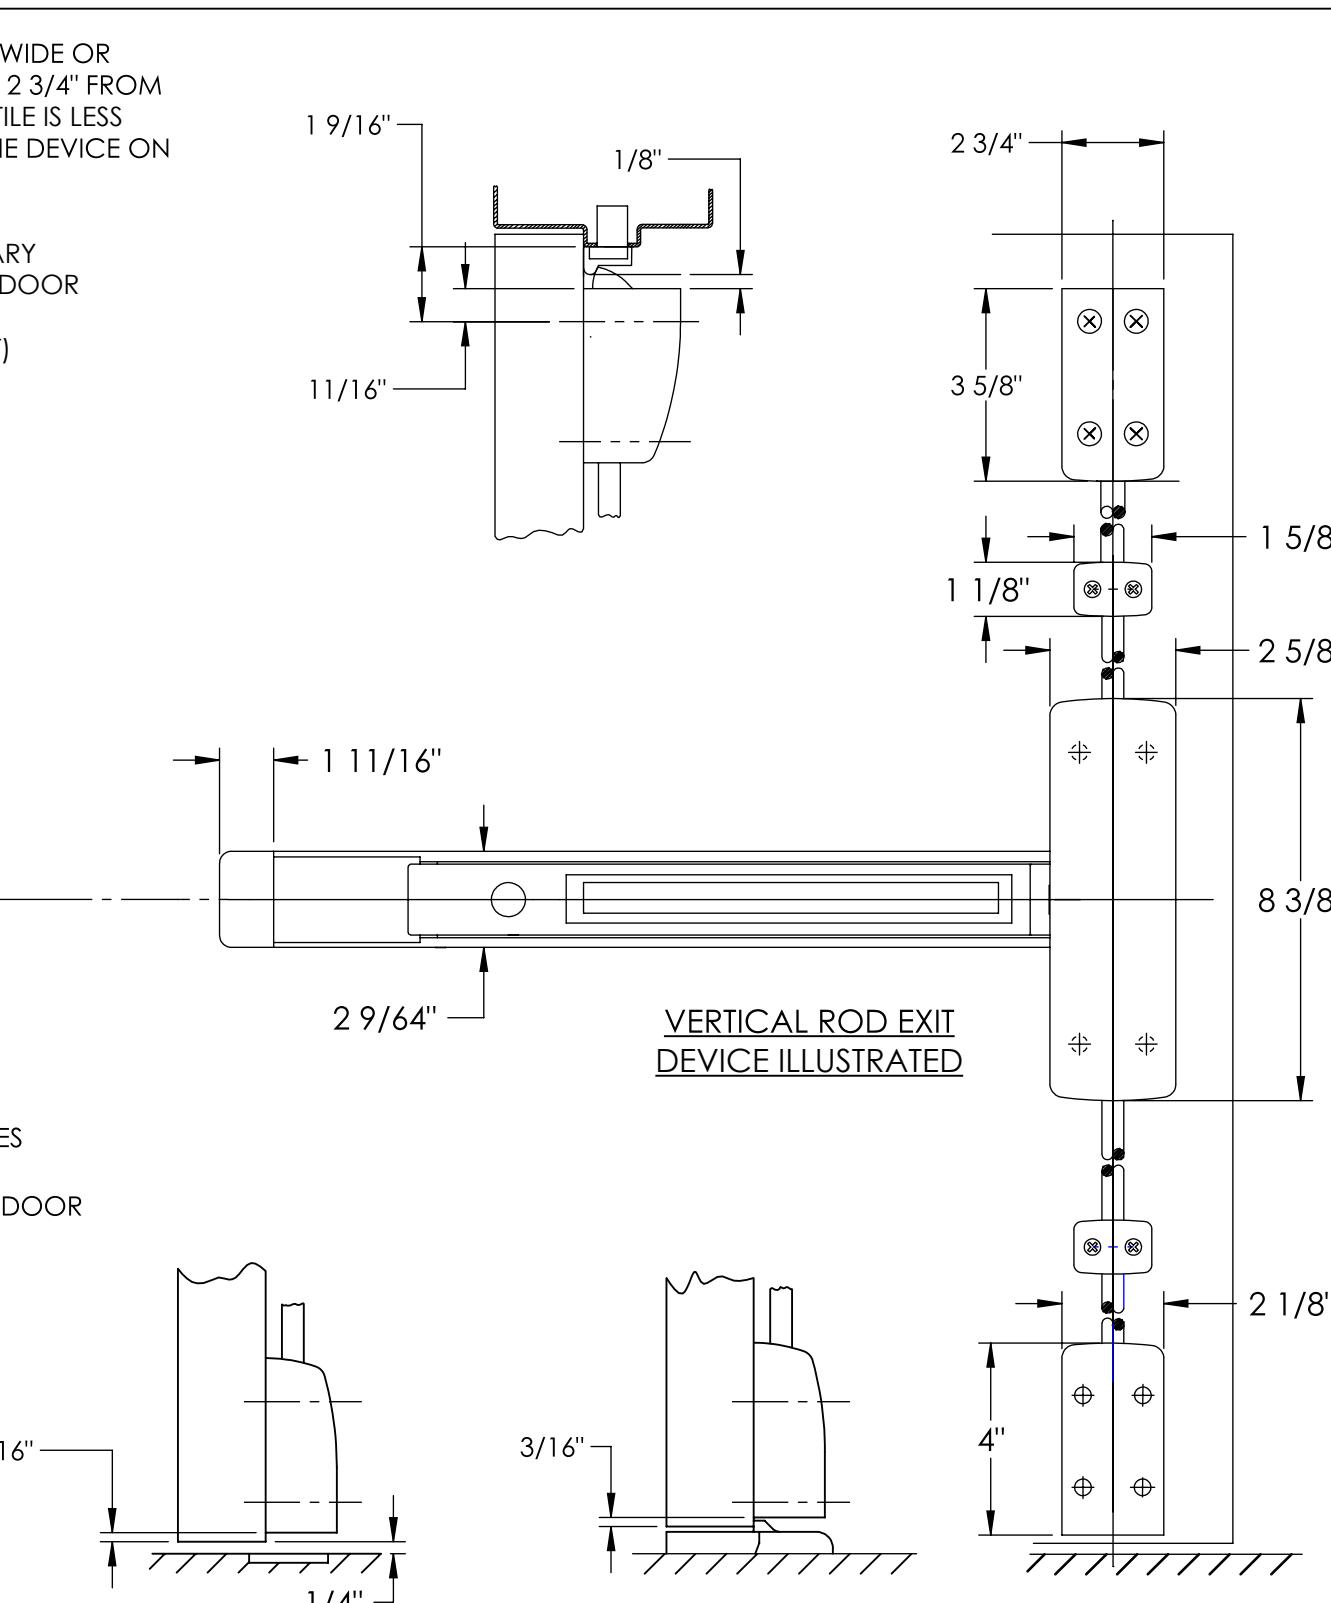


EXIT DEVICE FUNCTION	CUT-OUT 1		CUT-OUT 2 INSIDE ONLY, 13/16 DEEP	
	THRU DOOR	DIM "A"	DIM "B"	DIM "C"
10 & 40	-----	-----	-----	-----
06, 13, 15, 43, 46, 73 & 74 X ET	-----	1/2"	1 5/16"	2 1/8"
28	-----	1"	1 3/8"	1 1/2"
62 OR 63	Φ 1 3/8"	1"	1 3/8"	1 1/2"

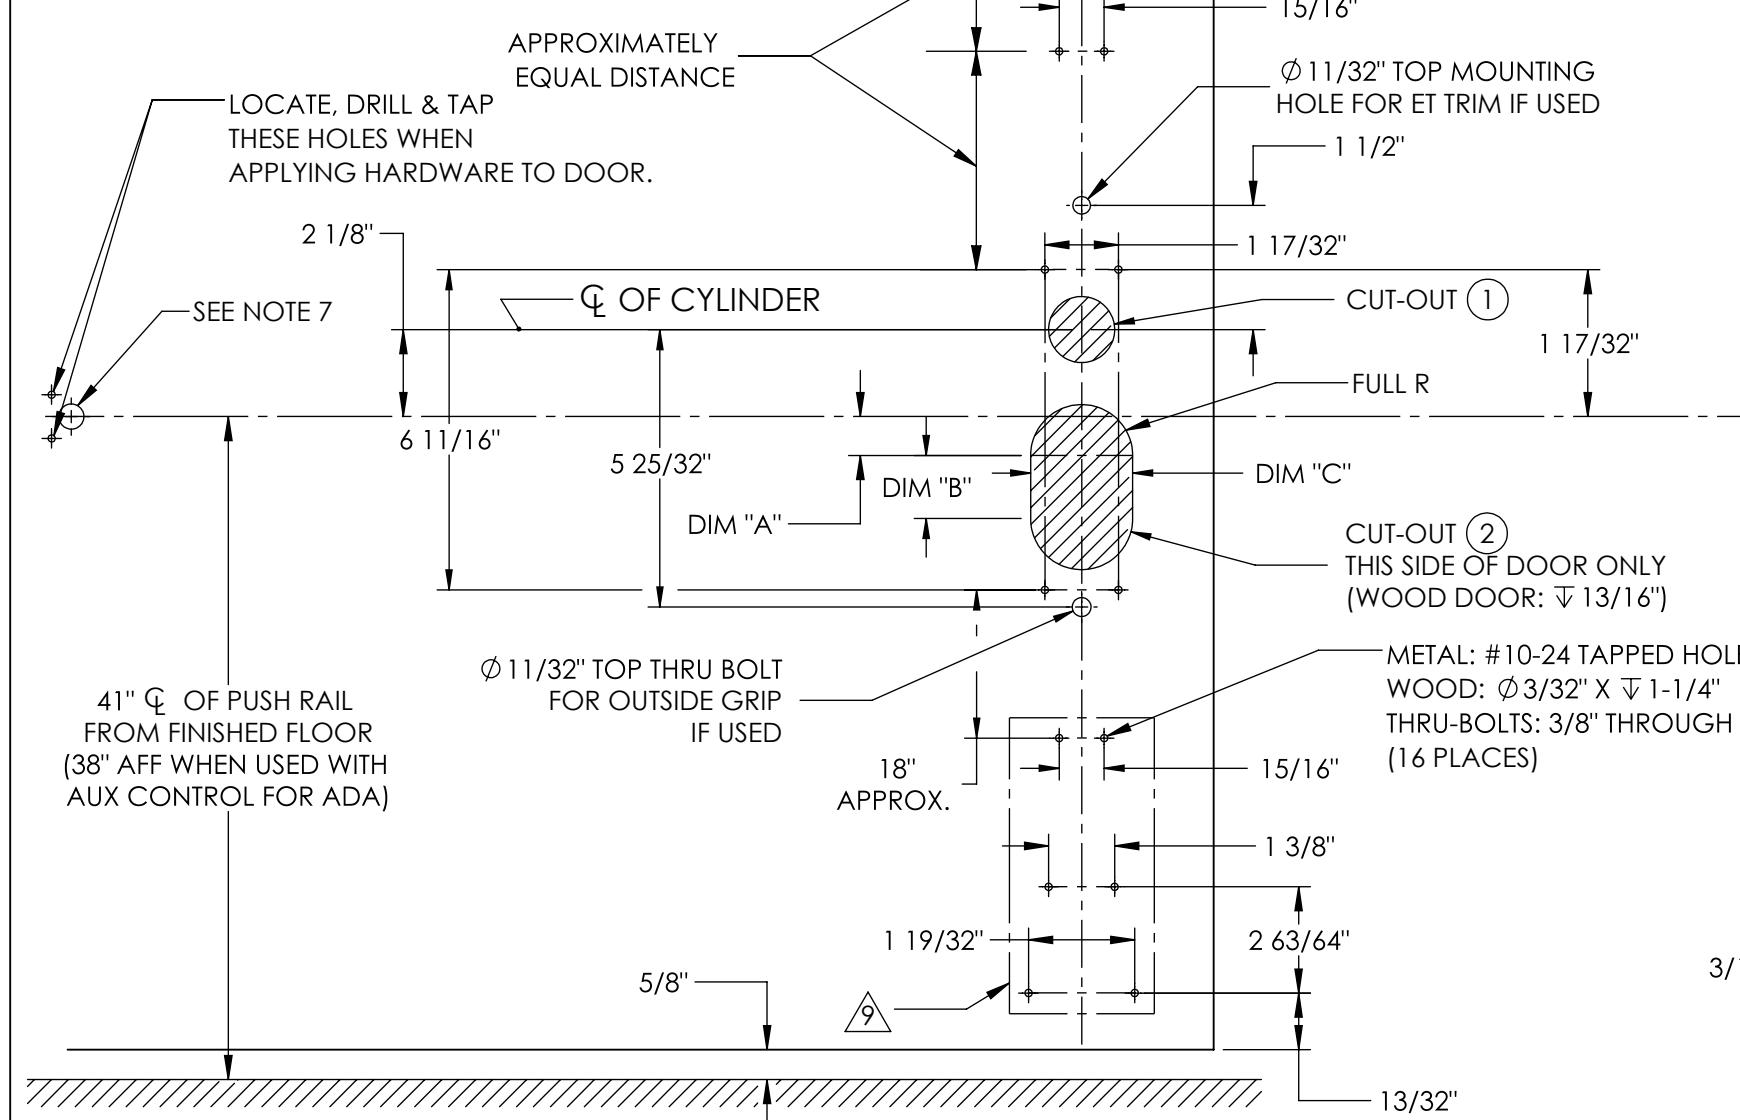

NOTES:

1. TOLERANCE ON ALL DIMENSIONS $\pm 1/64$.
2. WE RECOMMEND THAT ALL TAPPED HOLES BE DRILLED AND TAPPED IN FIELD.
3. SEE STRIKE TEMPLATE No. 4413 FOR TOP AND BOTTOM STRIKES.
4. SEE MASTER SHEET No. 4019 FOR AREAS REQUIRING REINFORCEMENT.
5. SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED MUST BE FLUSH.
6. FOR GLASS BEADED DOORS, IF GLASS BEAD CAN NOT BE REMOVED, USE SHIM KIT 12-587.
7. SEE TEMPLATES NO. 4569 AND 4571 FOR ELECTROLYNX DETAILS WHEN NEEDED.
8. FOR ET TRIM SEE TEMPLATE 4277.

9. FOR NB- (LESS BOTTOM ROD) OPTION, OMIT BOTTOM HOLES.

ASSA ABLOY

Opening Solutions

ASSA ABLOY

ASSA ABLOY

ASSA ABLOY

ASSA ABLOY

ASSA ABLOY

DOOR MANUFACTURERS TEMPLATE:
FIRE RATED SURFACE VERTICAL ROD EXIT DEVICE
12-8700 & 12-NB-8700

RELEASE DATE
6/20/2025
TEMPLATE NO.
4297