EXIT DEVICE FUNCTION	CUT-OUT (1) THRU DOOR	CUT-OUT (2) THRU ONE SIDE OF DOOR ONLY DIM. "A"	DIM. "B"	DIM. "C"
10	—	—	—	—
06, 08, 13, 15 ± SCREWLESS BOSS INACTIVE TRIM	1 3/8" DIA.*	2 5/8"	1 5/16"	2 1/8"
28, 62 & 53	1 3/8" DIA.	3 1/8"	1 3/8"	1 1/2"

* CYLINDER HOLE NOT REQUIRED FOR 06 OR 13 FUNCTION WHEN ET LEVER HANDLE CONTROL OR 300 SERIES AUXILIARY CONTROL IS USED

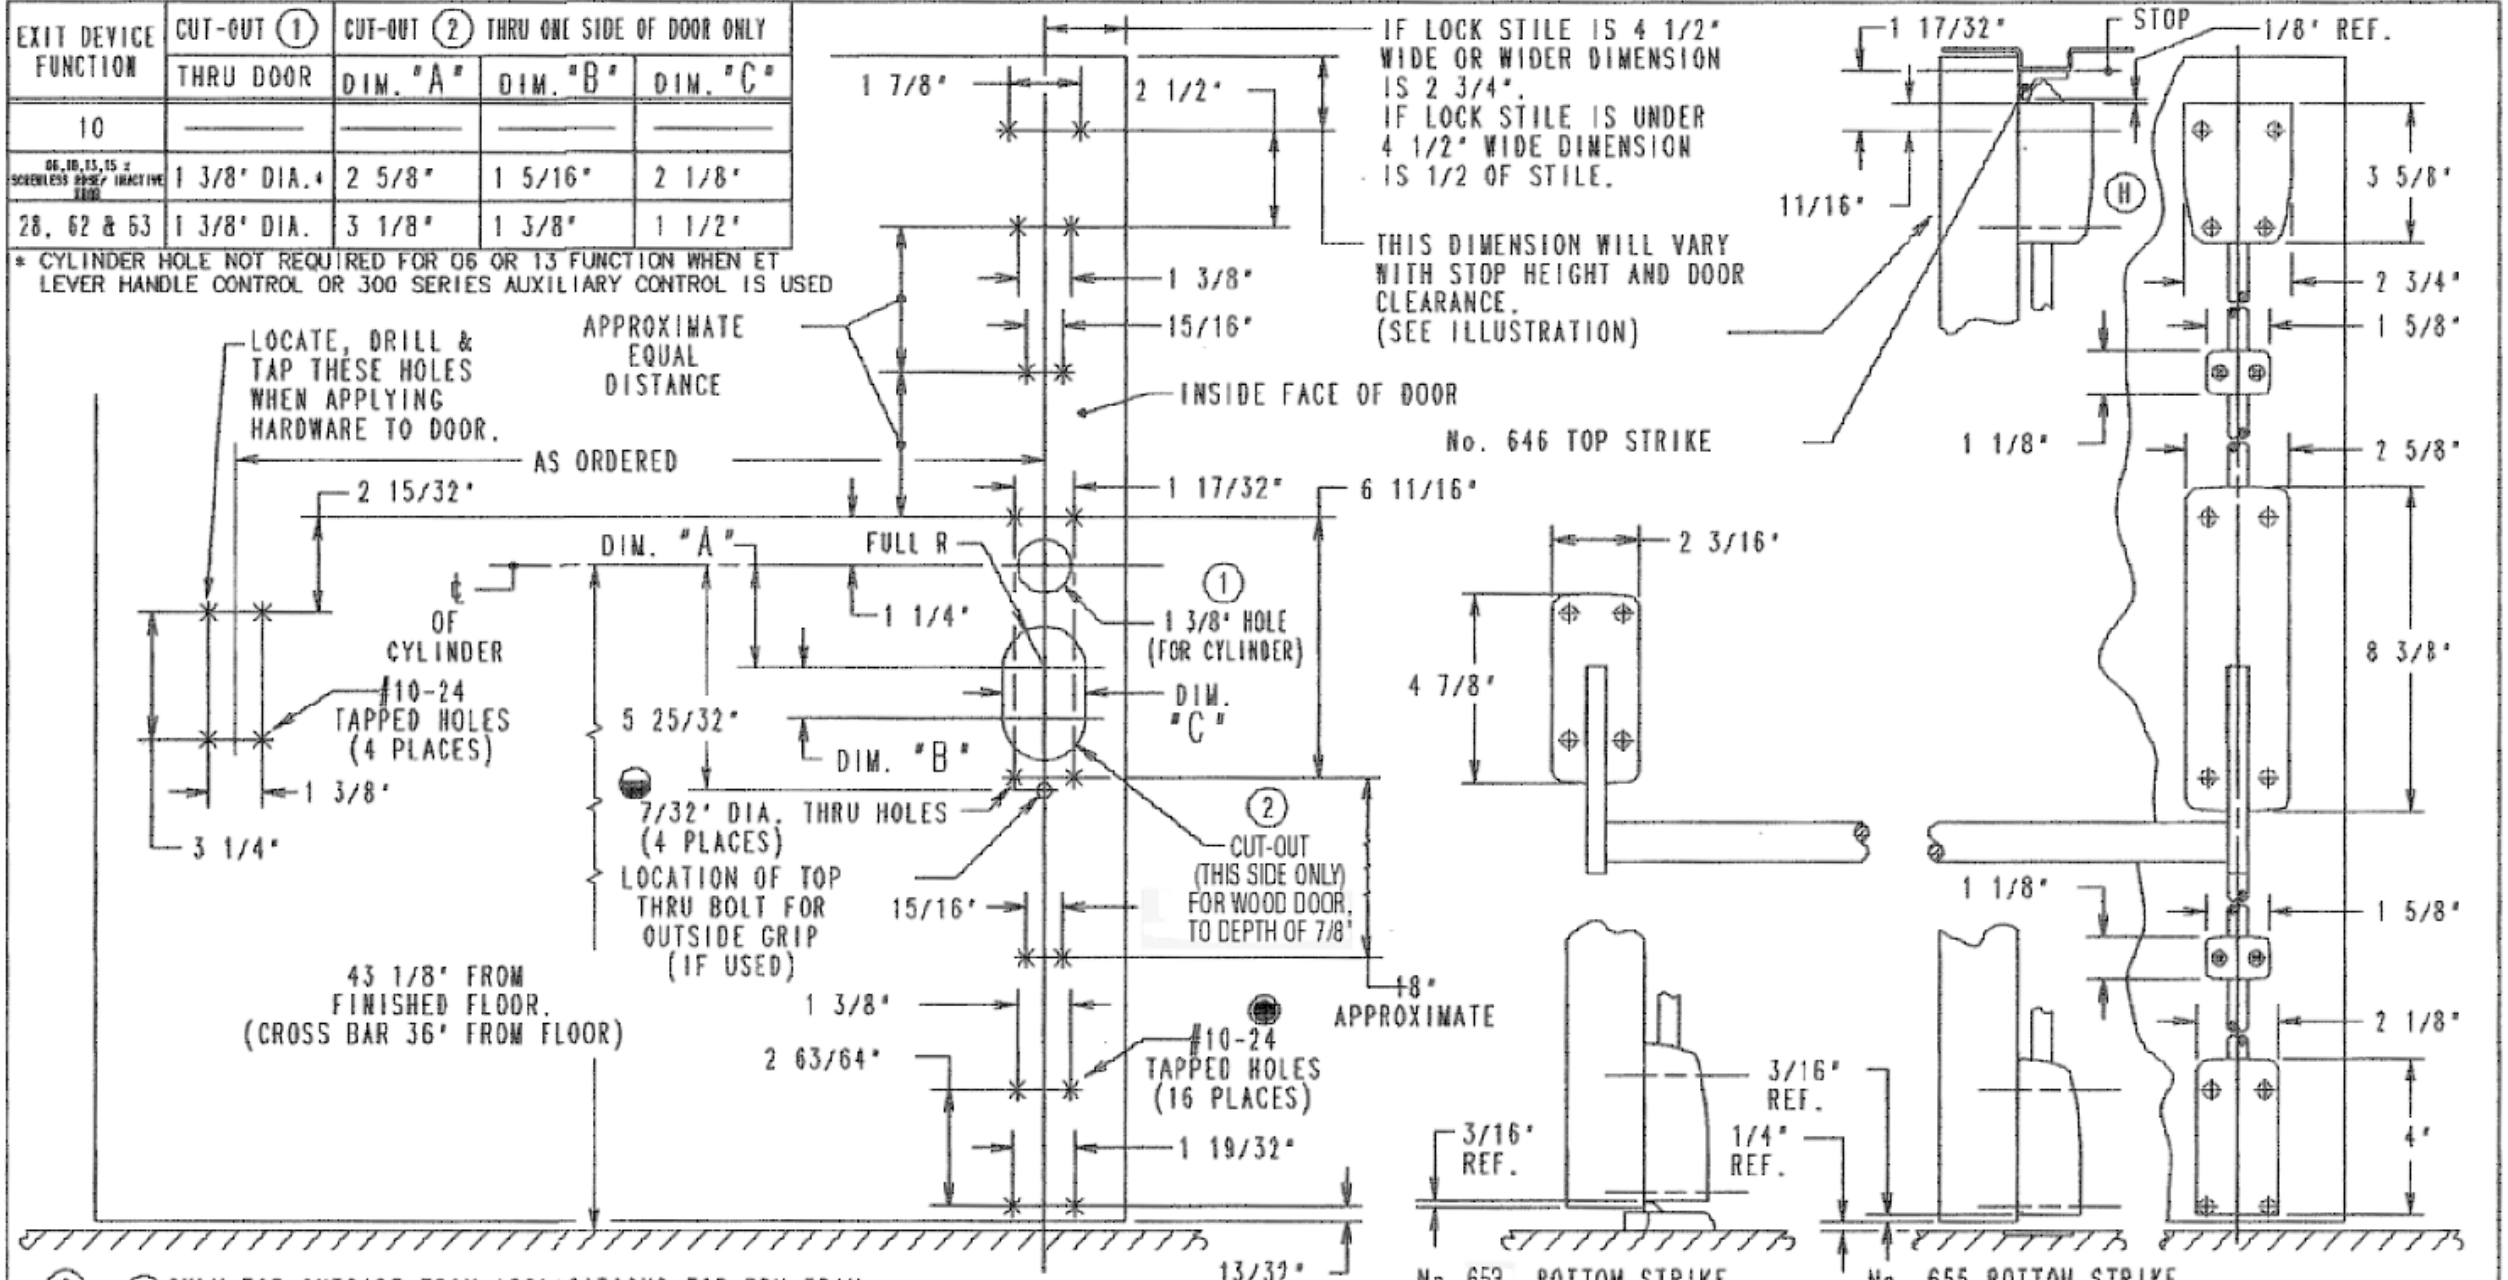

(6) — ONLY FOR OUTSIDE TRIM APPLICATIONS FOR PRK TRIM.

(5) — SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED MUST BE FLUSH.

(4) — SEE MASTER SHEET No. 4019 FOR AREAS REQUIRING REINFORCEMENTS.

(3) — SEE STRIKE TEMPLATE No. 4413 FOR TOP AND BOTTOM STRIKES.

(2) — WE RECOMMEND THAT ALL TAPPED HOLES BE DRILLED & TAPPED IN FIELD.

(1) — TOLERANCE ON ALL DIMENSIONS ±1/64".

SARGENT

ASSA ABLOY

ASSA ABLOY, the global leader in door opening solutions

Copyright © 2011, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

TEMPLATE: 12-9700 (MD&WD)
VERTICAL ROD EXIT DEVICE
CENTER CASE SURFACE APPLIED

RELEASE DATE 12/11

TEMP. NO. 4046L