



REQUIREMENTS

FUNCTION	1	2	3	4	5	6	7	8	9	10	11
	1.125" (1-1/8") DIA.	1.125" (1-1/8") DIA.	1.250" (1-1/4") DIA.	.625" (5/8") DIA.	.625" (5/8") DIA.	.250 (1/4") DIA.	.250 (1/4") DIA.	.375 (3/8") DIA.	.281 (9/32") DIA.	.125 (1/8") DIA.	1.250" (1-1/4") DIA.
04, 27, 30, 37, 55, 70, 71	■	■	■			■	■				
06	■		■			■					
05*, 24, 25, 28, 43, 45, 47, 50, 51, 56, 57, 58, 67	■	■	■	■		■	■	■	■		
13	■					■					
15	■	■				■	■				
16,17, 26, 29, 38, 39, 40, 41, 42, 46, 48, 49, 52, 59, 72, 73	■	■	■			■	■				■
31, 35, 36		■	■				■				
65, 66, 68	■	■		■	■		■	■	■	■	

*ALL 05 LOCKS MANUFACTURED PRIOR TO 7/6/04 USE 55 FUNCTION DOOR PREP.

THIS TEMPLATE COVERS THE 7800, 8200 & 9200 SERIES LOCKSET IN ACCORDANCE WITH THE SPECIFICATIONS INDICATED BELOW:

LOCK LINES & VARIATIONS	VARIABLE DIMENSIONS	
	DIM. A	DIM. B
7800, 8200 & 9200	1.125 [1-1/8"]	4.563 [4-9/16"]
8270-8273 FUNCTIONS, 56/RX/LX/DX PREFIX	1.250 [1-1/4"]	4.563 [4-9/16"]
ONE-SIDED TRIM ONLY FUNCTIONS 06, 13, 31,35, 36	1.250 [1-1/4"]	4.563 [4-9/16"]
74- PREFIX	1.125 [1-1/8"]	4.563 [4-9/16"]

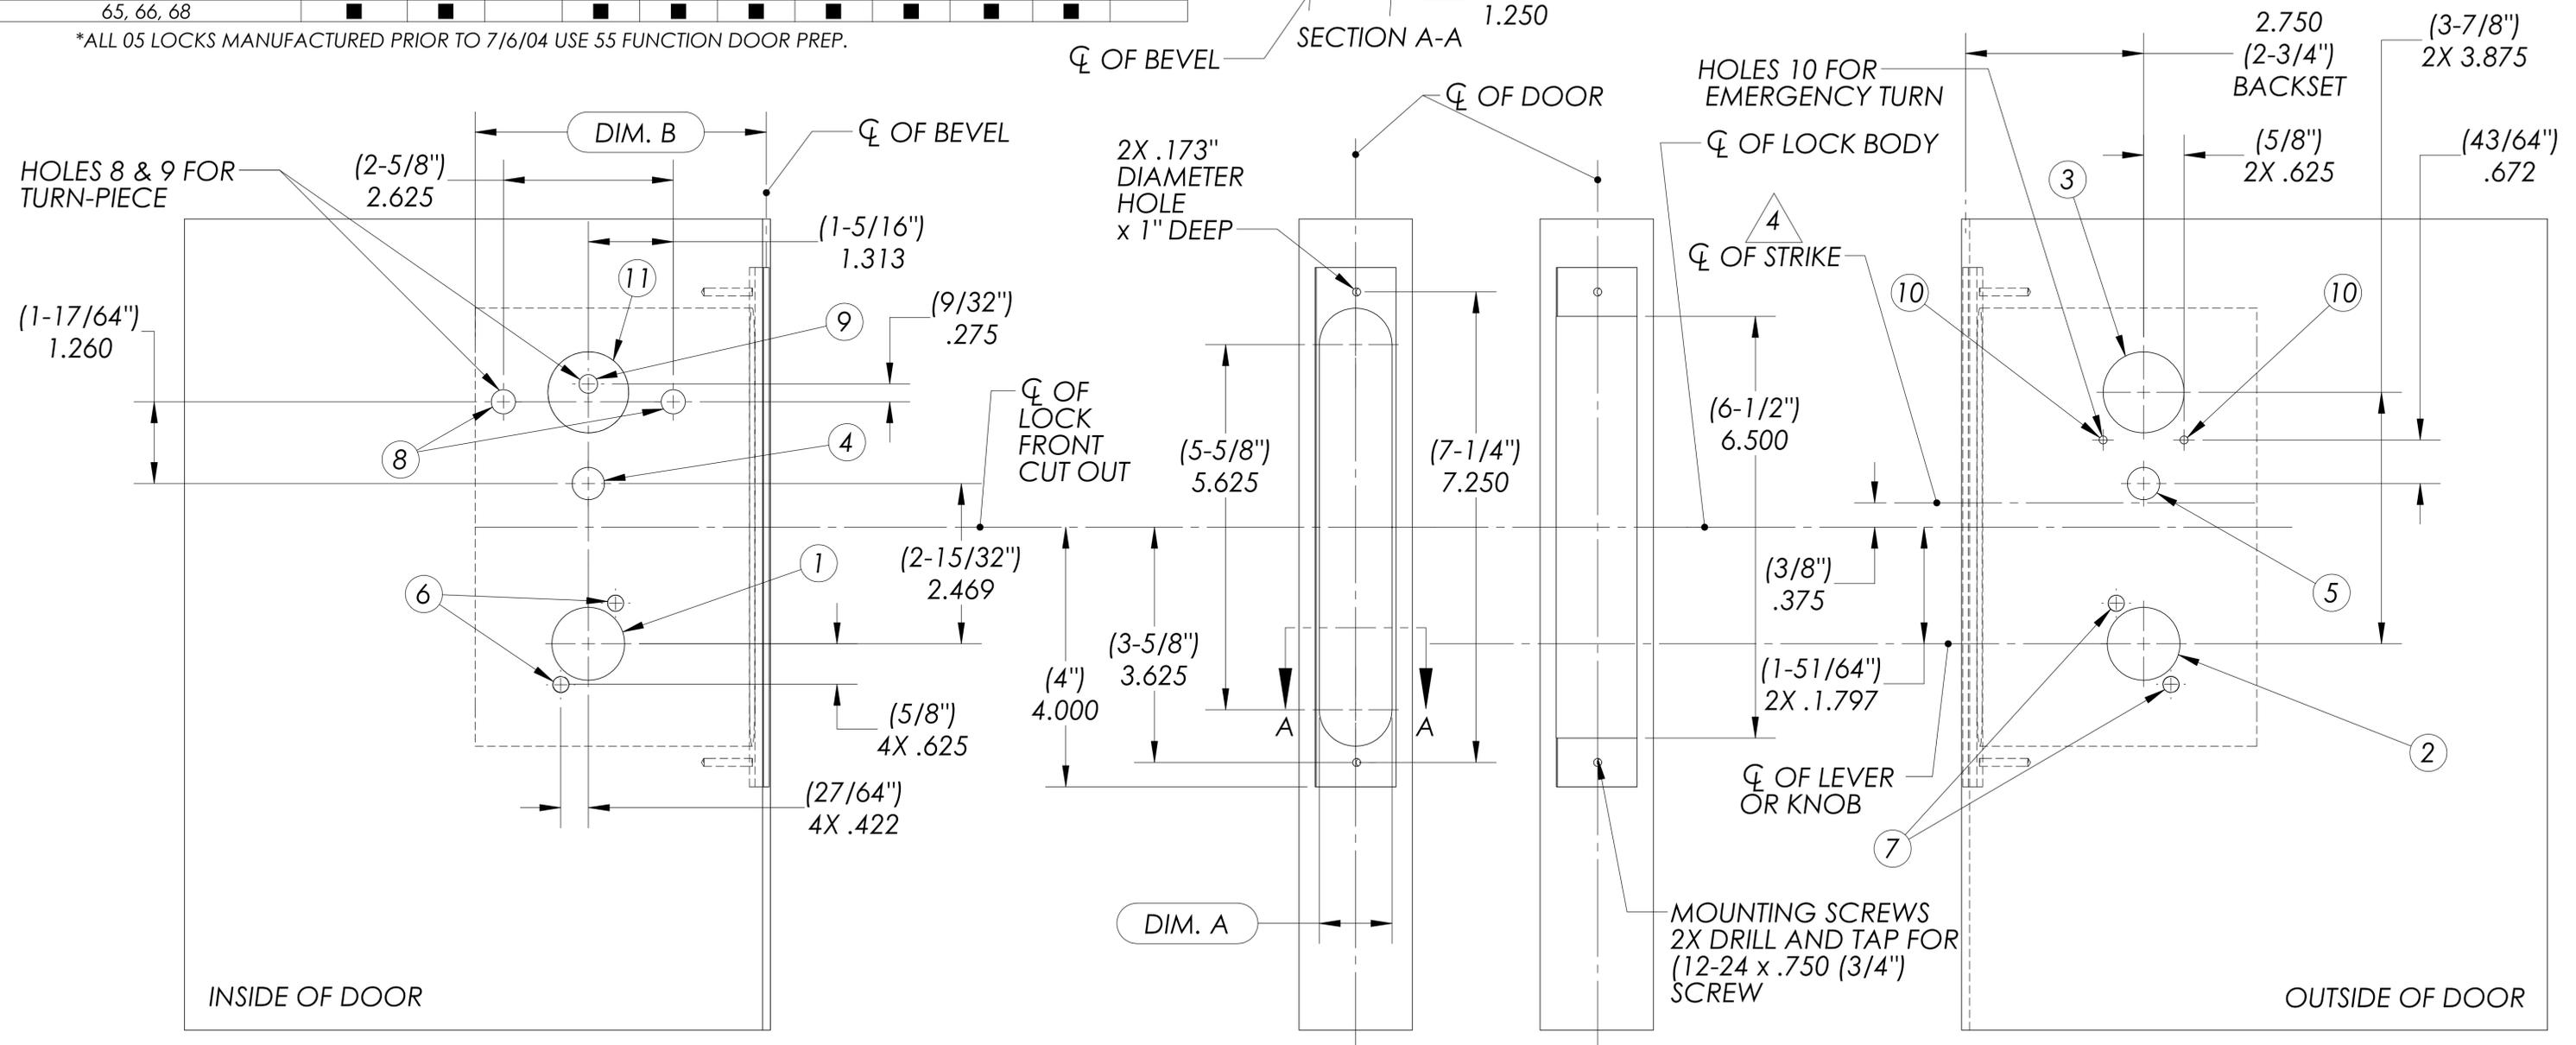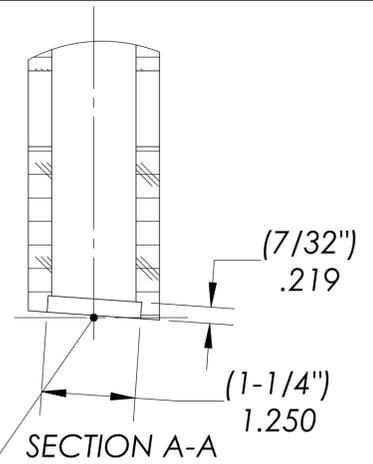

- NOTES:
1. ■ DENOTES HOLE REQUIREMENTS FOR FUNCTIONS LISTED. (CHECK TABLE BEFORE CUTTING HOLE.)
 2. REFER TO TRIM TEMPLATE FOR ADDITIONAL HOLES REQUIREMENTS.
 3. SUITABLE REINFORCEMENTS REQUIRED FOR METAL DOORS.
 4. FOR DETAILS, SEE STRIKE TEMPLATE 7063.
 5. FOR ADDITIONAL DETAIL FOR ELECTRICALLY OPERATED FUNCTIONS (70, 71, 72 & 73), SEE TEMPLATE 7065.

SARGENT
ASSA ABLOY

TEMPLATE: 8200 & 9200 BHD, BHL & ALP TRIM

03-MAR-26

4745 4