


FUNCTION	REQUIREMENTS												
	1 1.125 (1-1/8") DIA.	2 1.125 (1-1/8") DIA.	3 .563" (9/16") DIA.	4 .1250 (1-1/4") DIA.	5 .500 (1/2") DIA.	6 .250 (1/4") DIA.	7 .250 (1/4") DIA.	8 .563" (9/16") DIA.	9 .375" (3/8") DIA.	10 .281" (9/32") DIA.	11 .125 (1/8") DIA.	12 .1250 (1-1/4") DIA.	13
03, 21													
04, 27, 30, 37, 55, 70, 71, 89	■	■	■	■	■	■	■	■	■	■			
06, 91	■	■		■									
05*, 24, 25, 28, 43, 45, 47, 50, 51, 56, 67, 281, 57, 58, NAC-280/281	■	■	■	■	■		■	■	■	■	■		
13, 95	■	■					■						
15, 96, 97	■	■	■				■	■	■				
16, 17, 26, 29, 38, 39, 40, 41, 46, 48, 49, 52, 59, 72, 73, 90	■	■	■	■			■	■	■		■		
20				■									
22											■		
23					■			■	■				
31, 35, 36	■	■			■		■	■	■				
65, 66, 68	■	■				▲		■	■				
92											■		

*ALL 05 FUNCTION LOCKS MANUFACTURED PRIOR TO 7/6/04 USE 55 FUNCTION DOOR PREP.

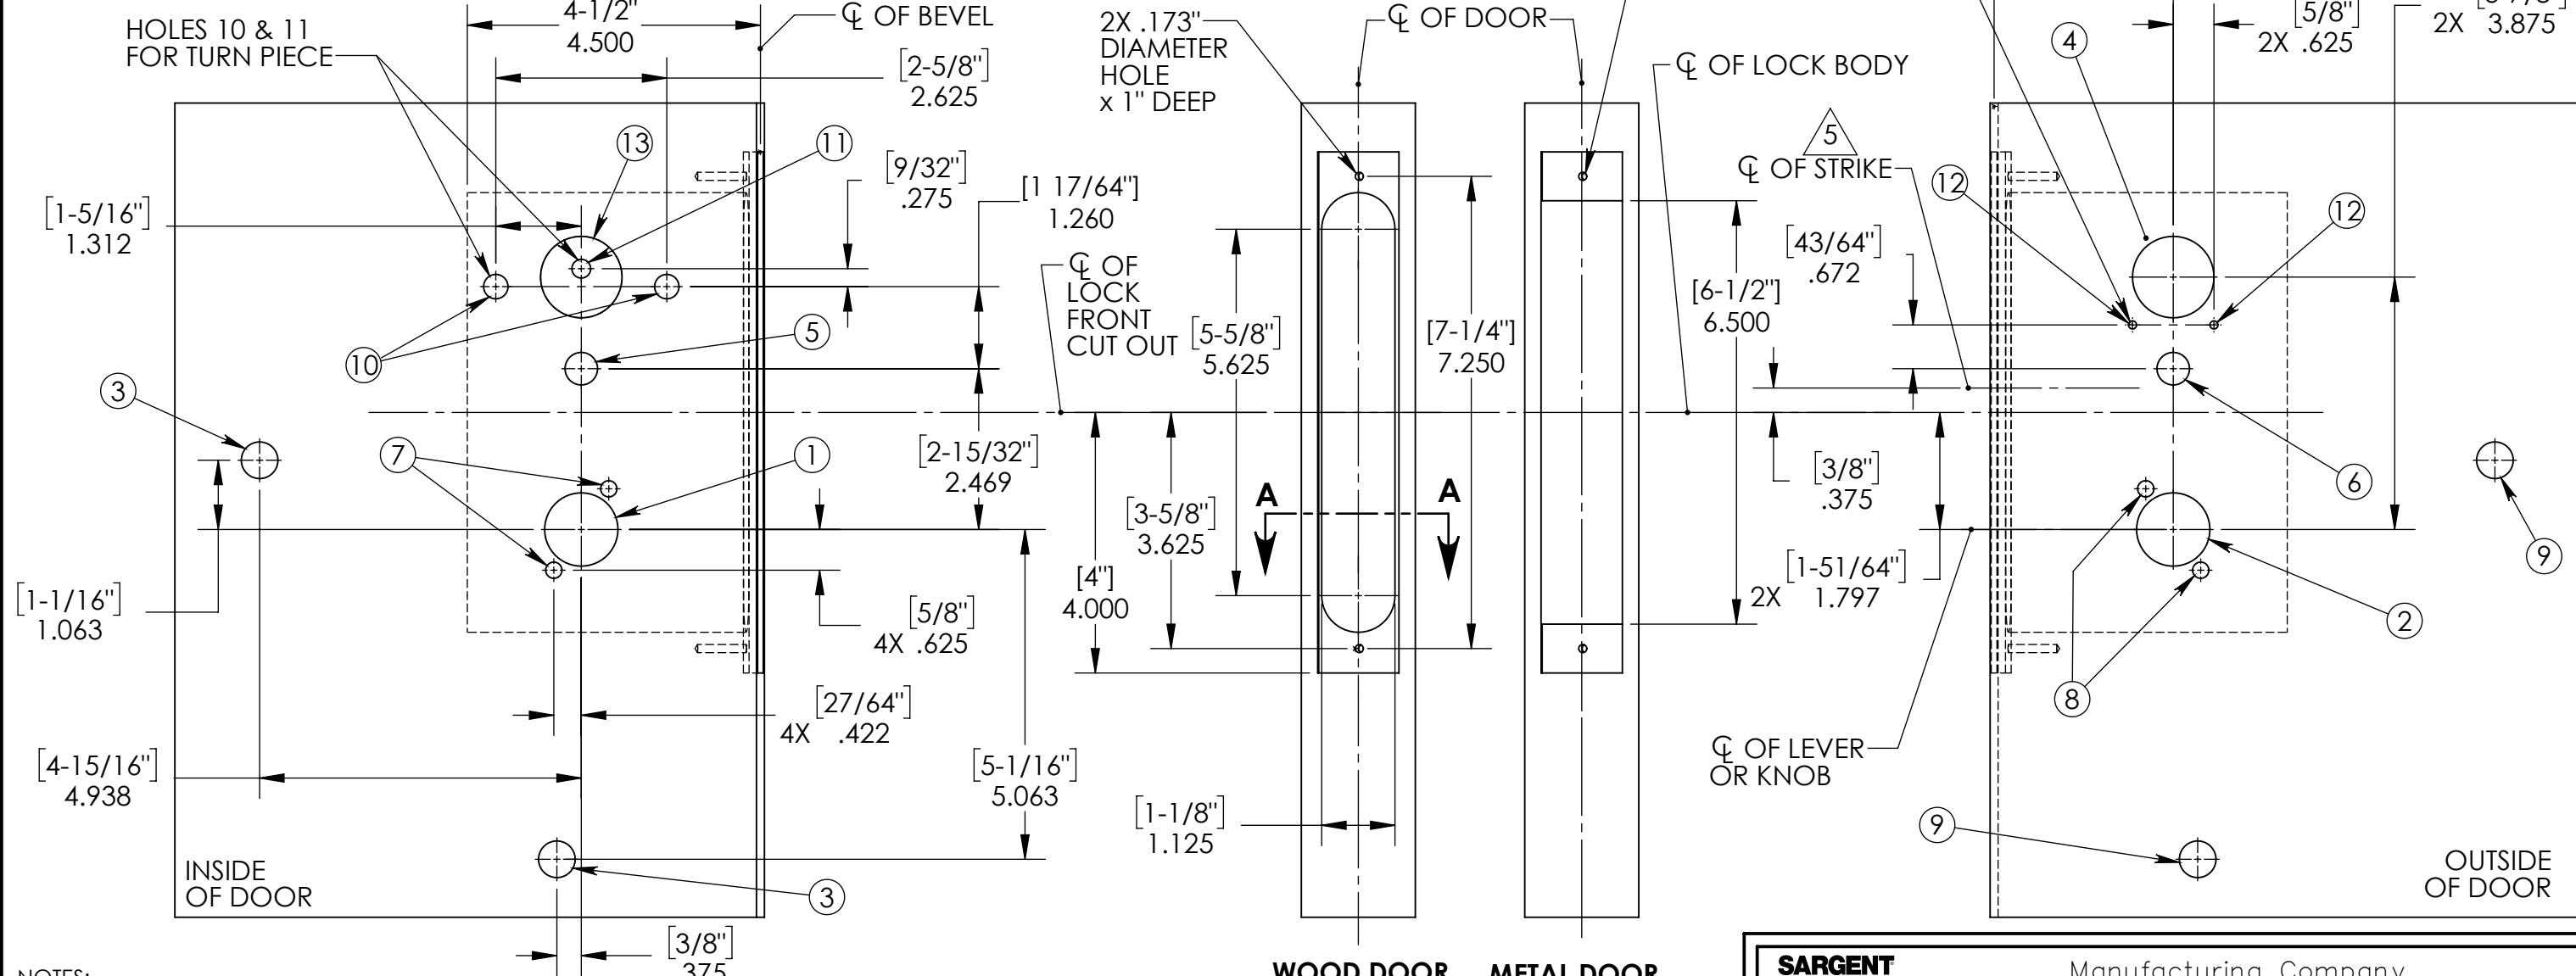

NOTES:

- DENOTES HOLE REQUIRED FOR FUNCTION LISTED. (CHECK TABLE BEFORE CUTTING HOLE.)
- ▲ DENOTES HOLE #7 NOT REQUIRED FOR 7892 LOCKSET.
- REFER TO TRIM TEMPLATE FOR ADDITIONAL HOLE REQUIREMENTS.
- SUITABLE REINFORCEMENTS REQUIRED FOR METAL DOORS.
- FOR DETAILS, SEE STRIKE TEMPLATE 7063.
- FOR ADDITIONAL DETAIL FOR SOLENOID OPERATED FUNCTIONS (70, 71, 72 & 73), SEE TEMPLATE 7065.

DETAIL OF SUGGESTED DOOR-CUT

SARGENT
ASSA ABLOY

Manufacturing Company 100 Sargent Drive New Haven, CT 06511	RELEASE DATE 6/21/22
TEMPLATE: 8200 & 9200 BHW LEVER	TEMPLATE NO. 4711 4